Profile:



TRACE™ Pro

TRACE™ Pro is an indoor/outdoor low voltage lighting system used primarily for direct or indirect lighting designs. TRACE™ Pro Horizontal and TRACE™ Pro Vertical profiles the same.

Please verify the contents of the packages!

Please read instructions entirely before starting installation.
Be sure power is turned off before installing the system.
Call Tivoli, LLC tech support with questions.

Caution: TRACE™ Pro is designed to work with listed Class 2 24V DC transformers only. Use of any other power source will cause damage, shorten the life of the fixture and will void the warranty.

Consult any and all applicable local and national codes for installation.

Do not conceal or extend exposed conductors through a building wall as per local electrical code.

Warning: With any luminaire for any application, basic safety precautions should always be followed to reduce the risk of fire, electric shock and personal injuries. This lighting system should be installed by a certified professional.

WARNINGS

TRACE™ Pro MAY BE EASILY DAMAGED! The reliability of the product can only be ensured if these warnings and cautions are complied with faithfully. Keep these instructions for future maintenance work.

WARNING! Risk of product damage.
Longer runs of TRACE™ Pro lighting strands must be installed by at least two people.

IMPORTANT! The TRACE™ Pro luminaire must not be allowed to bend or hang down. That way, the bending limit will not be inadvertently exceeded, which may result in product damage.

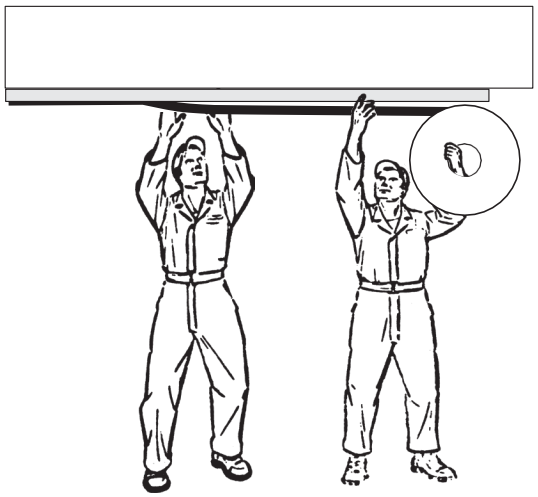

Keep Trace™ from twisting or bending in the wrong direction.
Two-person installation.

WARNING! Risk of product damage.
TRACE™ Pro must not be bent at less than 7.87″ diameter or damage will result. Do not allow TRACE™ Pro to twist or bend in the wrong direction.

WARNING! Risk of product damage.
Insert TRACE™ Pro into channel evenly and gradually to keep twisting and bending to a minimum.

TRACE™ Pro Horizontal

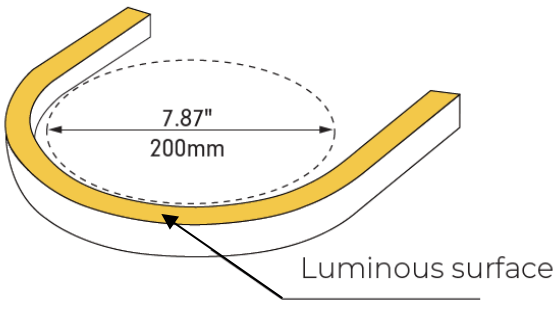

TRACE™ Pro Vertical

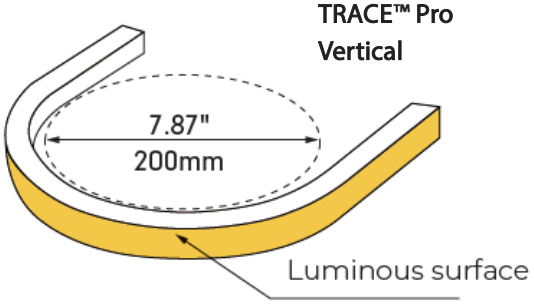

7101004

Copyright © 2021 Tivoli 09.29.2021

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Overview: Read Before Installing Luminaire

Installation Notes:

Step 1: Measure run area where TRACE™ Pro is to be installed. Locate power feed end at highest point of the run to minimize exposure to water run off.

Step 2: A Mounting Channel is recommended for outdoor applications. Lay channel along desired area and attach with screws (by others) every 18 to 24 inches. If the design requires creating bends and arcs, it is recommended that the Notched Channel be used.

Note: Minimum bending diameter for the notched channel is 11". TRACE™ Pro must not be bent less than 3.5" diameter or damage will result.

Step 3: TRACE™ Pro must be installed with two people. One to press the luminaire into the channel and the other to hold the spool and unroll it while keeping the TRACE™ Pro flex body straight.

Warning: Risk of Product damage.
Do not stretch, pull, or yank. Doing so can damage the TRACE™ Pro internal connections and void the warranty.

Note: We recommend using a dry spray lubricant, such as 3M Spray Lubricant or WD-40 Specialist* for all TRACE™ Pro installations to insure the luminaire fits into the channel without damage. Additionally, Silicone Sealant (**FLXD-SIL-GE-10**) must be applied to the inside bottom surface.

***WARNING!** Risk of Product Damage.
Regular WD40 490002 will stress craze, crack or swell the TRACE™ Pro Silicone covering. Do not use!

Step 4: Insert TRACE™ Pro into mounted channel starting from power connector end. TRACE™ Pro should be pressed into the channel carefully and gradually, without excessive bending or damage will result.

Step 5: Connect to 24V DC power supply according to supplied wiring diagrams.

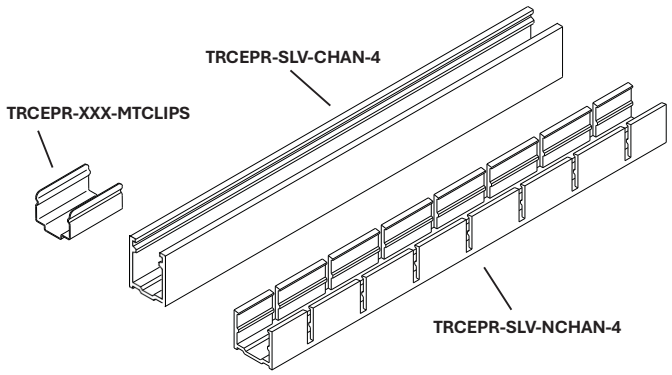

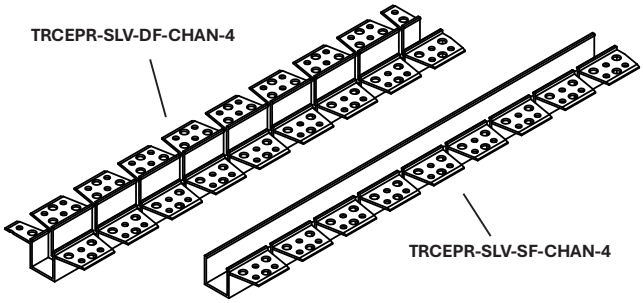

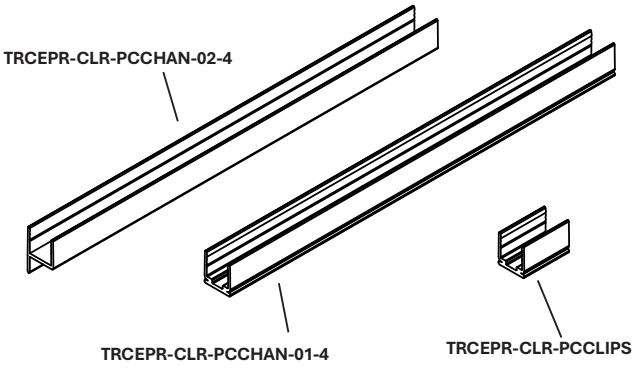

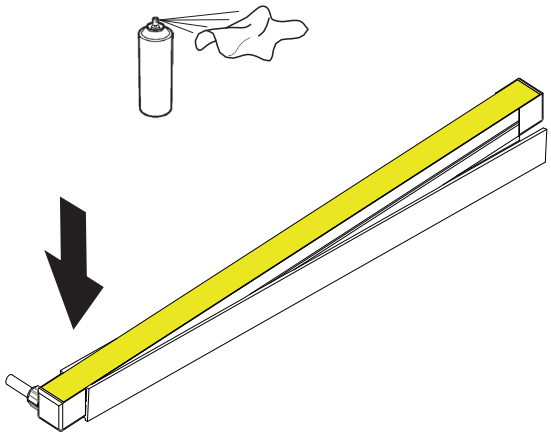

Copyright © 2021 Tivoli 09.29.2021

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Identifying your TRACE™ Pro

Both Horizontal and Vertical versions have the same profile and shape so please use the following information to help identify which version you are using to properly install and prevent damage.

TRACE™ Pro Horizontal



- Body bends perpendicular to light source.
- Printing (text) is on side of body. (Side adjacent to light source).
  - Product code is printed in text: TRCEPR-[X]-**H**-…[etc]
  - Example: TRCEPR-S-**H**-27-WHT-F1-E-24-050

TRACE™ Pro Vertical



- Body bends parallel to light source.
- Printing (text) is on side of body. (Side adjacent of light source).
  - Product code is printed in text: TRCEPR-[X]-**V**-…[etc]
  - Example: TRCEPR-S-**V**-27-WHT-F1-E-24-050

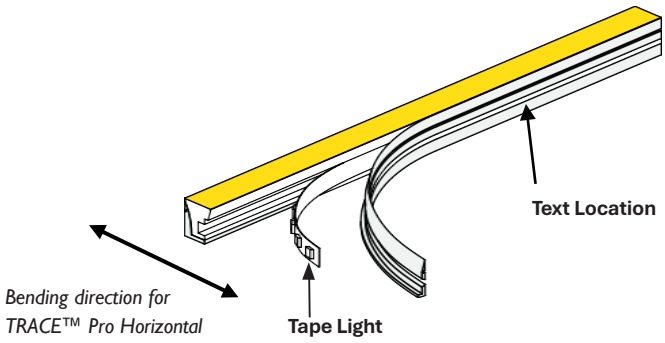

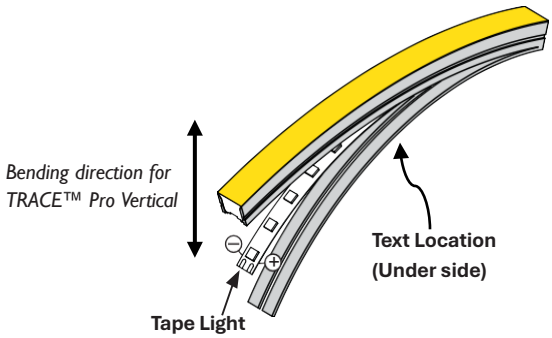

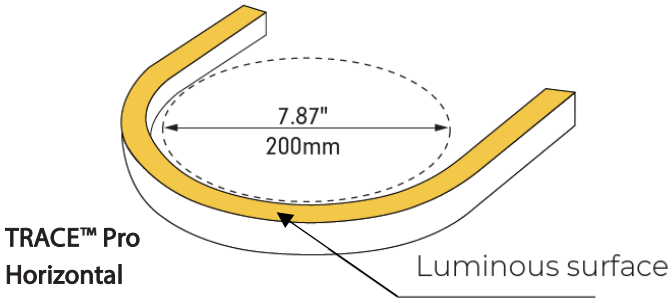

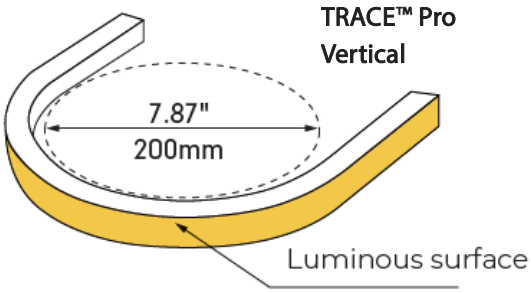

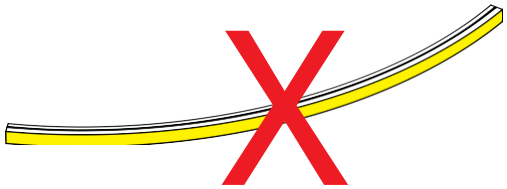

TRACE™ Pro Horizontal
Do not allow to twist or bend in the wrong direction.

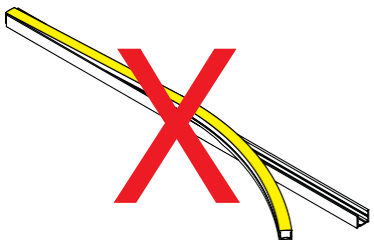

TRACE™ Pro Vertical
Do not allow to twist or bend in the wrong direction.

Copyright © 2021 Tivoli 09.29.2021

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

TRACE™ Pro Mounting: Mounting Clips

Install TRACE™ Pro with Mounting Clips

Applicable Mounting:	TRACE™ Pro Horizontal	TRACE™ Pro Vertical
TRCEPR-XXX-MTCLIPS	✓	✓
TRCEPR-CLR-PCCLIPS	✓	✓

Note: Minimum bending diameter for TRACE™ Pro is 7.87".

Step 1: Determine where the Mounting Clips will need to be installed to achieve the desired shape.

Step 2: Position the Mounting Clips and attach with screws (Included).

Step 3: Lay a bead of Silicone Adhesive (**FLXD-SIL-GE-10**) to the inside bottom surfaces of the Mounting Clips, as shown.

Note: If installing upside down on ceiling or vertically on wall, apply Silicone Adhesive (**FLXD-SIL-GE-10**) along the inside of Channel to secure TRACE™ Pro to the Channel.

Step 4: Spray Dry Lubricant on a rag and wipe the inside upper surfaces of the mounting clips, as shown, to allow the TRACE™ Pro fixture to slide more easily into the mounting clip. We recommend using a dry spray lubricant, such as 3M Spray Lubricant or WD-40 Specialist* for all TRACE™ Pro installations to insure the luminaire fits into the channel without damage.

***WARNING!** Risk of Product Damage.
Regular WD40 490002 will stress craze, crack or swell the TRACE™ Pro Silicone covering. Do not use!

Step 5: TRACE™ Pro must be installed with two people. One to press the luminaire into the channel and the other to hold the spool and unroll it while keeping the TRACE™ Pro flex body straight.

Step 6: Press TRACE™ Pro into the Mounting Clip carefully and gradually, without excessive bending or damage will result.

WARNING! Risk of Product Damage.
Do not hammer or pound the luminaire into the channel. Once inserted, do not pull or yank on the fixture. TRACE™ Pro will be damaged unless it is handled carefully.

Step 7: Connect to power.

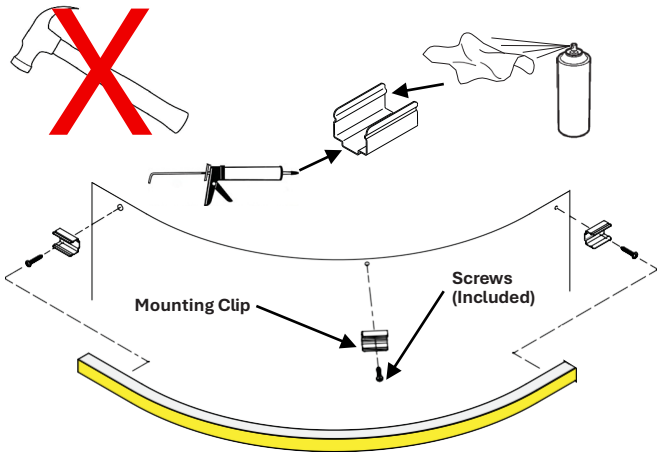

TRACE™ Pro Vertical

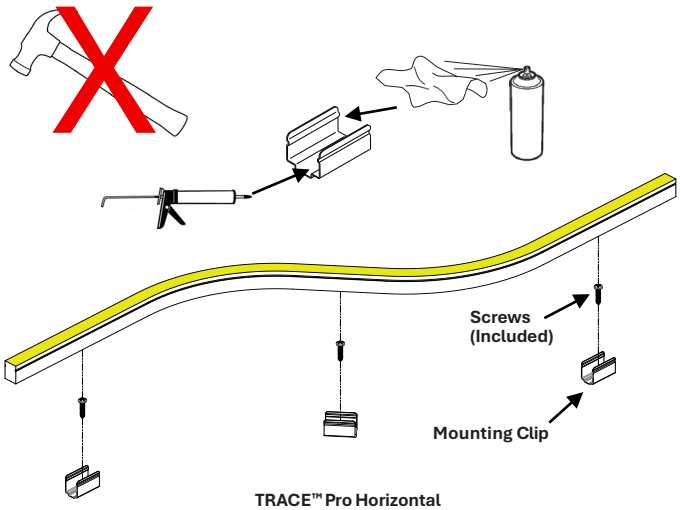

TRACE™ Pro Horizontal

Bending Limitations

WARNING! Risk of Product Damage.
TRACE™ Pro can only be bent in the direction that does not twist the Tape Light.

Copyright © 2021 Tivoli 09.29.2021

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

TRACE™ Pro Mounting: Dual-Bend Notched Channel

Install TRACE™ Pro in Dual-Bend Notched Channel

Applicable Mounting:	TRACE™ Pro Horizontal	TRACE™ Pro Vertical
TRCEPR-SLV-NCHAN-4	✓	✓

Note: Minimum bending diameter for the notched channel is 11". However, the minimum bending diameter for TRACE™ Pro is 7.87".

Step 1: Determine Channel mounting Location.

Step 2: Drill a hole 3" from each end of the Channel and at every 18"-24" spacing along length of Channel.

Step 3: Position the Notched Channel and mount with screws (by others).

Step 4: Lay a bead of Silicone Adhesive (**FLXD-SIL-GE-10**) to the inside bottom surface of the notched mounting channel, as shown.

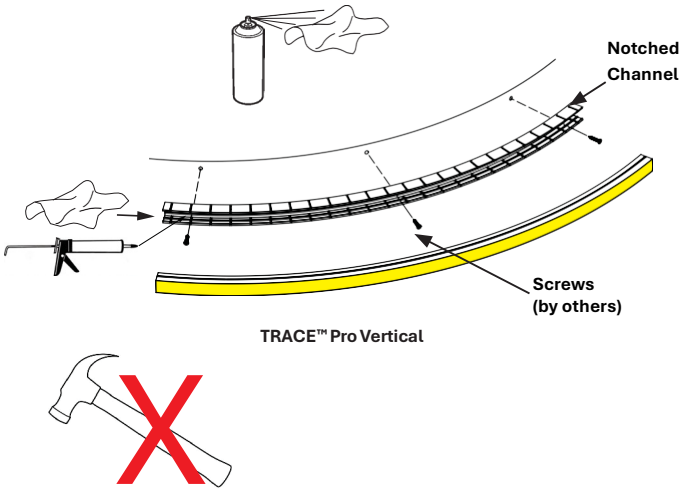

TRACE™ Pro Vertical

Note: If installing upside down on ceiling or vertically on wall, apply Silicone Adhesive (**FLXD-SIL-GE-10**) along the inside of Channel to secure TRACE™ Pro to the Channel.

Step 5: Spray dry lubricant on a rag and wipe along the inside upper surfaces of the extrusion. We recommend using a dry spray lubricant, such as 3M Spray Lubricant or WD-40 Specialist* for all TRACE™ Pro installations to insure the luminaire fits into the channel without damage.

***WARNING!** Risk of Product Damage.
Regular WD40 490002 will stress craze, crack or swell the TRACE™ Pro Silicone covering. Do not use!

Step 6: Start by orienting the TRACE™ Pro with the Lens facing away from the Channel, as shown.

Step 7: TRACE™ Pro must be installed with two people. One to press the luminaire into the channel and the other to hold the spool and unroll it while keeping the TRACE™ Pro flex body straight.

Step 8: Insert the TRACE™ Pro body into the Channel one flex section at a time. Start at one end and press it down carefully and gradually, working along the Channel, inserting the TRACE™ Pro body into each section until the entire TRACE™ Pro fixture is securely mounted in the channel.

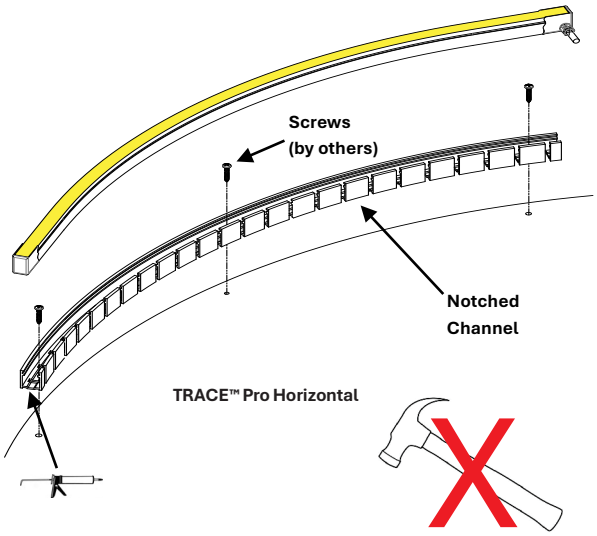

TRACE™ Pro Horizontal

WARNING! Risk of Product Damage.
Do not hammer or pound the luminaire into the channel. Once inserted, do not pull or yank on the fixture. TRACE™ Pro will be damaged unless it is handled carefully.

Step 9: Connect to power.

Bending Limitations

WARNING! Risk of Product Damage.
TRACE™ Pro can only be bent in the direction that does not twist the Tape Light.

Copyright © 2021 Tivoli 09.29.2021

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

TRACE™ Pro Mounting: Flanged Mud-In Channel

Install TRACE™ Pro in Flanged Mud-In Channel

Applicable Mounting:	TRACE™ Pro Horizontal	TRACE™ Pro Vertical
TRCEPR-SLV-SF-CHAN-4	✓	Straight only*
TRCEPR-SLV-DF-CHAN-4	✓	✓

***WARNING:** TRACE™ Pro Vertical only fits into Single Flange Mud-In Channel when it is installed straight and not bent/ not curved.

Note: Minimum bending diameter for the notched channel is 11". However, the minimum bending diameter for TRACE™ Pro is 7.87".



Figure A: Can either screw through the side flange or through back of channel (Screws by others)

Step 1: Determine Channel mounting Location.

Step 2: Cut a 0.76" wide slot in length and shape desired for the channel to fit into.

Step 3: Position the Mud-In Channel and attach with screws (by others). Can be screwed either through back of channel or through holes in flange (See Figure A).

Step 4: Apply Mud over flanges and paint when mud has dried.

Step 5: Lay a bead of Silicone Adhesive (**FLXD-SIL-GE-10**) to the inside bottom surface of the mounting channel, as shown.

Note: If installing upside down on ceiling or vertically on wall, apply Silicone Adhesive (**FLXD-SIL-GE-10**) along the inside of Channel to secure TRACE™ Pro to the Channel.

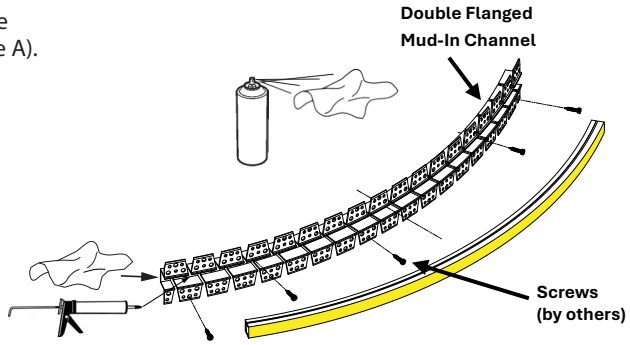

Double Flanged Mud-In Channel (TRACE™ Pro Vertical Shown)

Step 6: Spray dry lubricant on a rag and wipe along the inside upper surfaces of the extrusion. We recommend using a dry spray lubricant, such as 3M Spray Lubricant or WD-40 Specialist for all TRACE™ Pro installations to insure the luminaire fits into the channel without damage.



***WARNING!** Risk of Product Damage.
Regular WD40 490002 will stress craze, crack or swell the TRACE™ Pro Silicone covering. Do not use!

Step 7: Start by orienting the TRACE™ Pro with the Lens facing away from the Channel, as shown.

Step 8: TRACE™ Pro must be installed with two people. One to press the luminaire into the channel and the other to hold the spool and unroll it while keeping the TRACE™ Pro body straight.

Step 9: Insert the TRACE™ Pro body into the Channel one section at a time. Start at one end and press it down carefully and gradually, working along the Channel, inserting the TRACE™ Pro body into each section until the entire TRACE™ Pro fixture is securely mounted in the channel.

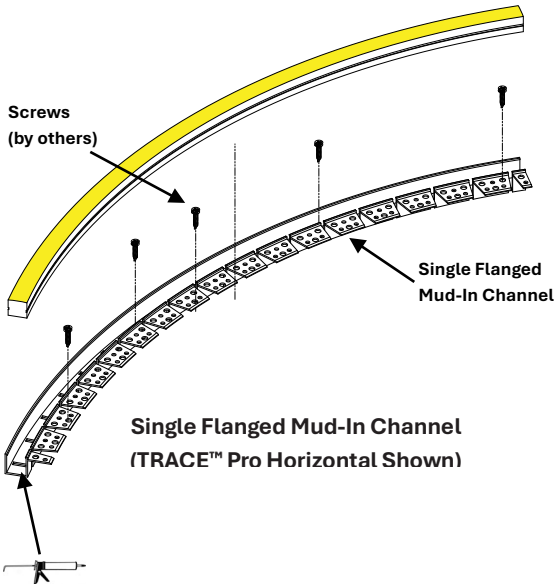

Single Flanged Mud-In Channel (TRACE™ Pro Horizontal Shown)

WARNING! Risk of Product Damage.
Do not hammer or pound the luminaire into the channel. Once inserted, do not pull or yank on the fixture. TRACE™ Pro will be damaged unless it is handled carefully.

Step 10: Connect to power.

Bending Limitations

WARNING! Risk of Product Damage.
TRACE™ Pro can only be bent in the direction that does not twist the Tape Light.

Copyright © 2021 Tivoli 09.29.2021

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

TRACE™ Pro Mounting: Aluminum Straight Channel

Aluminum Straight Channel for TRACE™ Pro Installation

Applicable Mounting:	TRACE™ Pro Horizontal	TRACE™ Pro Vertical
TRCEPR-SLV-CHAN-4	✓	✓

Step 1: Prepare Straight Channel for installation cutting it to the correct length, and by drilling screw holes 3" from each end and additional holes approximately every 18" along the channel.

Step 2: Place Channel on the mounting surface and mark the hole locations.

Step 3: Remove the Channel and drill pilot holes at all hole locations.

Step 4: Place the Channel into position and secure with screws (not included).

Note: Screws should be appropriate for the mounting location. (i.e.: wood screws for wood, etc.)

Step 5: Lay a bead of Silicone Adhesive (**FLXD-SIL-GE-10**) to the inside bottom surface of the straight channel, as shown.

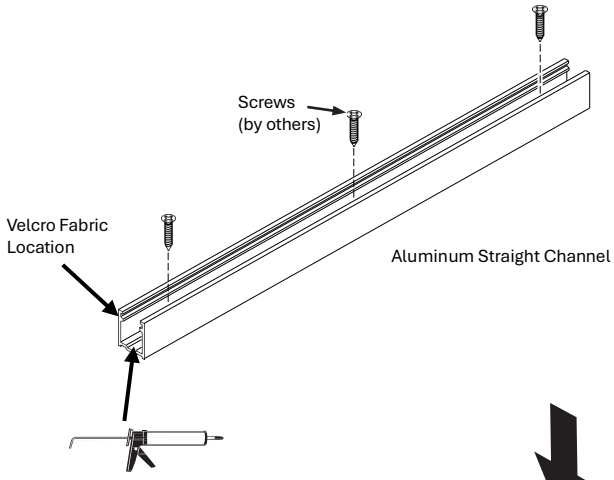

Note: If installing upside down on ceiling or vertically on wall, apply Silicone Adhesive (**FLXD-SIL-GE-10**) along the inside of Channel to secure TRACE™ Pro to the Channel.

Step 6: TRACE™ Pro must be installed with two people. One to press the luminaire into the channel and the other to hold the spool and unroll it while keeping the TRACE™ Pro flex body straight.

Note: Aluminum Straight Channel has "Velcro" fabric in the walls which holds the TRACE™ Pro inside the channel. When cutting in field, ensure fabric remains in the channel.

***WARNING!** Risk of Product Damage.
Lubricant is not needed for this product. Using Lubricant will negate the effectiveness of "Velcro" material.

Step 7: Start by orienting the TRACE™ Pro with the Lens facing away from the Channel, as shown.

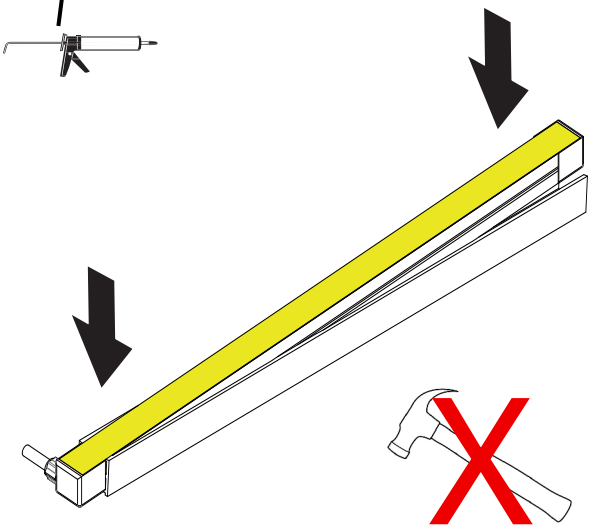

Step 8: IMPORTANT! Insert the TRACE™ Pro body into the Channel. Start at one end and press it down carefully and gradually, working along the Channel, inserting the TRACE™ Pro body along the channel until the entire TRACE™ Pro fixture is securely mounted in the Channel.

WARNING! Risk of Product Damage.
Do not hammer or pound the luminaire into the channel. Once inserted, do not pull or yank on the fixture. TRACE™ Pro will be damaged unless it is handled carefully.

Step 9: Connect to power.

Bending Limitations

WARNING! Risk of Product Damage.
TRACE™ Pro can only be bent in the direction that does not twist the Tape Light.

Copyright © 2021 Tivoli 09.29.2021

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

TRACE™ Pro Mounting: Polycarbonate Straight Channel

Polycarbonate Straight Channel for TRACE™ Pro Installation

Applicable Mounting:	TRACE™ Pro Horizontal	TRACE™ Pro Vertical
TRCEPR-CLR-PCCHAN-01-4	✓	✓
TRCEPR-CLR-PCCHAN-02-4	✓	✓

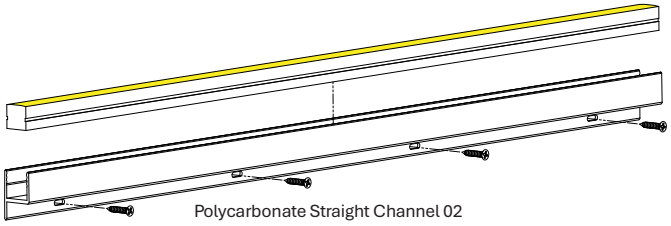

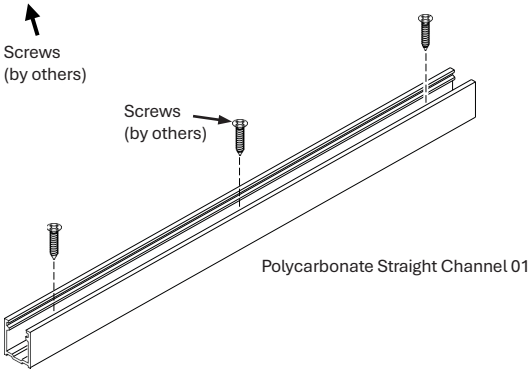

Note: Polycarbonate Straight Channel already has holes, add as needed.

Step 1: Place Channel on the mounting surface and mark the hole locations.

Step 2: Remove the Channel and drill pilot holes at all hole locations.

Step 3: Place the Channel into position and secure with screws (not included).

Note: Screws should be appropriate for the mounting location. (i.e.: wood screws for wood, etc.)

Step 4: Lay a bead of Silicone Adhesive (**FLXD-SIL-GE-10**) to the inside bottom surface of the straight channel, as shown.

Note: If installing upside down on ceiling or vertically on wall, apply Silicone Adhesive (**FLXD-SIL-GE-10**) along the inside of Channel to secure TRACE™ Pro to the Channel.

Step 5: Spray dry lubricant on a rag and wipe along the inside upper surfaces of the extrusion. We recommend using a dry spray lubricant, such as 3M Spray Lubricant or WD-40 Specialist* for all TRACE™ Pro installations to insure the luminaire fits into the channel without damage.

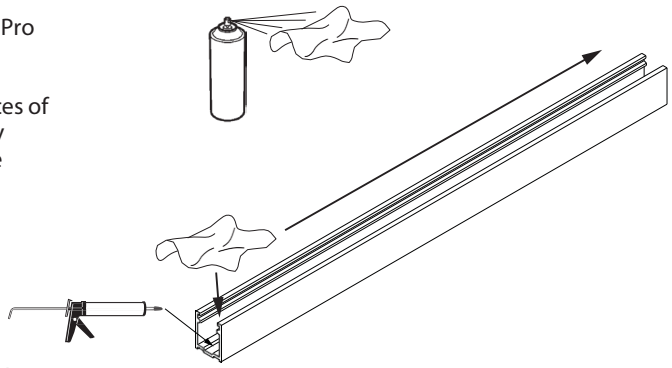

***WARNING!** Risk of Product Damage.
Regular WD40 490002 will stress craze, crack or swell the TRACE™ Pro Silicone covering. Do not use!

Step 6: TRACE™ Pro must be installed with two people. One to press the luminaire into the channel and the other to hold the spool and unroll it while keeping the TRACE™ Pro flex body straight.

Step 7: Start by orienting the TRACE™ Pro with the Lens facing away from the Channel, as shown.

Step 8: IMPORTANT! Insert the TRACE™ Pro body into the Channel. Start at one end and press it down carefully and gradually, working along the Channel, inserting the TRACE™ Pro body along the channel until the entire TRACE™ Pro fixture is securely mounted in the Channel.

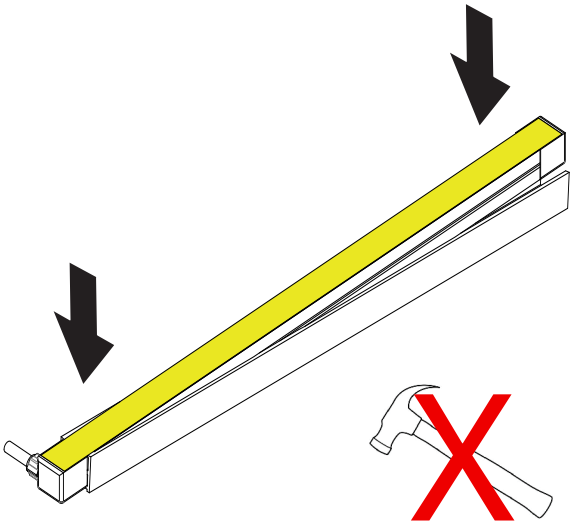

WARNING! Risk of Product Damage.
Do not hammer or pound the luminaire into the channel. Once inserted, do not pull or yank on the fixture. TRACE™ Pro will be damaged unless it is handled carefully.

Step 9: Connect to power.

Bending Limitations

WARNING! Risk of Product Damage.
TRACE™ Pro can only be bent in the direction that does not twist the Tape Light.

Copyright © 2021 Tivoli 09.29.2021

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

TRACE™ Pro Mounting: Orientation

Product Specification Guide

TRACE™ PRO MODEL	OUTPUT	POWER CONSUMPTION	MAX RUN LENGTH	CUT INCREMENTS
Static Louver Static	Low	1.5W	58′	2″
	Standard	3W	29′	
	High	4.5W	19′	
Static (PINK ONLY) Louver Static (PINK ONLY)	Low	1.5W	53′	
	Standard	3W	29′	
	High	4.5W	17′	
Dynamic White	Low	1.5W	40.5′	3″
	Standard	3W	28.8′	
	High	4.5W	18.9′	
RGB	Low	1.5W	39.6′	
	Standard	3W	27.9′	
	High	4.5W	18.9′	
RGBW	Low	1.5W	35.1′	
	Standard	3W	24.3′	
	High	4.5W	18.9′	
Pixel White Pixel RGBW	Low	1.5W	40.5′	5″
	Standard	3W	26.1′	
	High	4.5W	18.9′	

MOUNTING TYPE	PRODUCT	TRACE™ PRO HORIZONTAL	TRACE™ PRO VERTICAL
Clips	TRCEPR-XXX-MTCLIPS	✓	✓
	TRCEPR-CLR-PCCLIPS	✓	✓
Notched	TRCEPR-SLV-NCHAN-4	✓	✓
Mud-In	TRCEPR-SLV-SF-CHAN-4	✓	Straight only*
	TRCEPR-SLV-DF-CHAN-4	✓	✓
Straight	TRCEPR-SLV-CHAN-4	✓	✓
	TRCEPR-CLR-PCCHAN-01-4	✓	✓
	TRCEPR-CLR-PCCHAN-02-4	✓	✓

***WARNING:** TRACE™ Pro Vertical only fits into Single Flange Mud-In Channel when Channel is installed straight and not bent/ not curved.

Copyright © 2021 Tivoli 09.29.2021

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

TRACE™ Pro: Field Cut and Screwless End Cap Instructions (Optional)

Applicable Products:	TRACE™ Pro Horizontal	TRACE™ Pro Vertical
TRCEPR-NS-EC	✓	✓

CUT LENGTH TABLE	
TRACE™ PRO VERSION	CUT INCREMENTS (X)
Static	2 in
Louver Static	2 in
Dynamic White	3 in
RGB	3 in
RGBW	3 in
Pixel White	5 in
Pixel RGBW	5 in

Note: End Cap does not fit inside any of the Mounting Channels. Please cut the TRACE™ Pro longer or the Mounting Channel shorter to account for this.

Step 1: Ensure that the TRACE™ Pro is disconnected from power.

Step 2: Measure and make a clean 90 degree cut at the desired length using the TRACE™ scissors (TRCE-SCSOR). There are marked locations at every cut increment every X inches.

Note: Before making the final cut, it is highly recommended to make a test cut at a longer length and verify that the fixture turns on. Then, disconnect it and make the final cut.

Step 3: Insert the dead-end side of TRACE™ Pro into End Cap.

Step 4: Place Seal over dead-end inside End Cap.

Step 5: Place Alignment Spacer on side of End Cap.

Step 6: Insert the Dead-End Connector into the End Cap. (Spacer will leave a gap between Dead-End Connector and End Cap.)

Step 7: Insert the lower locking pin.

Step 8: Remove Alignment Spacer (No longer needed).

Step 9: Insert upper locking pin to secure the Trace fixture. (Upper Locking Pin will tighten the gap left from Alignment Spacer).

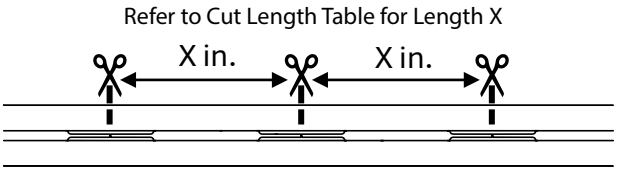

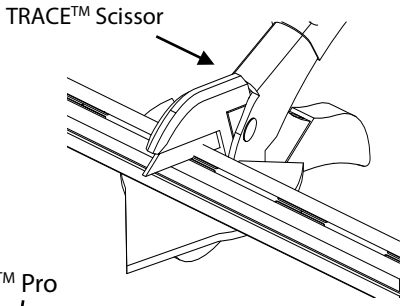

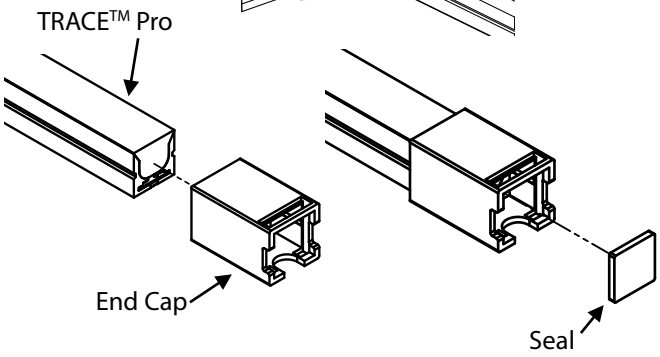

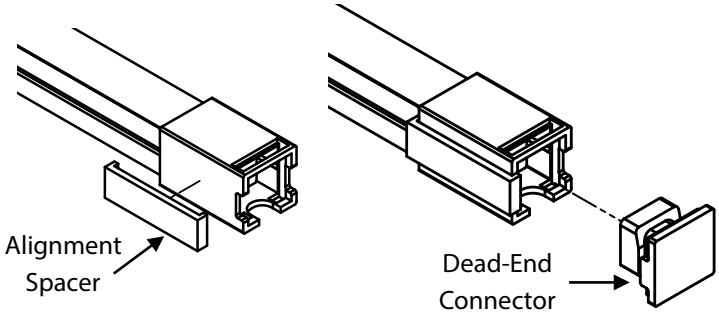

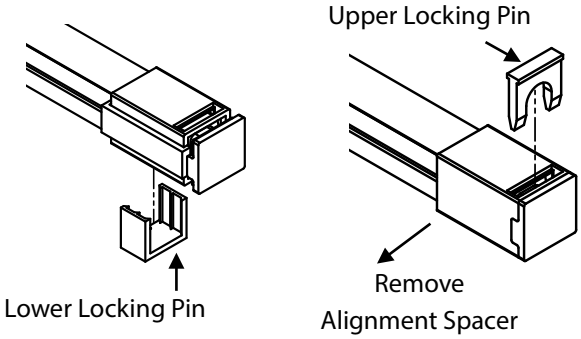

Copyright © 2021 Tivoli 09.29.2021

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Power Supply with 0-10V Sample Wiring Diagram

There are many possible options for dimming TRACE™ Pro. See the Specification Sheet for more information. The following wiring diagram is for reference only. Please refer to the Installation Instruction for the Power Supply you choose for detailed wiring instructions.

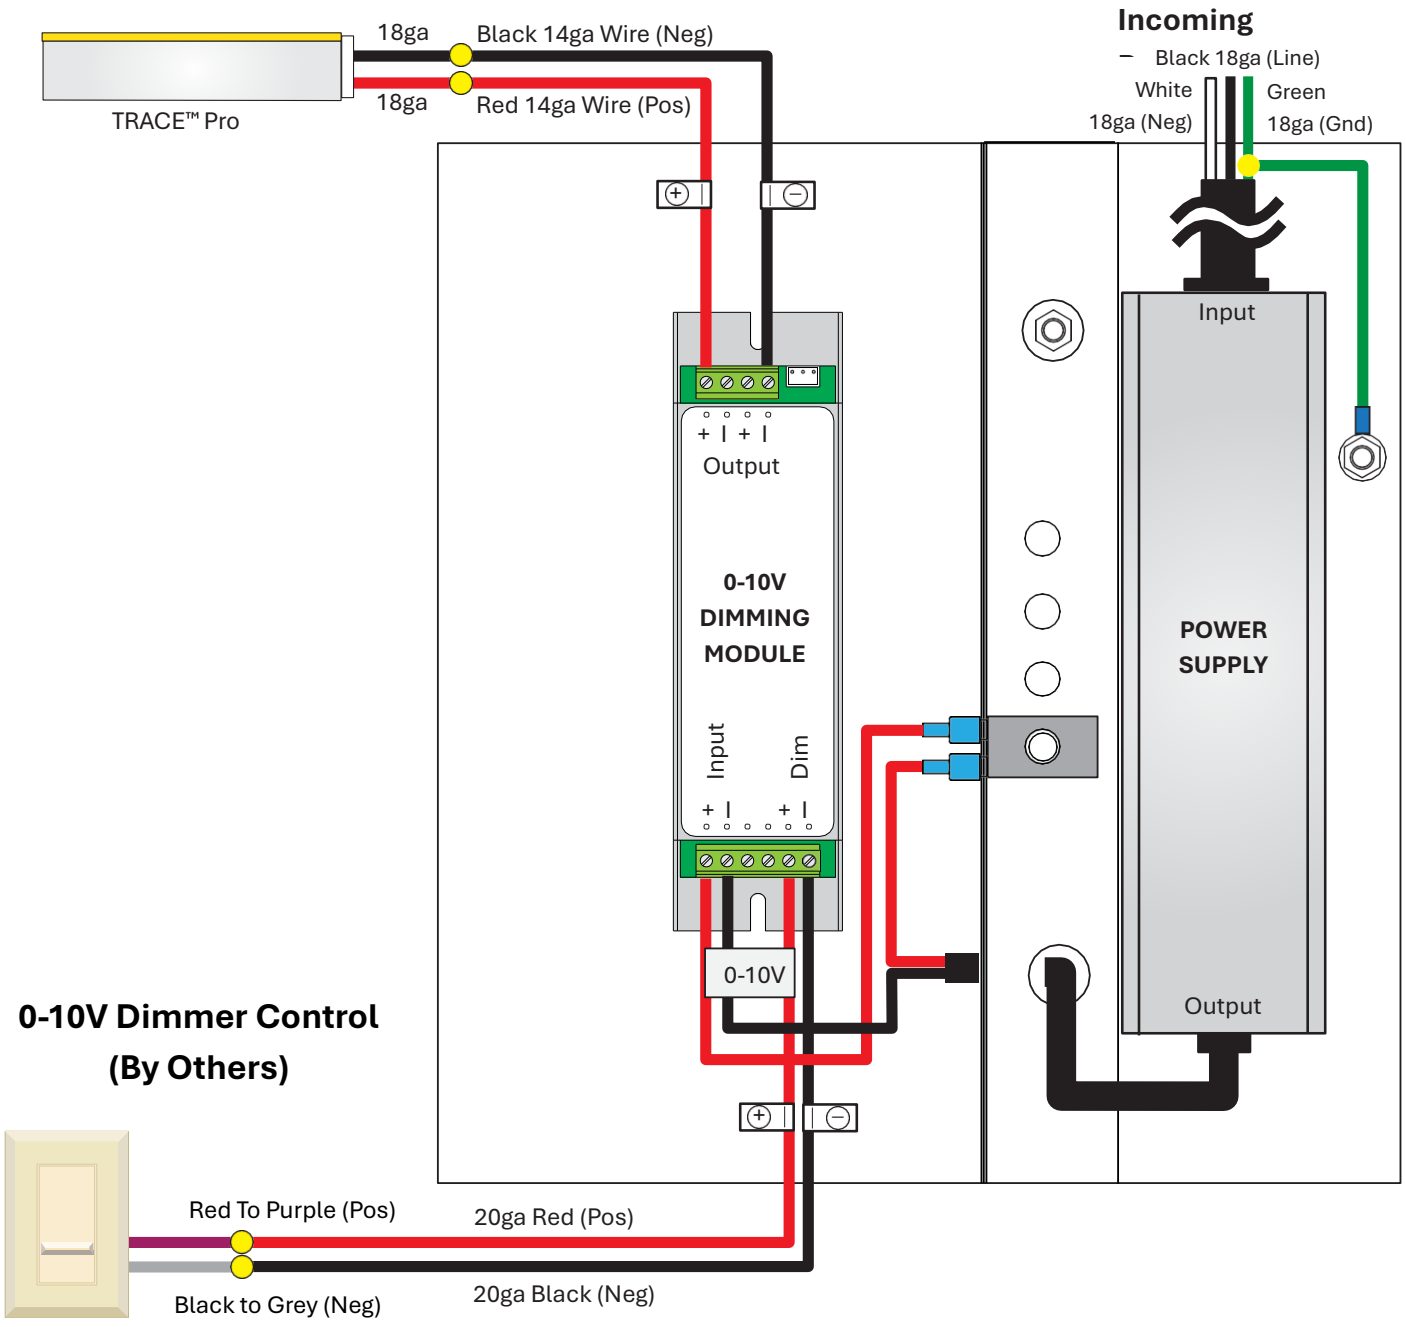

Copyright © 2021 Tivoli 09.29.2021

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

TRACE™ Pro RGB Basic Wiring Diagram

Electrical Connections for TRACE™ Pro RGB

Step 1: Turn power off before beginning electrical installation.

Note: Contacting hot wires against the TRACE™ Pro leads may damage the product and void the warranty.

Step 2: Connect TRACE™ Pro lead wires to RGB-Sub-Controller, or if using our ADUL-DIN series transformers, connect to pre-wired connectors which are found inside the power supply box. Refer to diagram below. Make sure each lead wire is connected to the correct terminal, as follows:

TRACE™ PRO PAD DESIGNATION	LEAD WIRE COLOR	SUB-CONTROLLER TERMINAL OR ADUL-DIN CONNECTOR WIRE COLOR
+	Black	Black (+)
B	Blue	Blue
R	Red	Red
G	Green	Green
	White	Not used for RGB

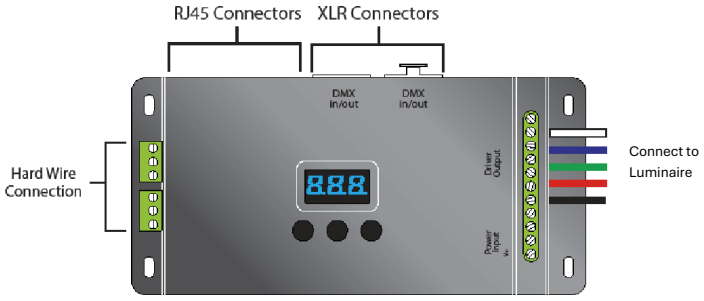

Step 3: Connect to a listed Class 2, 24V DC transformer only. See list of approved transformers.

Step 4: Optionally, TRACE™ Pro RGB may be dimmed using an MLV or ELV dimmer that is suitable for the power supply. Please contact our technical support staff for more information.

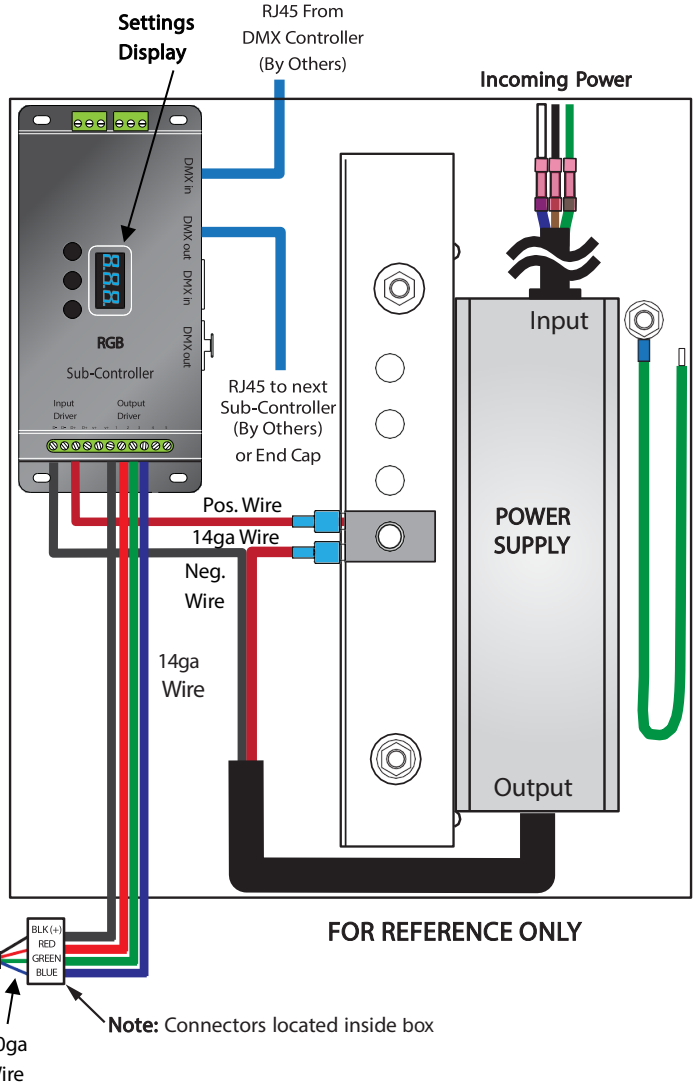

- DMX512 RDM decoder, RDM function can provide the interface between DMX master and decoder.
- OLED Display.
  - Example: DMX decoder's address may be set from DMX master console.
- Multiple kinds of DMX in/out ports: RJ 45, XLR, normal screws.
- Total 5 PWM output channels, common anode. DMX channel quantity from 1CH~5CH programmable.
- PWM output resolution ratio 8bit, 16bit settable.
- Output dimming curve gamma value from 0.1 ~ 9.9 settable.
- Programmable Decoding mode.

Safety and Warnings:
- Do not install with power applied to device.
- Do not expose to moisture.

Note: The Installation Instructions for your power supply includes DMX programming instructions.
Note: Please refer to the Installation Instruction for the Power Supply you choose for detailed wiring instructions.

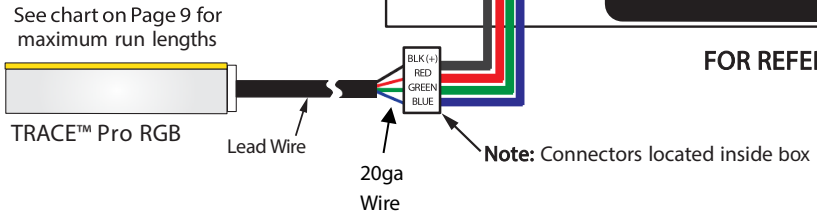

7101004

Copyright © 2021 Tivoli 09.29.2021

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

TRACE™ Pro RGBW Basic Wiring Diagram

Electrical Connections for TRACE™ Pro RGBW

Step 1: Turn power off before beginning electrical installation.

Note: Contacting hot wires against the TRACE™ Pro leads may damage the product and void the warranty.

Step 2: Connect TRACE™ Pro lead wires to RGBW-Sub-Controller, or if using our ADUL-DIN series transformers, connect to pre-wired connectors which are found inside the power supply box. Refer to diagram below. Make sure each lead wire is connected to the correct terminal, as follows:

TRACE™ PRO PAD DESIGNATION	LEAD WIRE COLOR	SUB-CONTROLLER TERMINAL OR ADUL-DIN CONNECTOR WIRE COLOR
+	Black	Black (+)
B	Blue	Blue
R	Red	Red
G	Green	Green
W	White	White

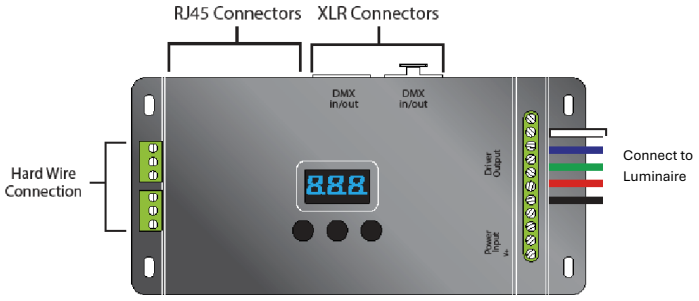

Step 3: Connect to a listed Class 2, 24V DC transformer only. See list of approved transformers.

Step 4: Optionally, TRACE™ Pro RGBW may be dimmed using an MLV or ELV dimmer that is suitable for the power supply. Please contact our technical support staff for more information.

- DMX512 RDM decoder, RDM function can provide the interface between DMX master and decoder.
- OLED Display.
  - Example: DMX decoder's address may be set from DMX master console.
- Multiple kinds of DMX in/out ports: RJ 45, XLR, normal screws.
- Total 5 PWM output channels, common anode. DMX channel quantity from 1CH~5CH programmable.
- PWM output resolution ratio 8bit, 16bit settable.
- Output dimming curve gamma value from 0.1 ~ 9.9 settable.
- Programmable Decoding mode.

Safety and Warnings:
- Do not install with power applied to device.
- Do not expose to moisture.

Note: The Installation Instructions for your power supply includes DMX programming instructions.
Note: Please refer to the Installation Instruction for the power supply you choose for detailed wiring instructions.

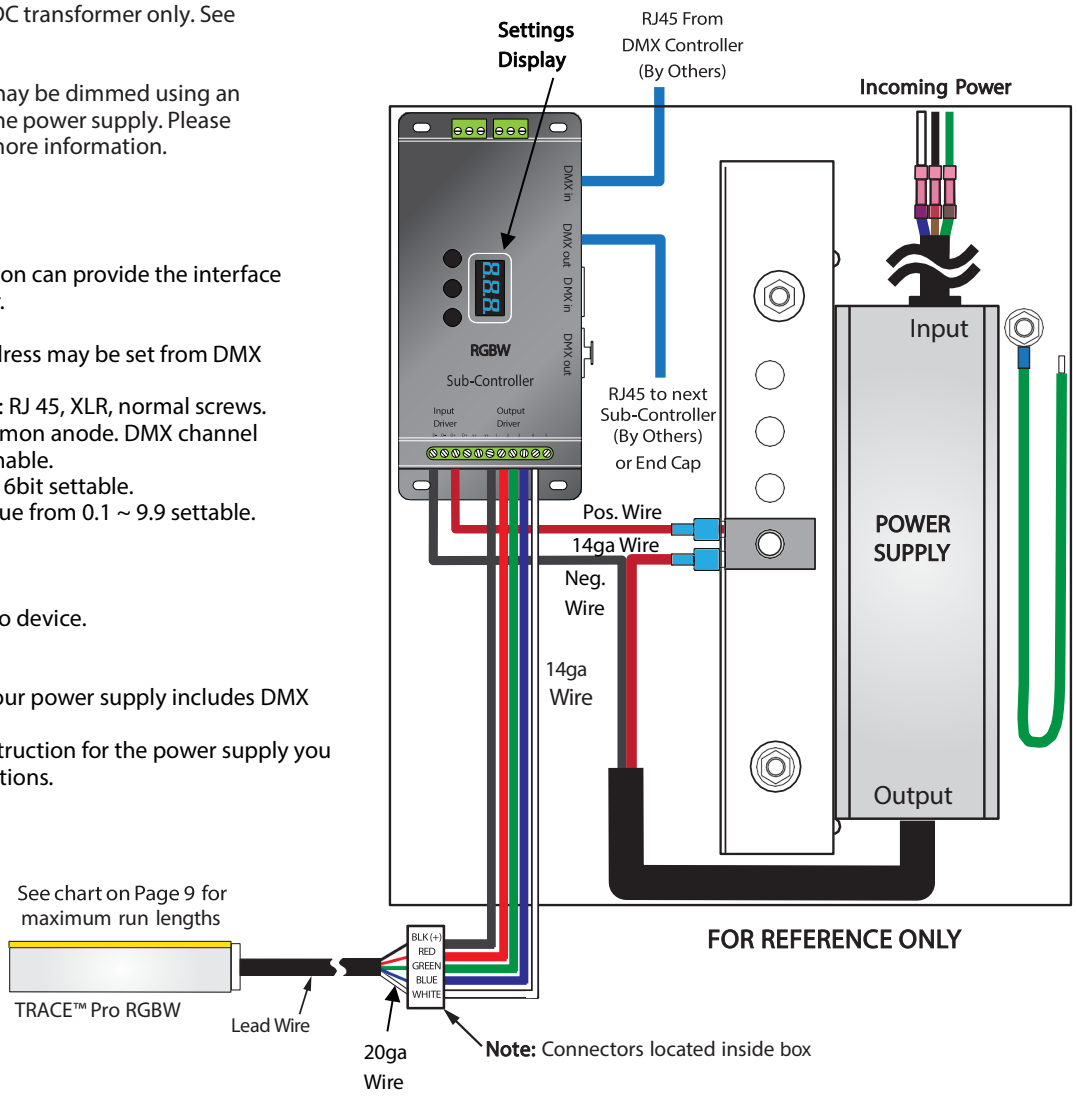

7101004

Copyright © 2021 Tivoli 09.29.2021

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

TRACE™ Pro Dynamic White Basic Wiring Diagram

Elecrical Connections for TRACE™ Pro Dynamic White

Step 1: Turn power off before beginning electrical installation.

Note: Contacting hot wires against the TRACE™ Pro leads may damage the product and void the warranty.

Step 2: Connect TRACE™ Pro lead wires to DMX-Sub-Controller, or if using our ADUL-DIN series transformers, connect to pre-wired connectors which are found inside the power supply box. Refer to diagram below, ADUL-DIN, or ADNM-DIN installation instructions. Make sure each lead wire is connected to the correct terminal, as follows:

TRACE™ PRO PAD DESIGNATION	LEAD WIRE COLOR	SUB-CONTROLLER TERMINAL OR ADUL-DIN CONNECTOR WIRE COLOR
+	Black	Black (+)
Y	Yellow	Red
W	White	Green

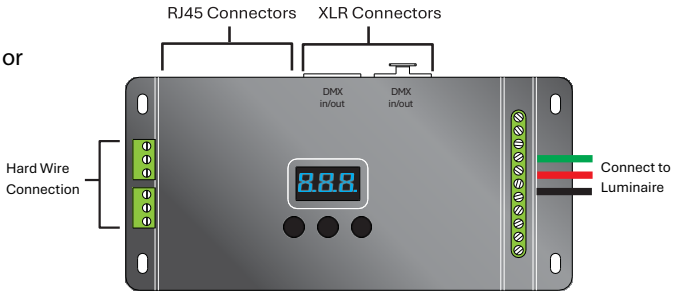

Step 3: Connect to a listed Class 2, 24V DC transformer only. See list of approved transformers.

Step 4: Optionally, TRACE™ Pro Dynamic White may be dimmed using an MLV or ELV dimmer that is suitable for the power supply. Please contact our technical support staff for more information.

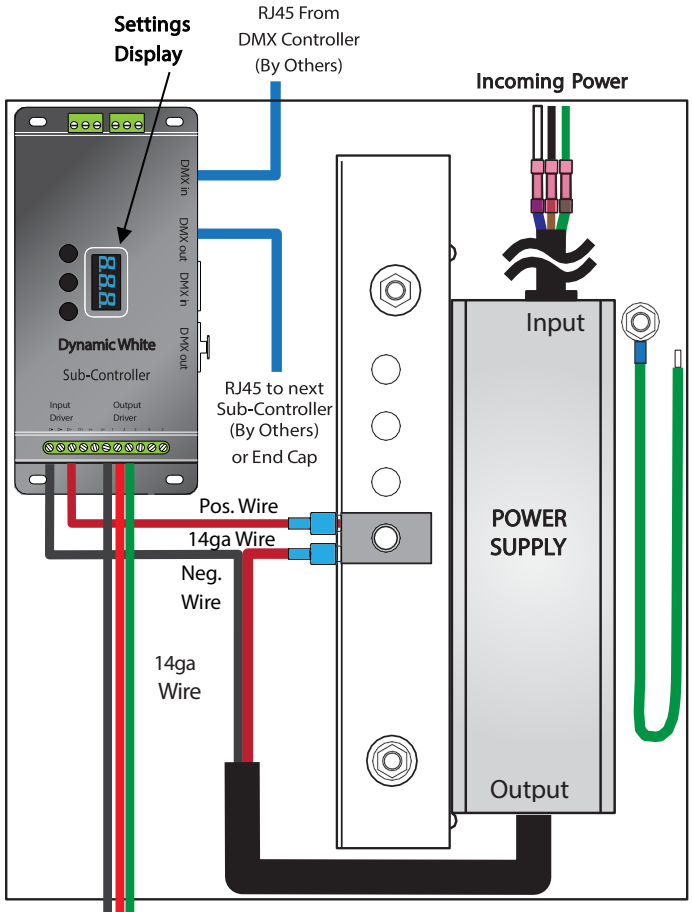

- DMX512 RDM decoder, RDM function can provide the interface between DMX master and decoder.
- OLED Display.
  - Example: DMX decoder's address may be set from DMX master console.
- Multiple kinds of DMX in/out ports: RJ 45, XLR, normal screws.
- Total 5 PWM output channels, common anode. DMX channel quantity from 1CH~5CH programmable.
- PWM output resolution ratio 8bit, 16bit settable.
- Output dimming curve gamma value from 0.1 ~ 9.9 settable.
- Programmable Decoding mode.

Safety and Warnings:
- Do not install with power applied to device.
- Do not expose to moisture.

Note: The Installation Instructions for your power supply includes DMX programming instructions.
Note: Please refer to the Installation Instruction for the Power Supply you choose for detailed wiring instructions.

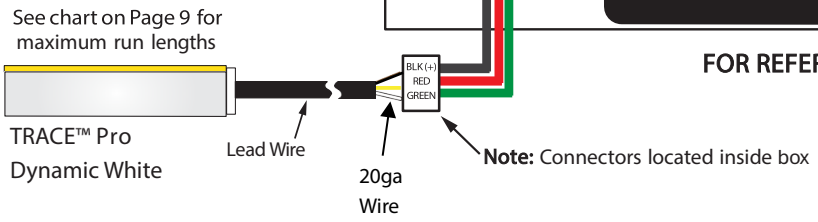

7101004

Copyright © 2021 Tivoli 09.29.2021

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

TRACE™ Pro Pixel White and Pixel RGBW Basic Wiring Diagram

Electrical Connections for TRACE™ Pro Pixel

Step 1: Turn power off before beginning electrical installation.

Step 2: Connect the power input (V+ and GND) to 24V DC power supply.

NOTE: Refer to related power supply specification sheets for more information and other possible configurations.

Step 3: Connect the data input to DMX controller.

PI → PO of DMX Writer
A → DMX+ of DMX Writer
B → DMX- of DMX Writer

TRACE™ PRO PAD DESIGNATION	LEAD WIRE COLOR
V+	Red
GND	Black
PI	Green
A	Blue
B	White

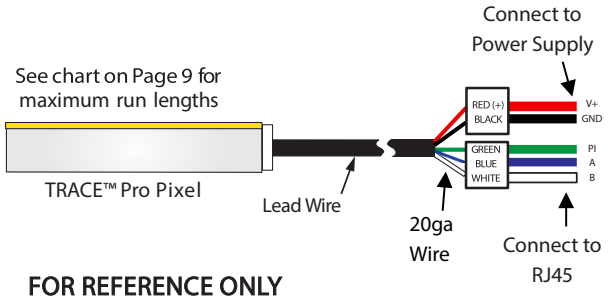

FOR REFERENCE ONLY

Safety and Warnings:
- Do not install with power applied to device.
- Do not expose to moisture.

Note: Refer to the related documents of the selected DMX controller for detailed instructions on installation and proper use.

Note: TRACE™ Pro Pixel White and Pixel RGBW both use 4 channels per pixel.

To write address to the first pixel of the run, use DMX Writer with Control IC # UCS512CL.

Copyright © 2021 Tivoli 09.29.2021

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458