Discontinued
AURORA
FORM AND FUNCTION IN ONE

Ordering Information

Direct | 100V - 277V | CRI | Dimmable

PRODUCT CODE	LED COLOR	SIZE	LIGHT GUIDE SIZE	LIGHT GUIDE	DIMMING OPTION
AROR			SM		01
AROR = AURORA Wall Sconce	30 = 3000K 40 = 4000K 53 = 5300K 65 = 6500K	12 = 12″ 24 = 24″ 36 = 36″ 48 = 48″	SM = Small	01 = DIAMOND 02 = MAZE 03 = SPECTRO 04 = LEVEL CS = Custom Design*	01 = 100V - 277V AC w/ TRIAC (120V dimmer)**

*Custom Design - Contact Factory for MOQ, lead time, proper file submission and art approval.
**Consult Factory for TRIAC Dimmer compatibility options

Available Light Guides

Copyright © 2019 Tivoli 10.14.19

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Dimensions

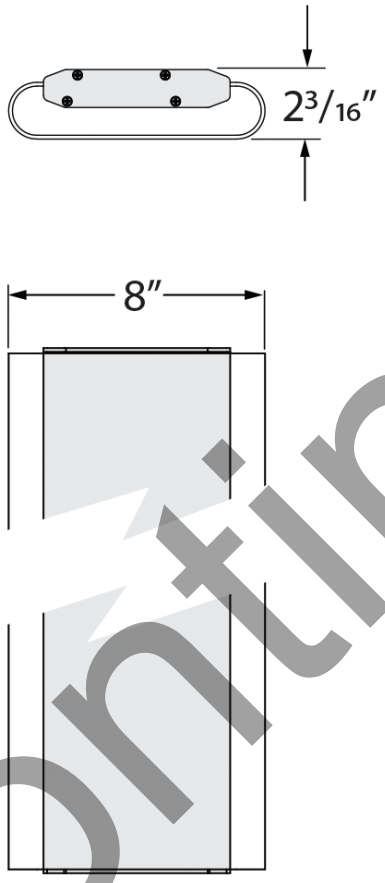

Replacement Parts

AURORA REPLACEMENT LIGHT GUIDE

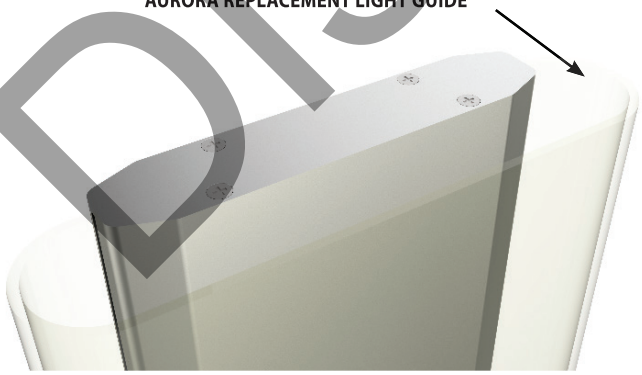

PRODUCT CODE		LIGHT GUIDE		SIZE
ARORLG	-		-	
ARORLG = AURORA Wall Sconce Light Guide		01 = DIAMOND 02 = MAZE 03 = SPECTRO 04 = LEVEL CS = Custom Design*		12 = 12″ 24 = 24″ 36 = 36″ 48 = 48″

*Custom Design - Contact Factory for MOQ, lead time, proper file submission and art approval

Discontinued

Copyright © 2019 Tivoli 10.14.19

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Photometrics

DESIGN: DIAMOND
SIZE: 1'
KELVIN TEMP: 3000K

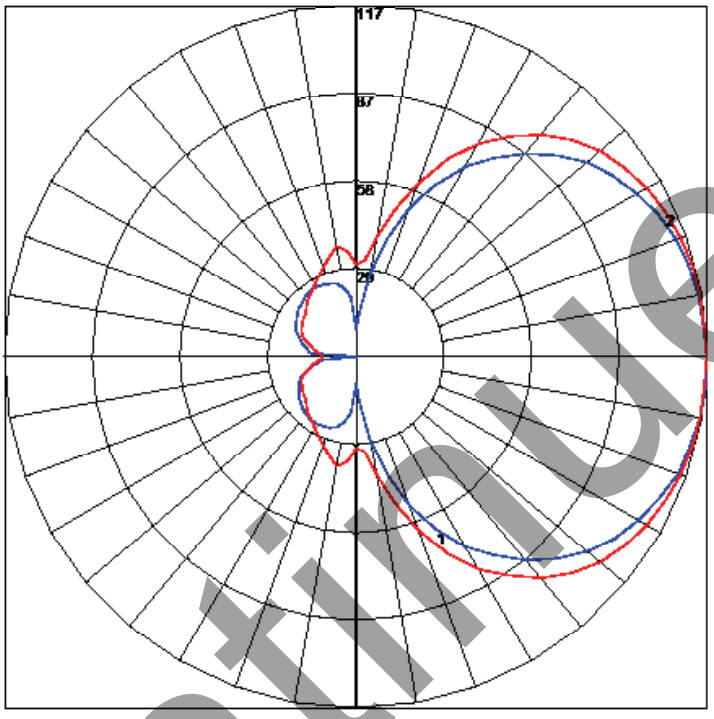

Maximum Candela = 116.54 Located At Horizontal Angle = 0, Vertical Angle = 85
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (85) (Through Max. Cd.)

DESIGN: DIAMOND
SIZE: 4'
KELVIN TEMP: 3000K

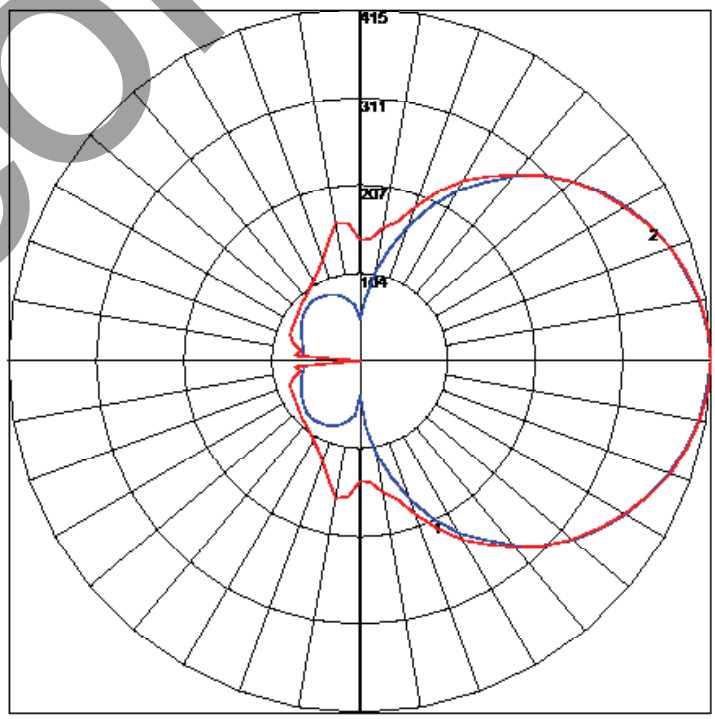

Maximum Candela = 414.89 Located At Horizontal Angle = 0, Vertical Angle = 90
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (90) (Through Max. Cd.)

Discontinued

Copyright © 2019 Tivoli 10.14.19

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Electrical & Photometric Data (Based on 80+ CRI / 3000K / 4′ Model / design Diamond)	
Input Voltage	100V - 277V AC
Dimming Option	TRIAC (120V Dimmer)**
Power Supply	Class 2
Power Consumption	48W
Color Temperature (CCT)	3000K
Lumen Output	2170
Color Rendering Index (CRI)	>80
Efficacy	45.2

Electrical & Photometric Data (Based on 80+ CRI / 3000K / 1′ Model / design Diamond)	
Input Voltage	100V - 277V AC
Dimming Option	TRIAC (120V Dimmer)**
Power Supply	Class 2
Power Consumption	12W
Color Temperature (CCT)	3000K
Lumen Output	661
Color Rendering Index (CRI)	>80
Efficacy	55

Physical				
LED Package	2835			
Finish	Base: Aluminum Light Guide: Acrylic			
Sconce Weight per/size	1′	2′	3′	4′
	2.35 lbs.	4.85 lbs.	6.61 lbs.	9.25 lbs.

Performance	
Certification	ETL Listed
Lumen Maintenance (L70) Hours	60,000
Warranty	5 Years

**Consult Factory for TRIAC Dimmer compatability options

Discontinued

Copyright © 2019 Tivoli 10.14.19

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Recommended Dimmers

DIMMING - MLV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

DIMMING - ELV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W

Discontinued

Copyright © 2019 Tivoli 10.14.19

Tivoli, LLC. reserves the right to modify this specification without prior notice.