Thea
Wall Sconce

Discontinued

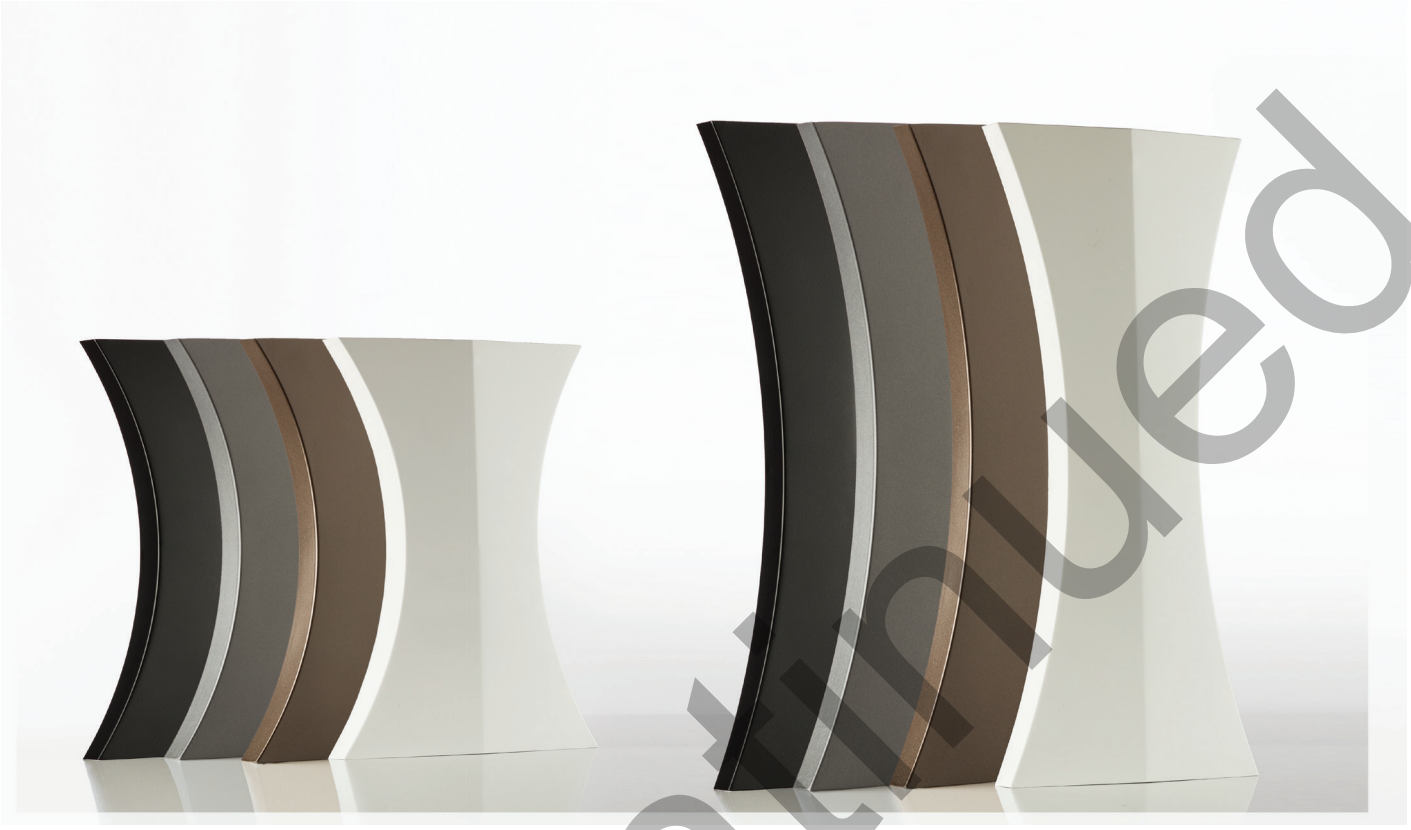

Discontinued

Dimensions

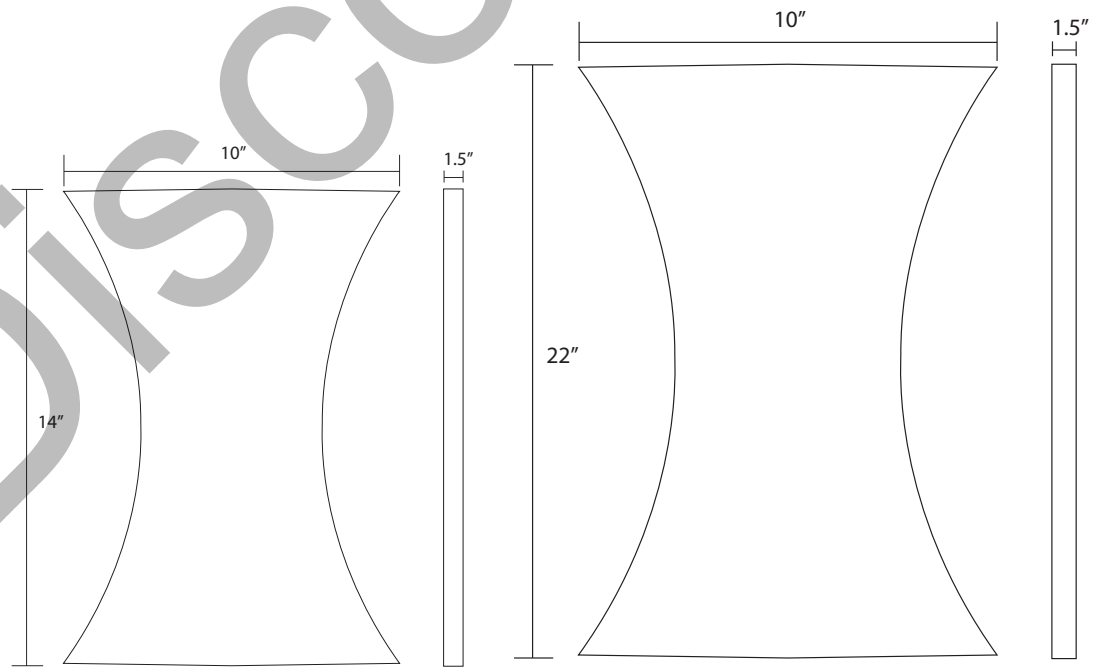

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Direct / Indirect

120V AC
220V AC
120V - 277V AC

90+
CRI

Dimmable

ADA
Compliant

IP54

Features

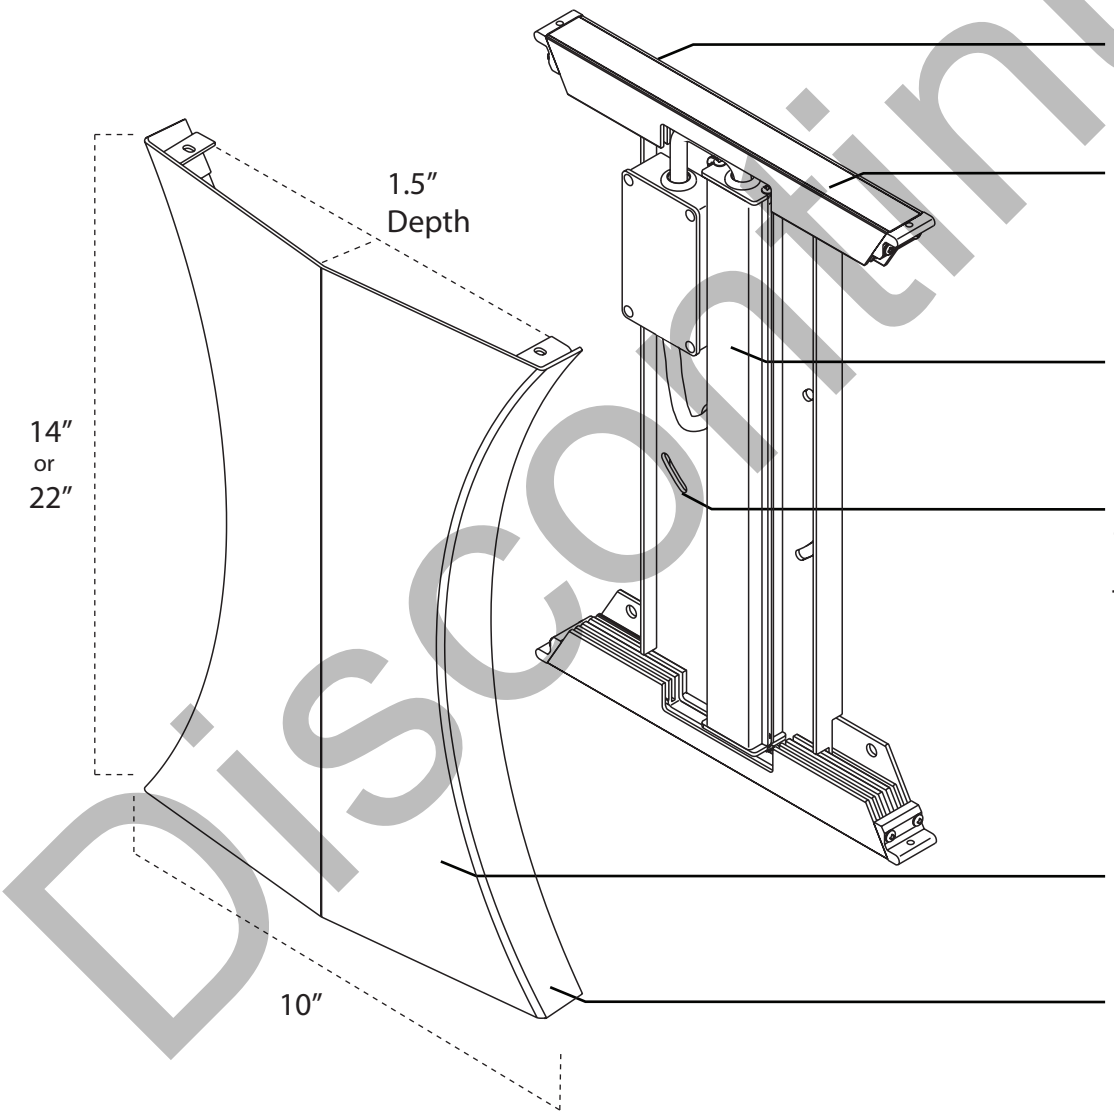

Wipeable, sealed frosted lens

50,000 hour rated life
2700K
3000K

Integral 120V, 220V or 120V - 277V driver with TRIAC or 0-10V dimming

Aluminum bracket mounts to 4″ standard junction box

14″ and 22″ available height

Slim 1.5″ profile
Steel face plate
Powder Coated with a Black, Silver, Bronze, or White finish
**Custom finishes available*

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 06/30/20

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

	2700K	3000K
Delivered Lumens	890 indirect 890 direct	920 indirect 920 direct
Watts	22	22
Lumens Per Watt	81	84

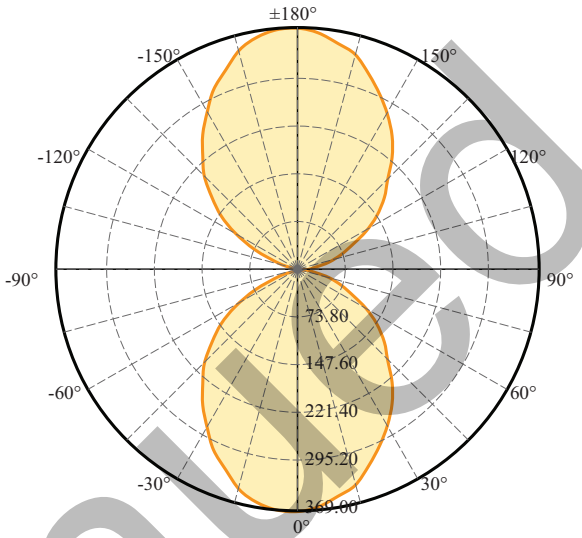

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Project: _____

Type: _____ Qty: _____

Notes:

Product	LED Color		Size		Finish		Voltage and Dimming	
THEA -	_____	-	_____	-	_____	-	_____	
Thea Wall Sconce	**27**	2700K	**SM**	14″	**BK**	Black	**120**	120V AC w/ TRIAC dimming
	30	3000K	**LG**	22″	**BR**	Bronze	**220**	220V AC w/ TRIAC dimming
					GY	Gray	**UNI**	Universal / 0-10 dimming
					WH	White		
					CS	Custom		

Replacement Parts

THEA 14″ REPLACEMENT FACE PLATE
THEA-FACE-BK-SM
Thea replacement face plate, Black, 14″
THEA-FACE-BR-SM
Thea replacement face plate, Bronze, 14″
THEA-FACE-GY-SM
Thea replacement face plate, Gray, 14″
THEA-FACE-WH-SM
Thea replacement face plate, White, 14″
THEA-FACE-CS-SM
Thea replacement face plate, Custom Finish, 14″

THEA 22″ REPLACEMENT FACE PLATE
THEA-FACE-BK-LG
Thea replacement face plate, Black, 22″
THEA-FACE-BR-LG
Thea replacement face plate, Bronze, 22″
THEA-FACE-GY-LG
Thea replacement face plate, Gray, 22″
THEA-FACE-WH-LG
Thea replacement face plate, White, 22″
THEA-FACE-CS-LG
Thea replacement face plate, Custom Finish, 22″

Accessories

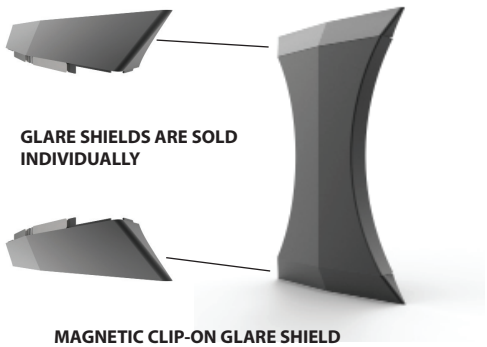

GLARE SHIELDS ARE SOLD INDIVIDUALLY

MAGNETIC CLIP-ON GLARE SHIELD
THEA-GS-BK
Thea magnetic clip-on glare shield, Black
THEA-GS-BR
Thea magnetic clip-on glare shield, Bronze
THEA-GS-GY
Thea magnetic clip-on glare shield, Gray
THEA-GS-WH
Thea magnetic clip-on glare shield, White
THEA-GS-CS
Thea magnetic clip-on glare shield, Custom

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Electrical & Photometric data

Input Voltage	120VAC	220VAC	100-277VAC
Dimming Option	TRIAC	TRIAC	0-10V
Power Consumption	22W Typical / 25W Max.		
Driver	Integral to Fixture		
Color Temperature (CCT)	2700K	3000K	
Lumen Output	1780 lm	1840 lm	
Efficacy	81 lm/W	84 lm/W	
Color Rendering Index (CRI)	92		
R9	50+		

Physical

LED	Samsung 5630 SMD		
Operating Temperature	14°F(-10°C)~104°F(40°C)		
Environment	Indoor Dry Location		
Dimension (WxHxL)	10"(254mm)x 1.5"(38.1mm)x	14"(355.6mm) 22" (558.8mm)	
Finish	Powder coat finish. Standard finish options in White, Black, Silver and Copper. Custom finish options available		
Weight	Fixture Length	14"	22"
	Fascia	1.80 lbs	2.70 lbs
	Base	1.95 lbs	2.20 lbs
	Total	3.75 lbs	4.90 lbs

Mechanical

Mounting	ADA compliant direct wall mount, universal junction box mounting with crossbar and hardware included	
Material	Fascia	0.071" thick Steel
	Base	0.079" thick Aluminum
	Lens	Frosted Glass

Performance

Certification	ETL listed for Dry Location Only
Lumen Maintenance	50,000 hours
Binning Tolerance	±100K
Warranty	5 years

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Recommended Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	24V DC	24V DC	30 mA max. output (sink only)

DIMMING - MLV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

DIMMING - ELV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 06/30/20

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458