




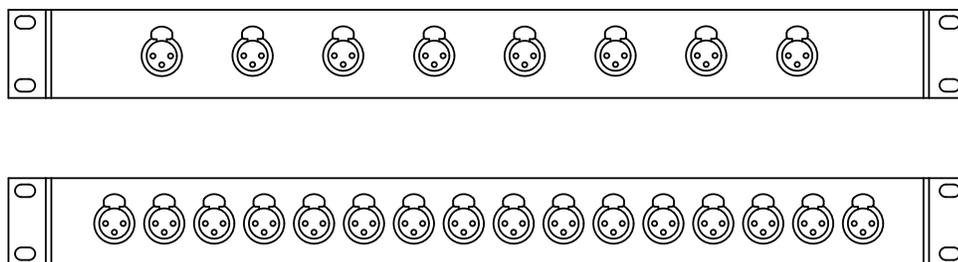

Project: _____ TYPE: _____

- Radiant L16 controller converts Artnet data from ethernet network to DMX512
- 8 universes and 16 universes Radiant Artnet controller available
- Perfect synchronization between each universe
- Pixel mapping and voxel mapping, easy to install
- The device is ready within seconds after start-up. An HTP merge is automatically available for two Art-net sources
- Easy to access and change the device settings through built-in web configuration tool

Dimensions

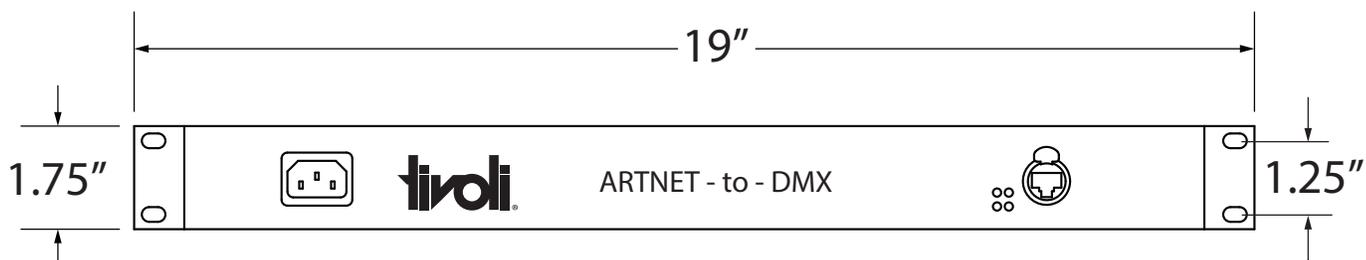



Order Specification Guide

PRODUCT CODE	CONTROL MODE	PIXEL / METER	CHANNELS
ARTNET	L		512
ARTNET = Artnet to DMX Controller	L = Live Mode	8 = 8 Universe 16 = 16 Universe	512

Note: A layout/drawing must accompany each order showing run length and location

Specifications

Electrical	
Input Voltage	12-24V DC
Power Consumption	<2W
Control	
Input Protocol	Artnet
Output Protocol	DMX512
Refresh Rate	40 fps
Default IP	192.168.1.100
Default Subnet	255.255.255.0
DMX Channels	8 port: 4096 channels ; 16 port: 8192 channels
Connection	
Ethernet Ports	RJ45
DMX512 Ports	3-Pin XLR Female
Physical	
Product Dimension	19" L x 5.38" W x 1.73" H
Operating Temperature	-22°F to 140°F
Storage Temperature	-40°F to 176°F
Certification and Testing	
Certification	cETLus, CE, RoHS
Environment	IP20 (Indoor Use Only)

XLR Pin Layout

- Using the web configuration interface to access variety settings and information
- Step 1: Connect Radiant L16 Controller and the computer under the same network
- Step 2: Open web browser and enter the IP address marked on the controller
- Step 3: The web configuration interface will be launched

Super ArtNet 16

Device Settings	
Device Name Settings	
Super ArtNet 16	
General Network Settings	
IP Address	192 . 168 . 1 . 100
Subnet Mask	255 . 255 . 255 . 0
Art-Net Port Address Settings	
Port Out Mode	Single ▼
DMX Physical Port 1	1
DMX Physical Port 2	2
DMX Physical Port 3	3
DMX Physical Port 4	4
DMX Physical Port 5	5
DMX Physical Port 6	6
DMX Physical Port 7	7
DMX Physical Port 8	8
DMX Physical Port 9	9
DMX Physical Port 10	10
DMX Physical Port 11	11
DMX Physical Port 12	12
DMX Physical Port 13	13
DMX Physical Port 14	14
DMX Physical Port 15	15
DMX Physical Port 16	16
Art-Net Sync Settings	
Art-Net 4 ▼	
Configuration Reset	Save
Return	Exit

Super ArtNet 16

Device Information	
Model	Super ArtNet 16
Hardware	1.3.1
Firmware	2.2A
MAC Address	FC:8E:97:E7:E8:C6
IP Address	192.168.1.100
Device Configuration	