



Project: \_\_\_\_\_ TYPE: \_\_\_\_\_

### Features

- Switching electronic power supply
- Constant Voltage
- Universal input voltage: 100-277V AC
- Single and multiple 12V or 24V DC outputs
- NEMA 3R Rain-tight enclosure for wet locations
- 5 year warranty

### Environmental

- MTBF: 100,000 hrs. at full load and 25°C
- Operating temperature: -40°C - +80°C (Full load)
- Storage temperature: -65°C - +90°C
- Heat dissipation: Convection

### Mechanical Specification

- Steel enclosure
- Bracket mount and ½" knockouts for conduit and fittings

### Electrical Data


- Secondary circuit maximum protection for Class 2 circuits: 5A for 12V DC, 4A for 24V DC
- Voltage regulated
- Voltage regulated +/-3%
- Auto overload / short circuit / over voltage protection



## Order Specification Guide

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY	DIMENSION
ADNM Series Class 2	ADNM-60-1-5-12-DTV	INDOOR / OUTDOOR	100-277V AC 50/60 Hz	12V DC	1	60W	5A	10" W X 10" L X 4" D
	ADNM-150-2-5-12-DTV				2	2x60W		12" W X 12" L X 4" D
	ADNM-240-4-5-12-DTV				4	4x60W		16" W X 16" L X 4" D
	ADNM-60-1-5-12-DTVC				1	60W		10" W X 10" L X 4" D
	ADNM-150-2-5-12-DTVC				2	2x60W		12" W X 12" L X 4" D
	ADNM-240-4-5-12-DTVC				4	4x60W		16" W X 16" L X 4" D
	ADNM-120-1-4-24-DTV			24V DC	1	96W	4A	12" W X 12" L X 4" D
	ADNM-240-2-4-24-DTV				2	2x96W		12" W X 12" L X 4" D
	ADNM-320-3-4-24-DTV				3	3x96W		16" W X 16" L X 4" D
	ADNM-120-1-4-24-DTVC				1	96W		12" W X 12" L X 4" D
	ADNM-240-2-4-24-DTVC				2	2x96W		12" W X 12" L X 4" D
	ADNM-320-3-4-24-DTVC				3	3x96W		16" W X 16" L X 4" D

## Wiring Diagram

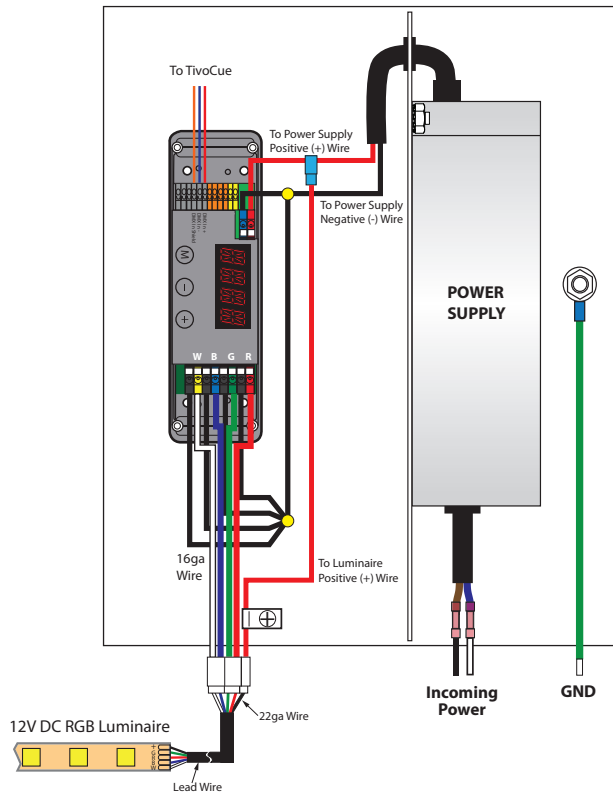


### ADNM-60-1-5-12-DTV/C

#### Outdoor (Nema 3 Rated)

60W / 1 Circuit X 5A / 1 EldoLED Control

Box Size: 10"W X 10"L X 4"D

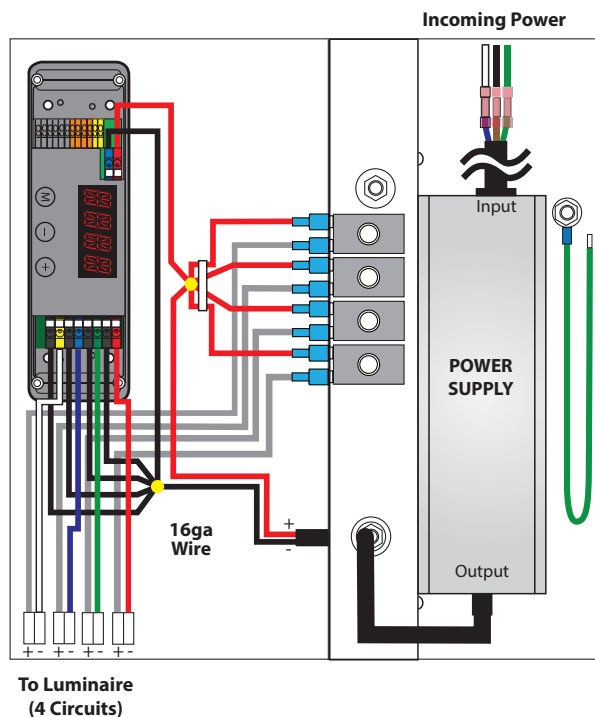


### ADNM-240-4-5-12-DTV/C

#### Outdoor (NEMA 3 Rated)

240W / 4 Circuit X 5A / 1 ELDOLED controls

Box Size: 16"W X 16"L X 4"D

## Wiring Diagram

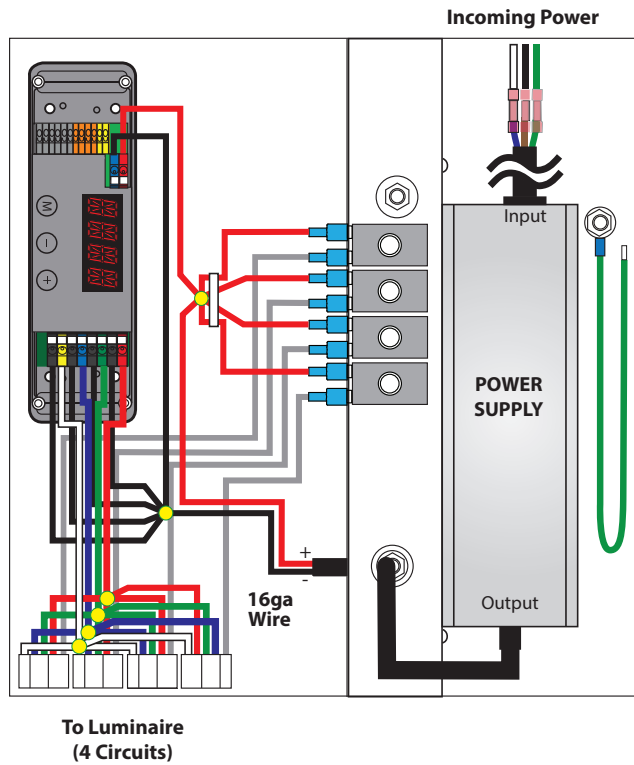

**ADNM-320-3-4-24-DTV/C**  
**Outdoor (NEMA 3 Rated)**  
 320W / 3 Circuit X 4A / 1 ELDOLED controls  
 Box Size: 16"W X 16"L X 4" D


## Connecting and Configuring LINEAR Drive 720D




A Removing the cover



B Removing the strain reliefs

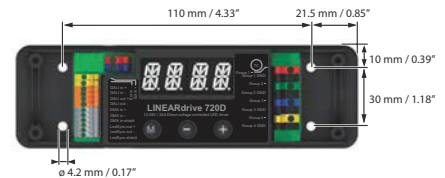

C Mounting the LINEARdrive

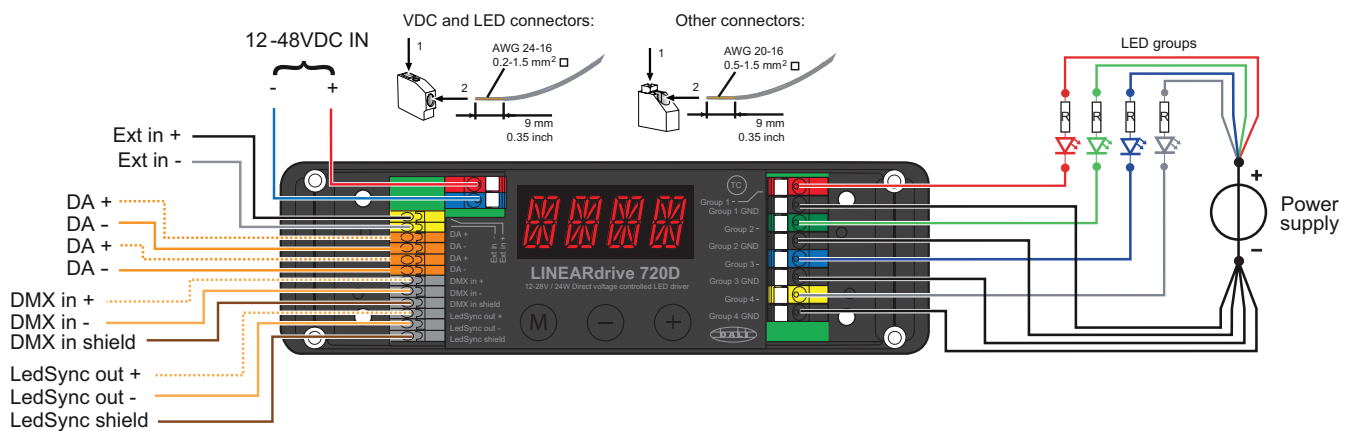

D Making the wire connections



E Fastening the strain reliefs



F Configuring the LINEARdrive



G Replacing the cover

**CAUTION:** The device may only be connected and installed by a qualified electrician. All applicable regulations, legislation and building codes must be observed. Incorrect installation of the device can cause irreparable damage to the device and the connected LEDs.

### **12V - 48V DC IN**

To connect the driver to a 12-48V DC power supply unit (PSU), connect the PSU's positive voltage supply wire to the VDC+ connector and the PSU's negative voltage supply wire to the VDC connector. The driver and LEDs can use the same PSU.

### **EXT In**

You have the possibility to connect an external control device (10  $\Omega$  potentiometer or show selection switch) to the driver's Ext in+ and Ext in- connector. Configure the driver for use with an external control device over the 3-button user interface.

### **DA+ / DA-**

Use these connectors to connect the driver to a DALI network. Always combine a DA+ and a DA- connector for either data in-put or data output.

### **DMX In/LedSync Out**


Use these connectors when the driver is used in a DMX network. For DMX in, connect the network cable's DMX+, DMX- and DMX shielding wire (the in a CAT5 cable) to the DMX in+, DMX in- and DMX in shield orange/white, orange and brown wire in a CAT5 cable) to the DMX in+, DMX in- and DMX in shield connector respectively. For LedSync out, connect the network cable's data+, data and shielding wire to the LedSync out+, LedSync out- and LedSync shield connector respectively.

### **LED groups**


Indicates the location of the connectors for your LED groups. R(ed) represents channel 1, G(reen) represents channel 2, B(lue) represents channel 3 and W(hite) represents channel 4. The default group color allocation can be changed over the 3-button user interface.

## Manual configuration


### 1. Select mode of operation




### 2. Set LED groups

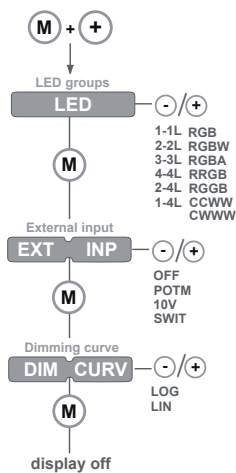


### 3. Standalone operation - Colour\*-

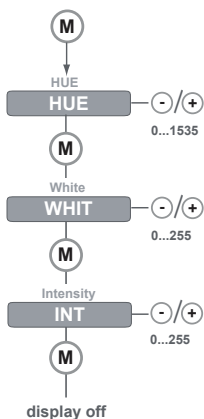

### Standalone operation - Show -

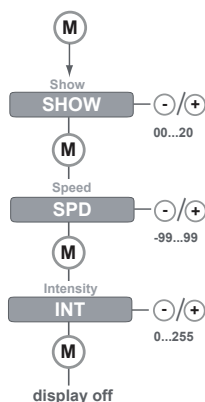


### Networked operation - DMX or DALI -

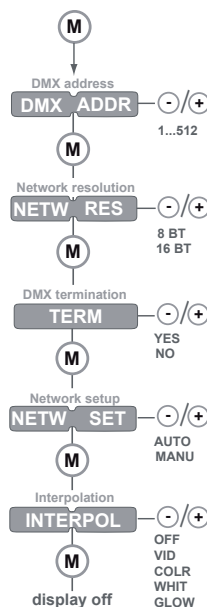


\* The colour menu depends on the LED group settings you have selected in step 2.

## Other features

### Visual test run



### Locking the configuration



### Reset to factory defaults

