




drywall thickness recessed lighting solution

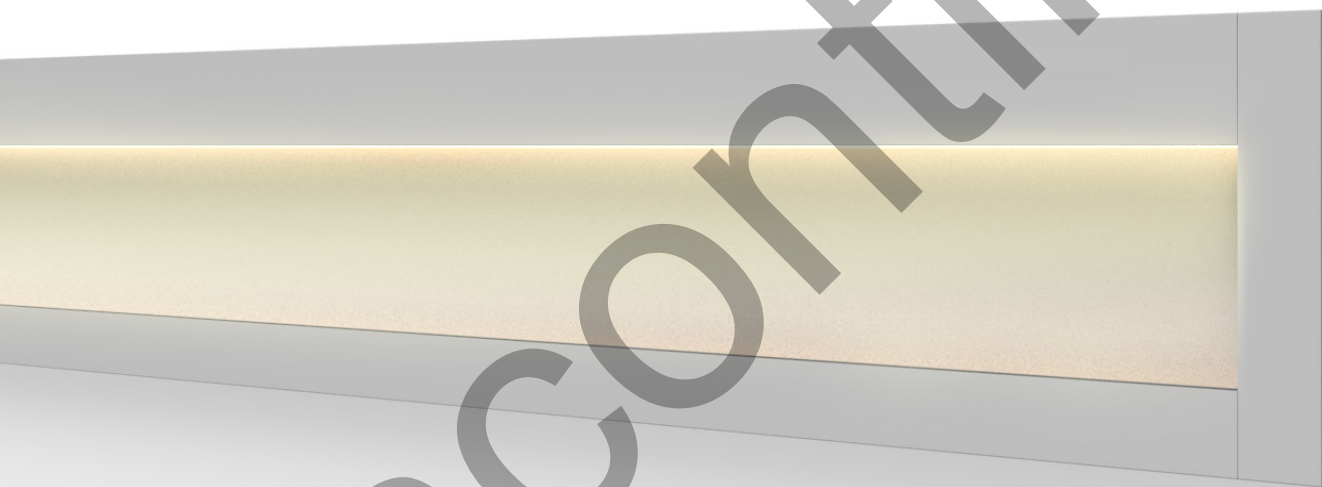


5/8" wide housing for ease of installation in standard 5/8" drywall applications

Frosted polycarbonate lens

Tamperproof snap in reflector

Safe zone for mounting screw

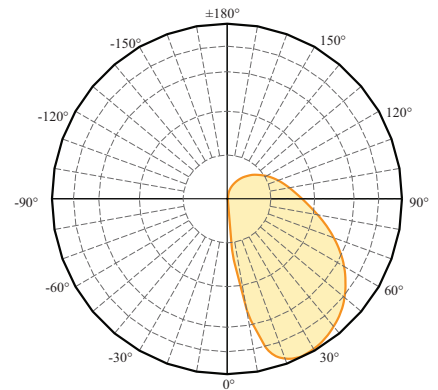

JUNCTION BOX





Mini Junction Box
WALY-JBOX

Use to cover terminal block connections. Terminal Block included; connects Tivotape™ to Power Source. J-Box mounts to stud behind Wally fixture. Use a J-Box at Start of each Tape run and at all corners.

ENDCAPS



Silver Endcap Universal
WALY-EC-SL

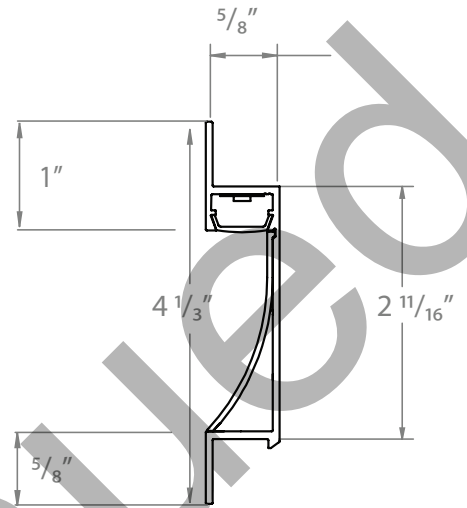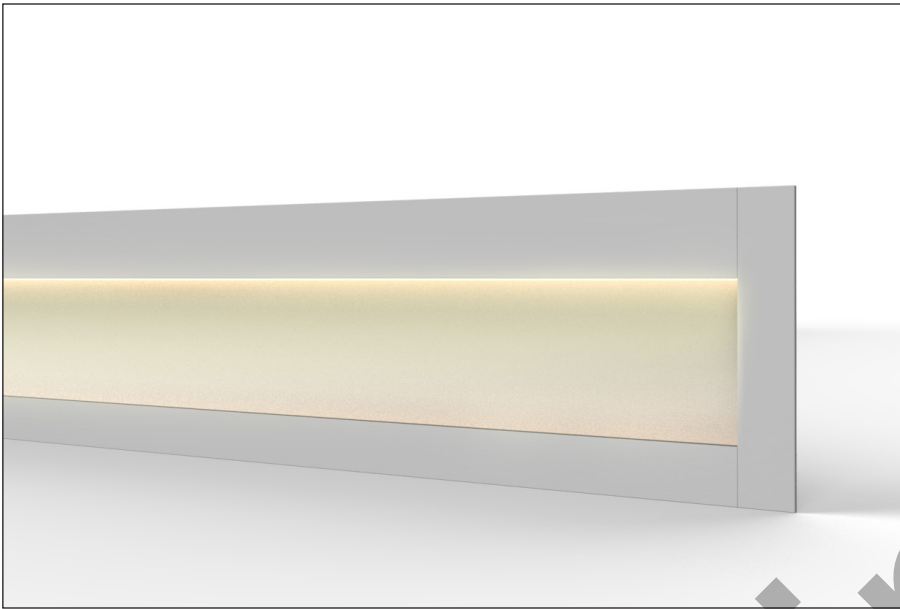


Product	Finish	Reflector	Length
WALY	SL	SL	8
Wally	SL = Silver	SL = Silver	8 8ft

Silver Trim / Silver Reflector *Field paintable*

AVAILABLE LIGHT ENGINES

SB, HO, HD, XS, *VHO

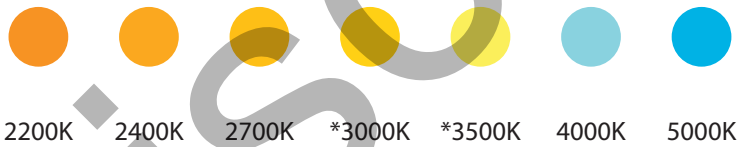


VA




2200K - 3000K (01)
2700K - 4000K (02)
2200K - 6500K (03)



RGB




RGBW




Based on 3000K

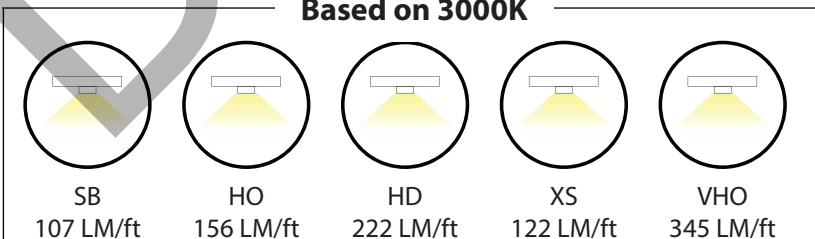


VA
104 LM/ft
(03)



RGB
56 LM/ft
(Total)



RGBW
108 LM/ft
(Total)

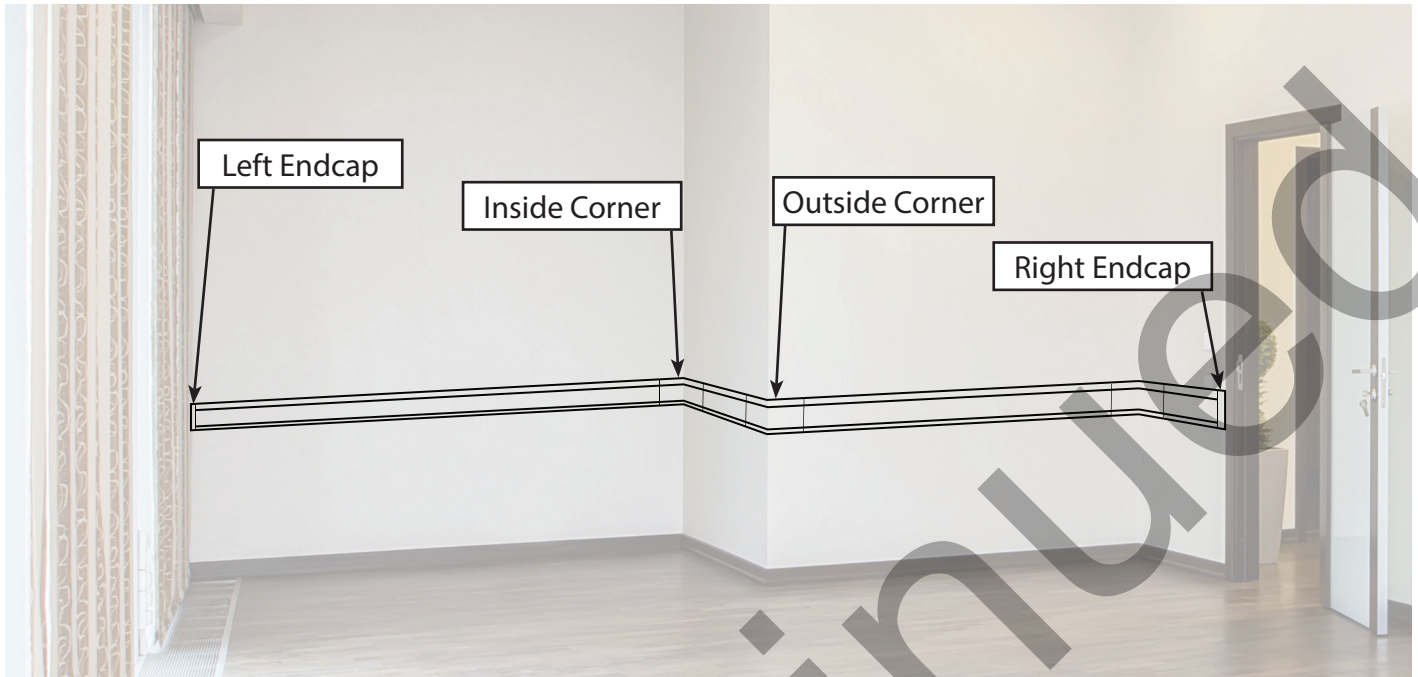

Construction

Housing - 6063 Aluminum T5 (shipped in 8 ft. lengths)

Reflector - A380 Aluminum (shipped in 8 ft lengths)

Lens - Frosted Polycarbonate

Available Light Engines

[TivoTape SB](#)
[TivoTape HO](#)
[TivoTape XS](#)
[TivoTape HD](#)
[TivoTape VHO](#)
[TivoTape Variable White](#)
[TivoTape RGB](#)
[TivoTape RGBW](#)

Power Supply

Remotely driven (see available power supplies located on the corresponding light engine spec sheet for more details.)

Listings

UL

Mounting

Recommened for use in 5/8" drywall or similar depth material. Fixture is screwed directly to studs. Contact factory for custom application mounting solutions.

Corners: Miter Channel in field to create inside and outside corners.

Finish

Housing and reflector come in an anodized nickel finish standard. Housing may be field painted to match wall finish.

Warranty

5 Year limited warranty, see terms and conditions for details.