

tivoli®

TRACE



VERTICAL



Project: _____ Type: _____

- Constructed using flexible SMD LEDs with zero voltage drop for reliability and uniformity of light
- Used to outline structures or applications where traditional glass neon is used
- Low Voltage 24V DC
- Available in Non-Dimming or Dimming version
- Long-life LEDs with tight cutting increments for precise field installation
- UV Stabilized for exterior use with silicone housing (no yellowing or cracking)
- IP67 Rating
- IK07 Rating - protected against 2 joules impact
- 1 Bin, 1.5 step color consistency

Dimensions

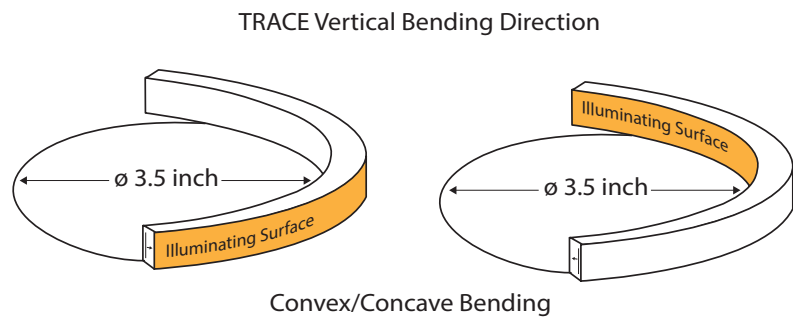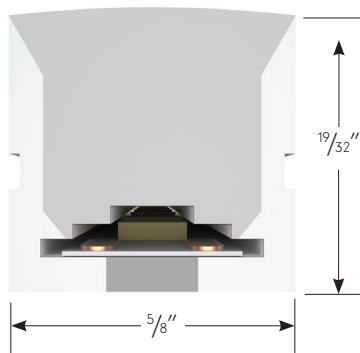

Order Specification Guide

NOTE: Lengths and quantity of each run must be submitted at time of order.
 TRACE is factory prep only. In-field cutting will void warranty.

PRODUCT CODE	INTENSITY	PROFILE	LED COLOR	VOLTAGE
TRCE		V		24
TRCE = Trace Flexible Light	L = Low Output S = Standard Output H = High Output	V = Vertical	24 = 2400K 27 = 2700K 30 = 3000K 35 = 3500K* 40 = 4000K 50 = 5000K* GR = Green* BL = Blue RD = Red AM = Amber*	24 = 24V DC

*Special Order Option. Consult factory for lead time and MOQ.


Specifications

Output (2700K)			
LED Intensity	Low Output	Standard Output	High Output
Lumens (lm/ft)	87	174	261
Beam Angle	115.8°		
Efficacy (lm/W)	58		
LEDs	2835		
CRI	>80		
Electrical			
Dimming	TRIAC, ELV, MLV, 0-10V, DMX		
Input Voltage	24V DC		
Power Consumption (W/ft)	1.5	3	4.5
Maximum Run	58'	29'	19'
Physical			
Dimensions	5/8" X 19/32"		
Cutting Increments	1.97"		
Material	UV, Solvent, Saltwater resistant silicone		
Wire Exit Options	Front, Side, Bottom		
LED PIN Temperature	60.9°C / 141.6°F		
Storage Temperature	-25°C / -13°F - 60°C / 140°F		
Ambient Temperature	Ta _{min} = -25°C / -13°F, Ta _{max}		
Certification and Testing			
Certification	UL		
Environment	Wet Location		
IP Rating	IP67		
IK Rating	IK07		
Warranty	3 Years		

- Maximum Run length refers to single side feed in serial connection
- The given color temperature is the strip (after coating) color temperature
- The given data are typical values due to the tolerances of the production process and electrical components; values for the light output and electrical power can vary up to 10%

Photometrics


TRACE Vertical: Based on 2700K

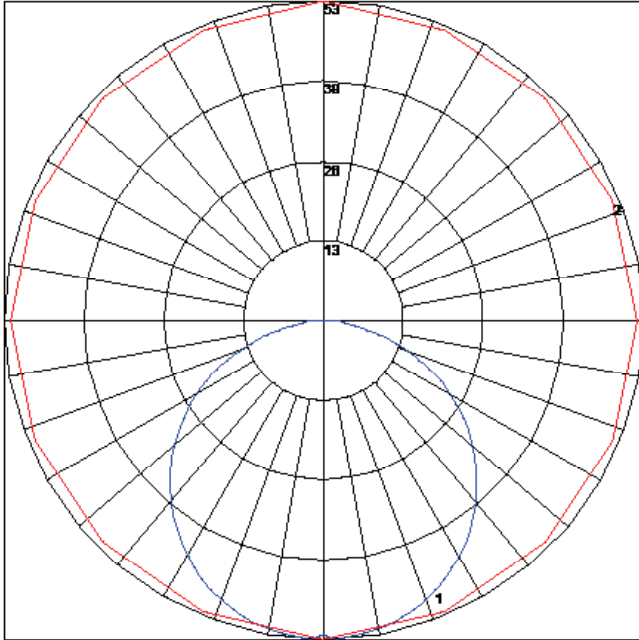

Maximum Candela = 52.6
 Located At Horizontal Angle = 90
 Vertical Angle = 2.5
 #1 Vertical Plane Through Horizontal Angles (90-270) (Through Max. Cd.)
 #2 Vertical Cone Through Vertical Angle (2.5) (Through Max. Cd.)


TM-30

Hue Bin	R ₁	Graphic Shifts (%)	
		Chroma	Hue
1	77	-11%	1%
2	80	-8%	6%
3	80	-4%	9%
4	89	-3%	3%
5	92	-2%	3%
6	94	-1%	-2%
7	85	-7%	-3%
8	91	-5%	2%
9	84	-6%	7%
10	78	-3%	13%
11	80	2%	13%
12	84	7%	1%
13	85	3%	-9%
14	78	4%	-16%
15	83	-5%	-7%
16	73	-9%	-16%

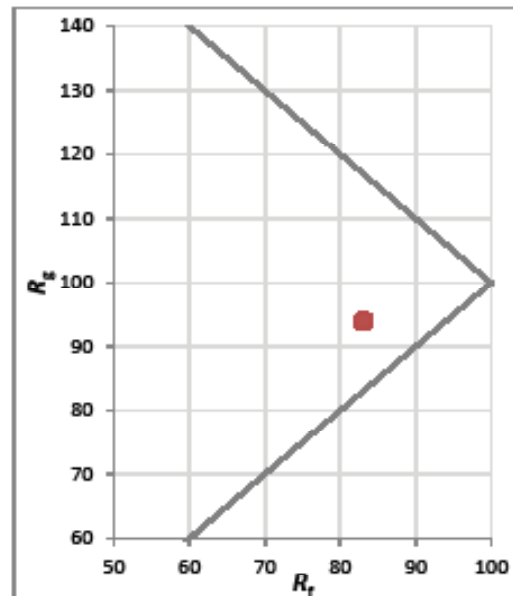


TM-30


TRACE Vertical: Based on 2700K

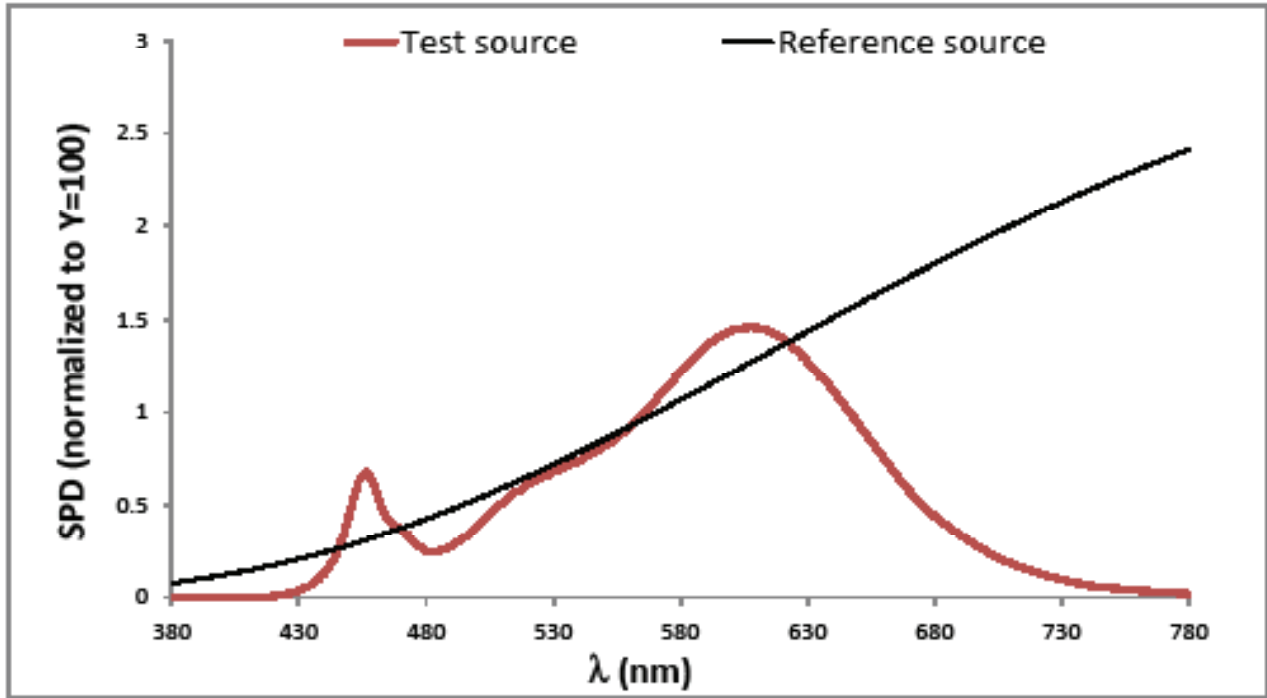

Color Vector Graphic

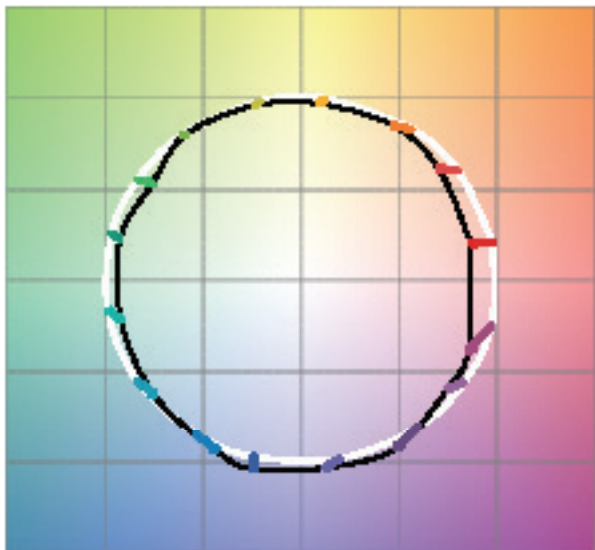


Color Distortion Graphic

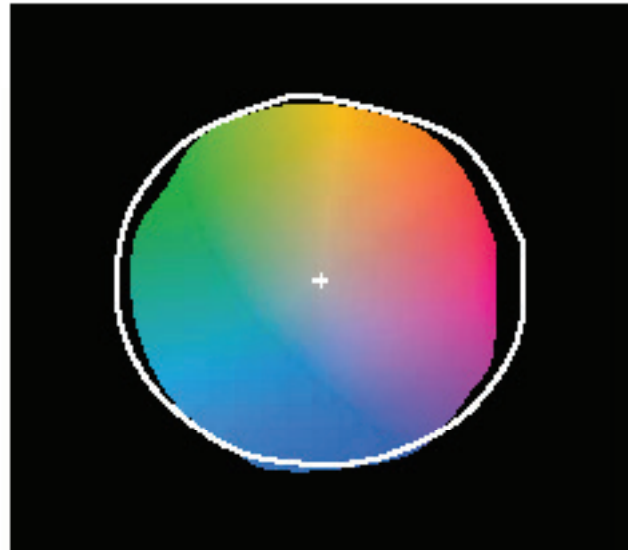


TM-30

TRACE Vertical: Based on 2700K

Hue Angle Bin vs. Fidelity Index


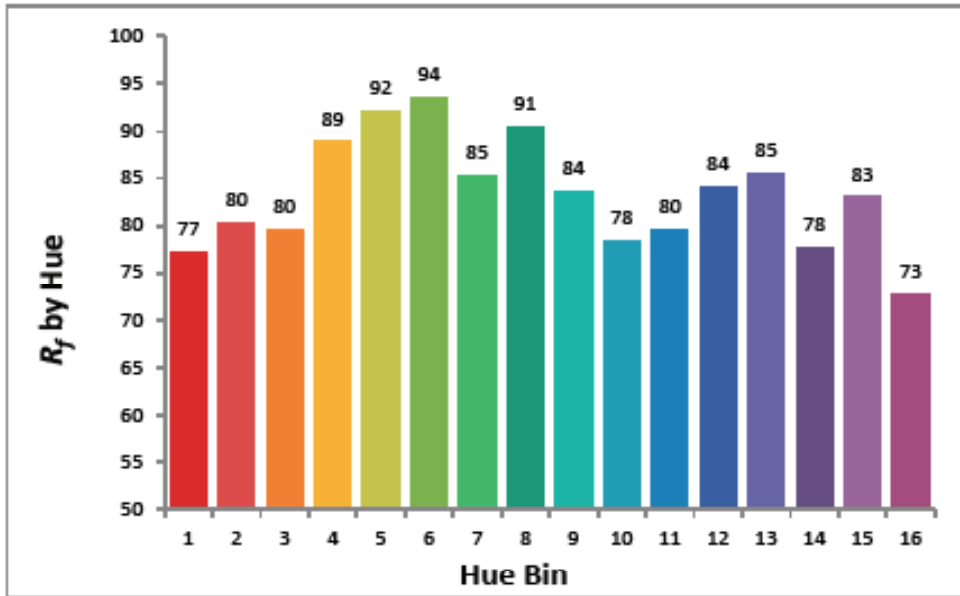


Hue Angle Bin vs. Change of Chroma


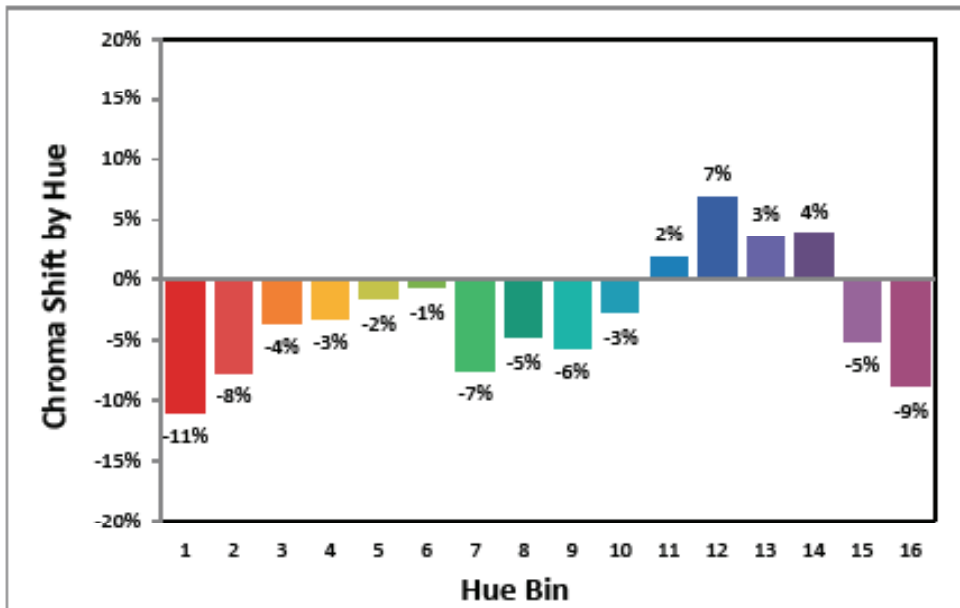


UV Stabilized Polycarbonate Power Lead Guide


Note: Total run length will increase by 3/5" after both left, and right end preps are installed. See the example below.

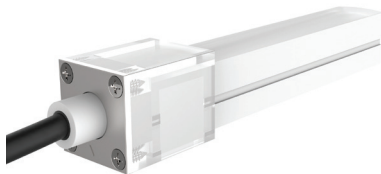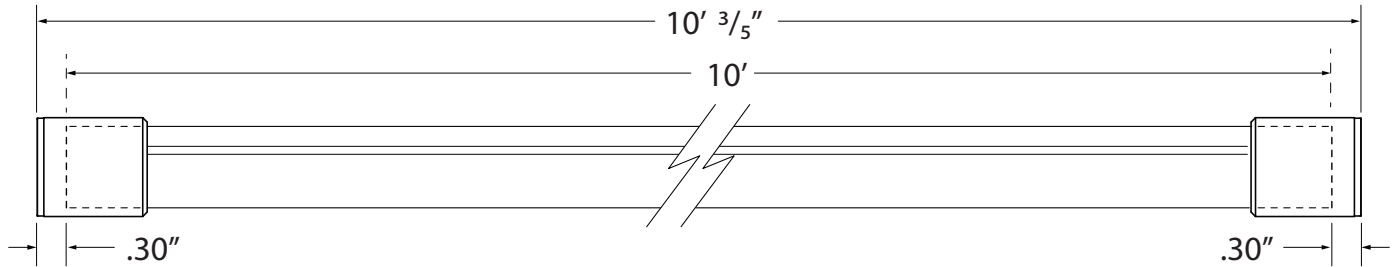


FRONT
Front Lead Entry
5' Power Lead Cable with End Cap

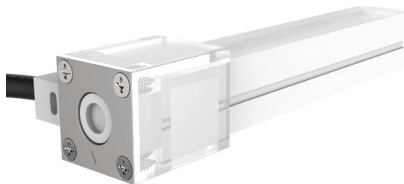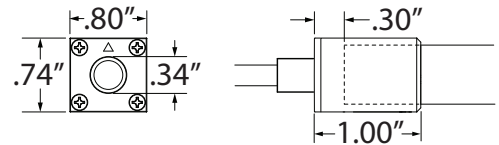


SIDE
Side Lead Entry
5' Power Lead Cable with End Cap

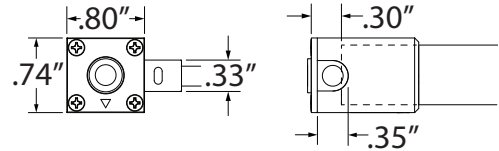

BOTTOM
Bottom Lead Entry
5' Power Lead Cable with End Cap

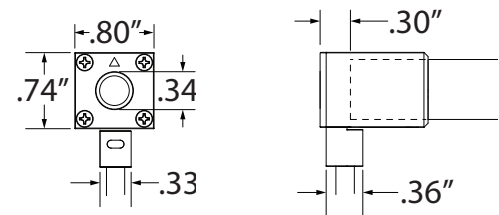


END CAP
End Cap (No Lead)
End Cap Kit with 4 Screws

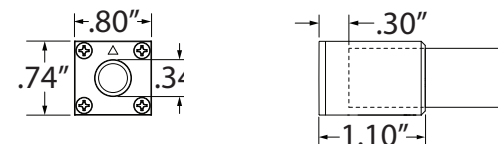


Power Leads - How to Configure

It is important to note the orientation of TRACE and what is considered Left Facing and Right Facing. TRACE is polarity specific and proper submission of power leads for each run is necessary for factory prep standards.

VERTICAL TRACE - The cut window will always indicate as Bottom (Image B) and positive (+) polarity will indicate front facing (Image A).

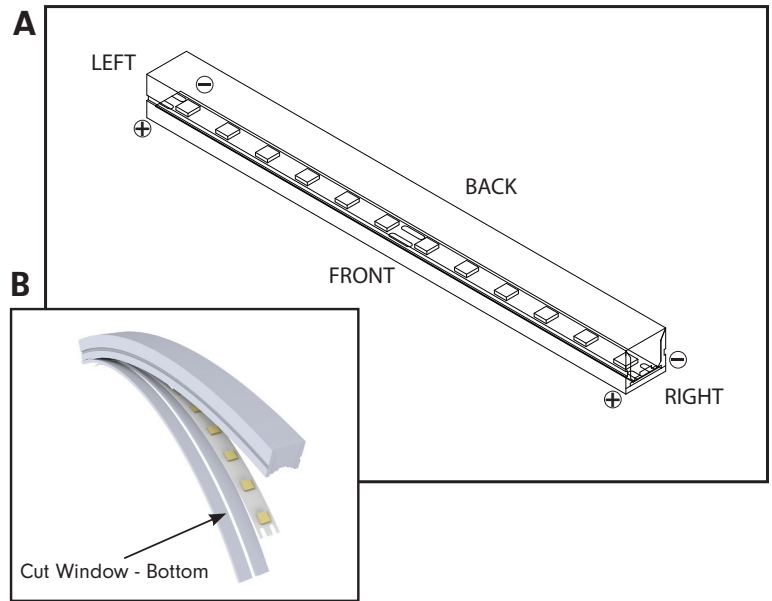


Power Lead Configurations

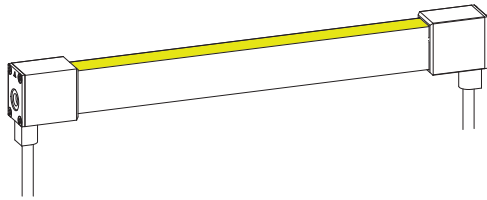


TRCE-V-LEAD-B-B

Left Facing Bottom Lead with 5' Power Cable to Right Facing Bottom Lead with 5' Power Cable

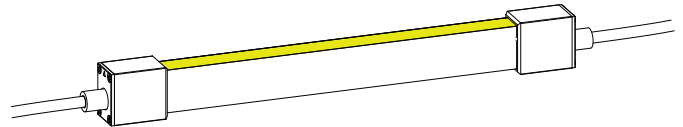

TRCE-V-LEAD-F-F


Left Facing Front Lead with 5' Power Cable to Right Facing Front Lead with 5' Power Cable

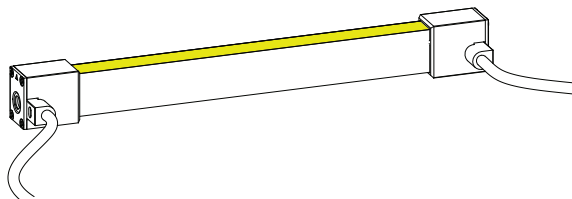


TRCE-V-LEAD-S-S

Left Facing Side Lead with 5' Power Cable to Right Facing Side Lead with 5' Power Cable


Power Lead Configurations

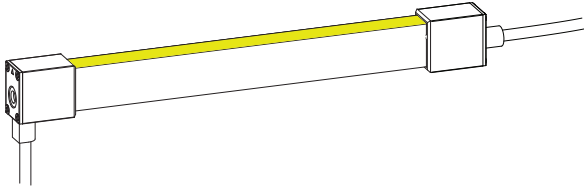


TRCE-V-LEAD-B-F
Left Facing Bottom Lead with 5' Power Cable to
Right Facing Front Lead with 5' Power Cable

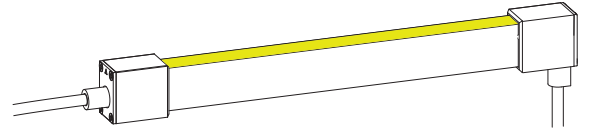


TRCE-V-LEAD-F-B
Left Facing Front Lead with 5' Power Cable to
Right Facing Bottom Lead with 5' Power Cable

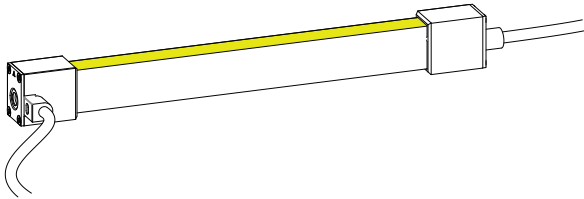


TRCE-V-LEAD-S-F
Left Facing Side Lead with 5' Power Cable to
Right Facing Front Lead with 5' Power Cable

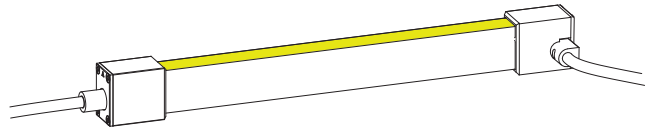

TRCE-V-LEAD-F-S
Left Facing Front Lead with 5' Power Cable to
Right Facing Side Lead with 5' Power Cable

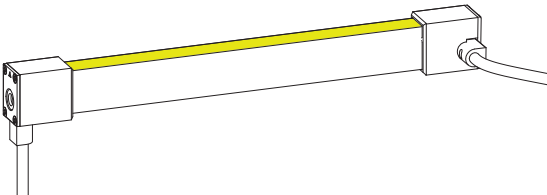


TRCE-V-LEAD-B-S
Left Facing Bottom Lead with 5' Power Cable to
Right Facing Side Lead with 5' Power Cable

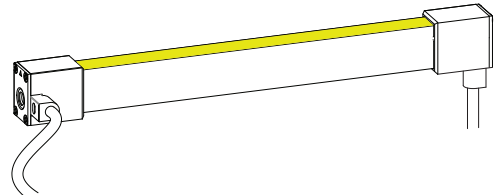


TRCE-V-LEAD-S-B
Left Facing Side Lead with 5' Power Cable to
Right Facing Bottom Lead with 5' Power Cable


Power Lead Configurations

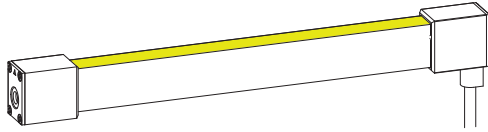


TRCE-V-LEAD-E-B
Left Facing End Cap Lead to Right Facing Bottom Lead with 5' Power Cable

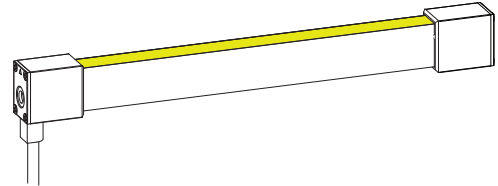


TRCE-V-LEAD-B-E
Left Facing Bottom Lead with 5' Power Cable to Right End Cap

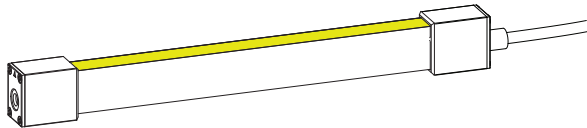


TRCE-V-LEAD-E-F
Left Facing End Cap Lead to Right Facing Front Lead with 5' Power Cable

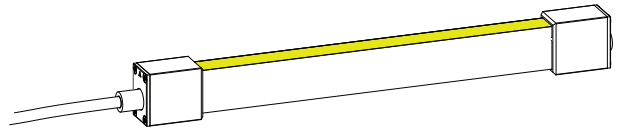

TRCE-V-LEAD-F-E
Left Facing Front Lead with 5' Power Cable to Right End Cap

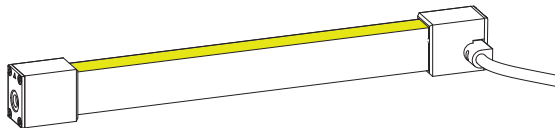

TRCE-V-LEAD-E-S
Left Facing End Cap Lead to Right Facing Side Lead with 5' Power Cable

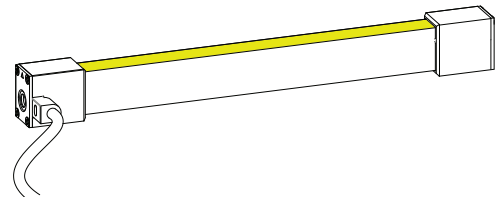



TRCE-V-LEAD-S-E
Left Facing Side Lead with 5' Power Cable to Right Facing End Cap

Mounting Options





TRCE-V-SLV-SCHAN-6.5

Straight Channel
Vertical Profile Only
6.56' Length, Aluminum

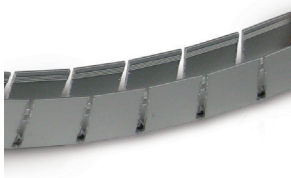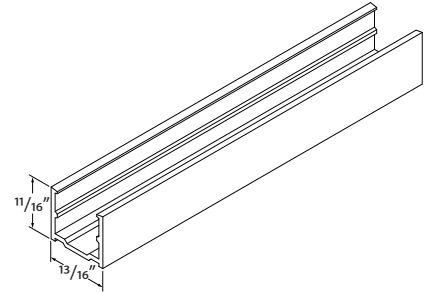


TRCE-V-SLV-NCHAN-6.5

Notched Channel
Vertical Profile Only
Radius Bend: 11"
6.56' Length, Aluminum

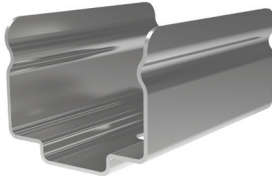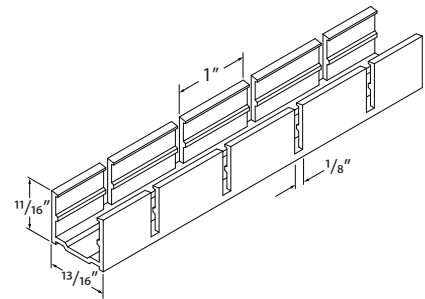

TRCE-V-SLS-MTCLIPS

Mounting Clips
Vertical Profile Only
2 Stainless Steel Clips with 2 Screws

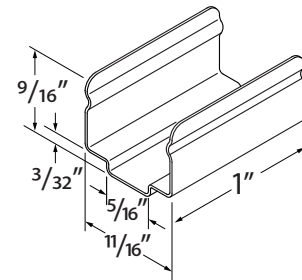


FLXD-SIL-GE-10

GE Silicone 10oz Tube
Use to adhere TRACE into entire run length of channel
25' estimated bead length per 10oz tube


Controls & Software

CONTROLS

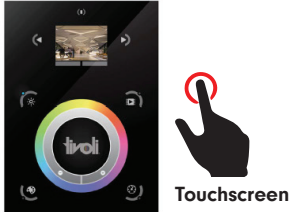


Touchscreen

TVOQ-10-XX-7
 XX = BK (black), WH (white)
 1024 DMX channel, 500 scene,
 10 zone, glass touch screen



Touchscreen

TVOQ-2-BK
 Black
 512 DMX channel, 99 scene,
 1 zone, glass touch screen

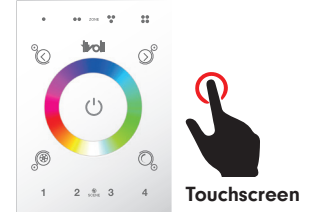

Touchscreen

TVOQ-1-WHT
 16 DMX channel, 16 scene,
 4 zone, glass touch screen

SOFTWARE



Cue™ and CuePro™ softwares are specifically designed for the TivoCUE™ in-wall DMX controls and includes an array of tools required by the latest DMX lighting fixtures. Intuitive, with easy-to-use effects that can be dropped into timelines, and multi-zone synchronization capabilities allow you to program a project effortlessly.



Power Supplies - Indoor

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-D	Indoor / Damp	100-277V AC 50/60 HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-D				2	2x96W	2x4A
	ADUL-320-3-4-24-D				3	3x96W	3x4A

ADUL - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-DOT	Indoor / Damp	100-277V AC 50/60 HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-DOT				2	2x96W	2x4A
	ADUL-320-3-4-24-DOT				3	3x96W	3x4A

ADUL - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-DIN	Indoor / Damp	100-277V AC 50/60 HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-DIN				2	2x96W	2x4A
	ADUL-320-3-4-24-DIN				3	3x96W	3x4A

ADUL - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-240-2-4-24-DIN-2	Indoor / Damp	100-277V AC 50/60 Hz	24V DC	2	2x96W	2x4A
	ADUL-320-3-4-24-DIN-3				3	3x96W	3x4A

Power Supplies - Outdoor

ADNM - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-90-1-4-24-D	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	90W	3.75A
	ADNM-120-1-4-24-D				1	96W	4A
	ADNM-240-2-4-24-D				2	2x96W	2x4A
	ADNM-320-3-4-24-D				3	3x96W	3x4A

ADNM - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-90-1-4-24-DOT	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	90W	3.75A
	ADNM-120-1-4-24-DOT				1	96W	4A
	ADNM-240-2-4-24-DOT				2	2x96W	2x4A
	ADNM-320-3-4-24-DOT				3	3x96W	3x4A

ADNM - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-90-1-4-24-DIN	Indoor / Outdoor	100-277V AC 50/60 Hz	24V DC	1	90W	3.75A
	ADNM-120-1-4-24-DIN				1	96W	4A
	ADNM-240-2-4-24-DIN				2	2x96W	2x4A
	ADNM-320-3-4-24-DIN				3	3x96W	3x4A

ADNM - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-240-2-4-24-DIN-2	Indoor / Outdoor	100-277V AC 50/60 Hz	24V DC	2	2x96W	2x4A
	ADNM-320-3-4-24-DIN-3				3	3x96W	3x4A

ADNM - DMX/DALI FLICKER-FREE FOR TV STUDIO

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-120-1-4-24-DTV	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	1x96W	1x4A
	ADNM-240-2-4-24-DTV				2	2x96W	2x4A
	ADNM-320-3-4-24-DTV				3	3x96W	3x4A

Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)

DIMMING - MLV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

DIMMING - ELV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W