



**Features**

- Electronic power supply
- Input leads are 18AWG 600V
- Output leads are 16AWG 300V
- 5 year warranty
- Dimmable with any ELV, MLV, CL forward phase or reverse phase.
- Dry and Damp location rated
- Class 2 Electronic Dimmable

**Environmental**

- Heat dissipation: Convection
- Enclosure Temperature does not exceed 70°C at 45°C ambient and fully loaded

**Mechanical Specification**



- Black Powder Coated Steel
- Wiring compartment has 6 knockout sizes EMECH961424
- Wiring compartment has 4 knockout sizes EMECH601512





**Ordering Information**

DESCRIPTION	CAT NO	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CAPACITANCE	DIMENSION
EMEC Series Class 2 Transformer	EMECH961424	100 - 277V AC	24V DC	1	96W	10W	4A	3.66"W x 8.7"L x 1.54"D
EMEC Series Class 2 Transformer	EMECH601512	100 - 277V AC	12V DC	1	48W	10W	5A	3.62"W x 7.4"L x 1.02"D

EMECH961424

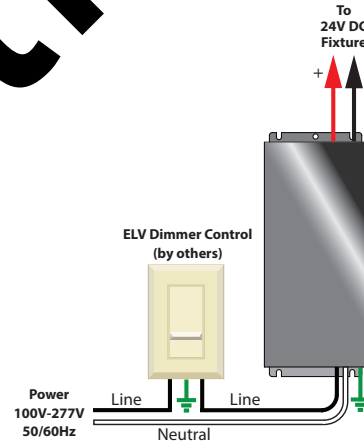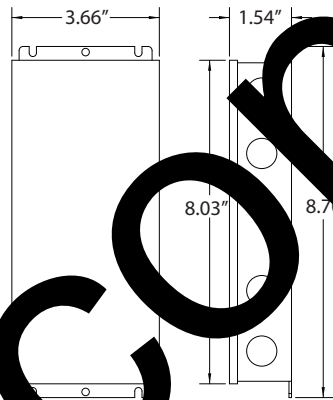

EMECH601512

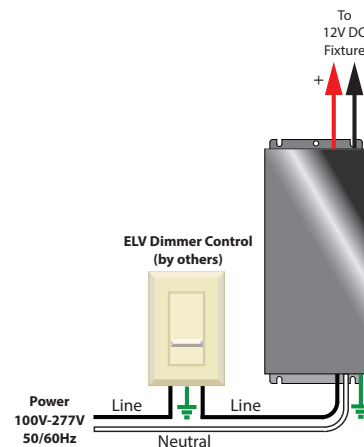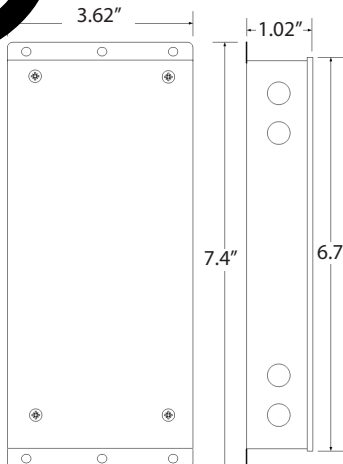

DISCONTINUED