

24V DC

3 W/ft
234 LM/ft (total 22K-65K)

Cuttable 4"

32'
Max Continuous Run
see page 4 for details

Dimmable

HIGH CRI
90+ CRI

3M
VHB Tape

IP54

eXo shield
ultimate dust and moisture protection

5YR
Warranty

cue pro
DMX Controls
Available on page 4

2200K — 3000K — 2700K — 4000K — 2200K — 6500K

Ordering Information

PRODUCT CODE		INTENSITY		INSTALL		LED COLOR		LENGTH		VOLTAGE
TPLD	-	VA	-	I	-		-		-	24

TPLD Tivotape DEFINE 90+ CRI

VA Tunable White

I Indoor

01 2200K - 3000K
02 2700K - 4000K
03 2200K - 6500K

R *Full Roll (164 ft)
MR Maximum Run Length (32')

24 24V DC

NOTE: Don't forget connectors!
For **MR** length choice, please specify connectors needed (see page 2) for each Max Run, at time of ordering.

*Full Roll's include one pack of (10) of each connector type

RoHS COMPLIANT

c UL us LISTED

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 11/27/19

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Discontinued

Power Leads and Jumper Connectors

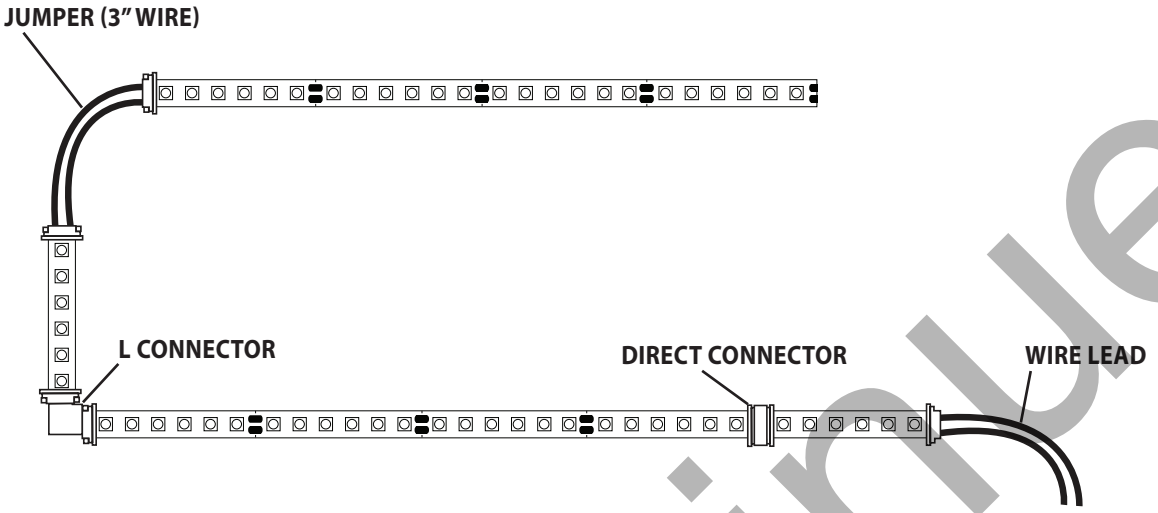

WIRE LEAD
TPL-I-WL-CON-RGB
(PACK OF 10)



JUMPER
TPL-I-JUMP-CON-RGB
(PACK OF 10)

X CONNECTOR
TPL-I-X-CON-RGB
(PACK OF 10)

L CONNECTOR
TPL-I-L-CON-RGB
(PACK OF 10)

DIRECT CONNECTOR
TPL-I-D-CON-RGB
(PACK OF 10)

Mounting Channels





TPL-I-45-MCH-8-S
45˚ Mounting channel, NO LENS OPTION white PVC, length 8'.

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

WARNER







WRNR-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5' lengths

WRNR-LNS-OP-6.5
Lens, opal, length 6.5'

WRNR-EC-01
Solid End Cap

WRNR-EC-02
Powerfeed End Cap

EDGE

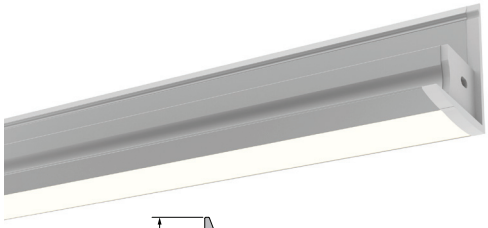





EDGE-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5' lengths

EDGE-LNS-OP-6.5
Lens, opal, length 6.5'

EDGE-EC-01
Solid End Cap

EDGE-EC-02
Powerfeed End Cap

DOME



DOME-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5' lengths

DOME-LNS-OP-6.5
Lens, opal, length 6.5'

DOME-EC-01
Solid End Cap

DOME-EC-02
Powerfeed End Cap

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 11/27/19

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Power Supplies

ADUL - VARIABLE / DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-VW	Indoor / Damp	100-277V AC 50⁄60 Hz	24V DC	1	96W	4A
	ADUL-240-2-4-24-VW				2	2x96W	2x4A
	ADUL-320-3-4-24-VW				3	3x96W	3x4A

ADUL - VARIABLE / DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-240-2-4-24-VW-2	Indoor / Damp	100-277V AC 50⁄60 Hz	24V DC	2	2x96W	2x4A
	ADUL-320-3-4-24-VW-3				3	3x96W	3x4A

Recommended DMX Sub-Controller

DESCRIPTION	CAT NO	MODES	WATTAGE	PRIMARY VOLTAGE	DIMENSION
DMX Sub-controller	TPL-RGBW-180-24	Sub-controller only	5X96W	24V DC	2.87" W X 6.46" L X 1.45" H

Recommended DMX Controller

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT PROTOCOL	MAX UNIVERSE
DMX Controller	TVOQ-1-WH	Indoor	5V DC	DMX 512	1
	TVOQ-2-BK		6V DC		
	TVOQ-2-WH				
	TVOQ-10-BK-7		6-7V DC		
	TVOQ-10-WH-7				2

Touchscreen

TVOQ-1-WH
WH (White only)



Touchscreen

TVOQ-10-XX-7
XX = BK (Black), WH (White)

Touchscreen

TVOQ-2-XX
XX = BK (Black), WH (White)

Discontinued

Accessories

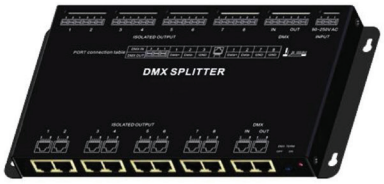

DMX-SPLT-8
DMX Splitter
8 ports of DMX 512, RJ45 and 3-pin
Hardwire Connection

Note: If the number of DMX sub-controllers exceed 32 units, a DMX Splitter is required.

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Electrical & Photometric Date			
Input Voltage	**24V DC**		
Dimming Option	**DMX**		
Power Supply	**Class 2**		
Wire Size (End Prep)	**20 AWG, 4 wire**		
Power Consumption	**3 W/ft.**		
Color Temperature (CCT)	**2200K - 3000K (01)**	**2700K - 4000K (02)**	**2200K - 6500K (03)**
Lumen Output (Total)	**240**	**312**	**210**
Efficacy	**78**	**90**	**76**
Color Rendering Index (CRI)	**93**	**96**	**96**
R9	**65**	**91**	**97**

Physical	
LED Package	**2835**
Cut Increments	**4"**
LEDs/ft	**36**
Operating Temperature	**-40°F (-40°C) ~ 140°F (60°C)**
Environment	**IP54 Damp Location, Conformally Coated**
Maximum Run Length	**32'**
Copper Trace	**3 Ounce**
Adhesive	**3M VHB Tape**
Dimension	**13/32" (10mm)**

Performance	
Certification	**UL Listed**
Lumen Maintenance (L70) Hours	**60,000**
Binning Tolerance	**2 Step MacAdam Elipse**
Warranty	**5 Years**

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 11/27/19

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458