

CAT:	FEET:
------	-------

TYPE:	PROJECT:
-------	----------



A patented, ADA compliant, co-extruded bullnose step light with contrasting stripe or 100% black (consult factory) and single or double row of LEDs.

**Feature**

- Titanium series LED PCB provides a choice of color for both bottom and top rows.
- Designed for secure foot placement in 3' to 12' lengths with a reflective edge for delineation and patron's safety.
- Pre-cut and assembled according to specification.
- Optional illuminated row indicator is available (see Page 2).
- Matching field-cutable wireway with contrasting grey stripe is available in 8' lengths.
- Soft-molded end caps complete the integrated system. Individually replaceable LED PCBs easily snap into Titanium modules for easy and economical maintenance.

**Mounting**

Easy glue and screw down installation with recommended construction adhesives.

**Applications**

Required for 90° indoor steps.

Available in custom lengths up to 12 feet (consult factory).

**Warranty**

5 years




**Technical Information**

Watts/ft Top Row Indicator	0.0048
*Lumens/ft Bottom Row Illuminator	4.4
*Watts/ft	0.22
*Lumen/watt	20
CRI	>80/TYP83
Kelvin Temp	1900K, 2700K, 3000K, 3500K, 4000K (+/-80K) 3SDCM, Red, Blue, Amber
Rated Life	75,000 hrs.
Max Ordering Length	12'
**Order Increments	6"
Operating Voltage	12V DC
Power Supply	Class 2
Dimmable	Yes


\* 3000K Sample

\*\*Available in 6" increments up to 12'. Specify when ordering.

**Profile Dimensions**

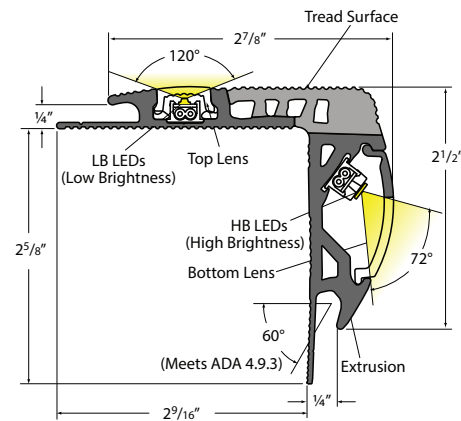

**Required Field Conditions**

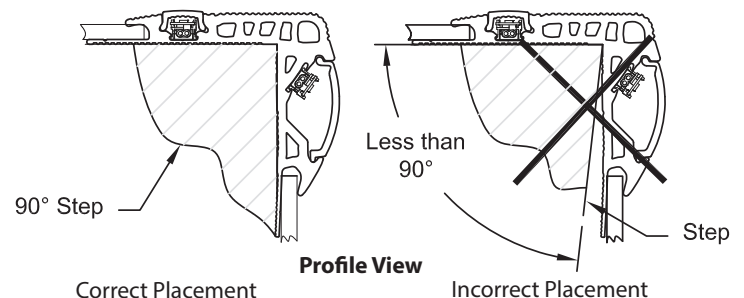

**Note:** If step riser is not 90°, consult factory.

Recommended Power Supplies

**ADUL - NON DIMMING**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-D	Indoor / Damp	100-277V AC 5ø60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-D				2	2x60W	2x5A
	ADUL-240-3-5-12-D				3	3x60W	3x5A
	ADUL-320-4-5-12-D				4	4x60W	4x5A

**ADUL - 0-10V DIMMING**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DOT	Indoor / Damp	100-277V AC 5ø60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DOT				2	2x60W	2x5A
	ADUL-240-3-5-12-DOT				3	3x60W	3x5A
	ADUL-320-4-5-12-DOT				4	4x60W	4x5A

**ADUL - DMX SINGLE ADDRESS**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DIN	Indoor / Damp	100-277V AC 5ø60 Hz	12V DC	1	60W	5A
	ADUL-150-2-5-12-DIN				2	2x60W	2x5A
	ADUL-240-3-5-12-DIN				3	3x60W	3x5A

**ADUL - DMX MULTI ADDRESS**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 5ø60 Hz	12V DC	2	2x60W	2x5A
	ADUL-240-3-5-12-DIN-3				3	3x60W	3x5A
	ADUL-320-4-5-12-DIN-4				4	4x60W	4x5A

**INFINITY - MLV / ELV / 0-10V / PWM / TRIAC**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-2.5-12	Indoor / Outdoor	100 - 277V AC	12VDC	1	30W	3W	2.5A
	INF-J-60-1-5-12				1	60W	6W	5A
	INF-J-180-3-5-12				3	3x60W	3x6W	3x5A
	INF-J-300-5-5-12				5	5x60W	5x6W	5x5A

## Recommended Dimmers

### DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)

### DIMMING - MLV


DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

### DIMMING - ELV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W


### DIMMING - DMX

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT PROTOCOL	MAX UNIVERSE
DMX Controller	TVOQ-1-WH	Indoor	5V DC	DMX 512	1
	TVOQ-2-BK		6V DC		
	TVOQ-2-WH				
	TVOQ-10-BK-7		6-7V DC		2
	TVOQ-10-WH-7				




Touchscreen

**TVOQ-1-WH**  
WH (White only)



Touchscreen

**TVOQ-10-XX-7**  
XX = BK (Black), WH (White)



Touchscreen

**TVOQ-2-XX**  
XX = BK (Black), WH (White)

## Ordering Information


PRODUCT CODE	LED COLOR TOP ROW LED 6" O.C.	LED COLOR BOTTOM ROW LED 12" O.C.	LEFT END CAP	RIGHT END CAP	POWER FEED	EXT COLOR	FIXTURE LENGTH*
<b>ST</b> ST = Softstep II Titanium	19 = 1900K 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K AM = Amber RD = Red BL = Blue NL = No LED	19 = 1900K 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K AM = Amber RD = Red BL = Blue NL = No LED	S = Standard C = Carpet to Carpet N = No End Cap	S = Standard C = Carpet to Carpet N = No End Cap	L = Left R = Right	B = All Black T = Two Tone	3.0 = 3' 3.5 = 3.5' 4.0 = 4' 4.5 = 4.5' 5.0 = 5.0' 5.5 = 5.5' 6.0 = 6'

\*Available in .5ft. increments up to 12'

## Optional Row Indicator Information

\*For ordering details see sample organizing chart below.

Figure (A) Example figure shows Row Indicators on middle staircase, steps 10, 13, and 16.

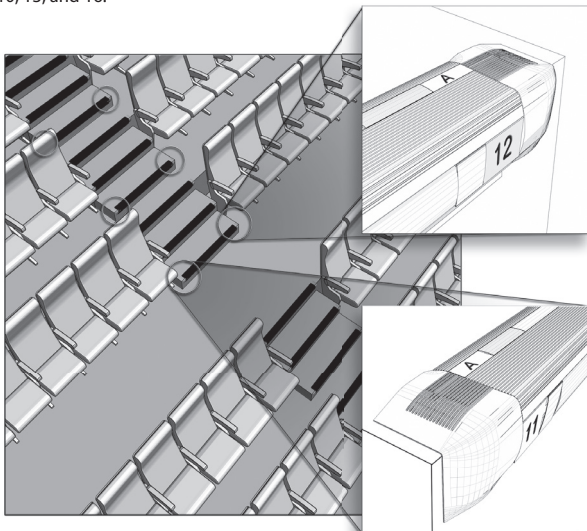

### Character Designation

When selecting Row Indicators for your SoftStep II™ Titanium installation, here are some examples and guides to make your ordering process easier.

Within the figure (A) illustration we have offered an example spreadsheet to help organize your needs when designing row indicators into your venue. Your spreadsheet should reflect the call out and placement of each step by row and it's number that requires an indicator as shown in figure (A).

When looking at a seating layout from the stage or screen perspective, usually the first chair on the left side of the first row would be A1. In our illustration we have an orchestra pit section, so our Row A and seat 1 to 11 start on the isle. Seats A11 and A12 are separated by the middle staircase and reflect that design in the Row Indicators as shown.

With every venue, each auditorium has it own unique design parameters. To assist you, the SoftStep II™ Titanium row indicators offer THREE CHARACTER placements of any letter or number combination you desire. Defining those character call outs is as easy as listing them in a spreadsheet as shown in figure (B).


To help organize and clarify your need for row indicators, it is important to create a spread sheet that reflects the placement of row indicators in your working drawings or blueprints. Our figure (A) example shows the placement of row indicators on steps 10, 13 and 16 in the middle staircase.

Figure (B)


SAMPLE ORGANIZING CHART							
PROJECT:	CUSTOMER:			INSTALLER:			
AUDITORIUM	STAIRCASE	STEP NUMBER	COLOR	UPPER LEFT	LOWER LEFT	UPPER RIGHT	LOWER RIGHT
3	MIDDLE	10	A	A	11	A	12
3	MIDDLE	13	A	B	11	B	12
3	MIDDLE	16	A	C	11	C	12

## Row Indicator Ordering Information


PRODUCT CODE	OPTION	PLACEMENT	LED COLOR	ROW INDICATOR POSITION
<b>ST</b> ST = Softstep II Titanium	<b>RI</b> RI = Row Indicator	BTH = Both LWR = Lower UPR = Upper	19 = 1900K 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K AM = Amber RD = Red BL = Blue DB = Dolby Blue NL = No LED	B = Both L = Left R = Right

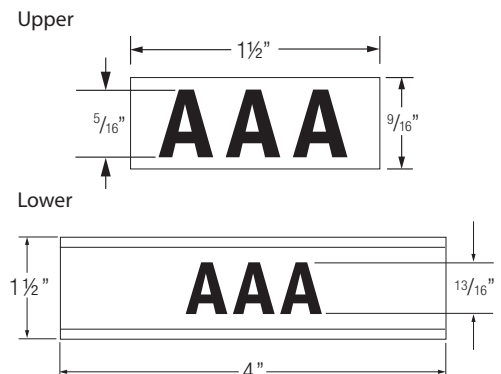


## Mounting Accessories




**ST-LENS-C-12**  
Clear top lens, 12'  
**ST-LENS-B-12**  
Bronze top lens, 12'  
**ST-LL-12**  
Lower lens, 12'  
**ST-BS-12**  
Base Extrusion 12', Grey Tread  
**ST-BS-BK-12**  
Base Extrusion 12', All Black




**CARPET TO EDGE END CAP**  
**ST-EC-L**  
Left End Cap  
**ST-EC-R**  
Right End Cap




**WW-CC-BK-8**  
Carpet to Carpet Base and Cover 8' - Black  
**WW-CC-GY-8**  
Carpet to Carpet Base and Cover 8' - Grey  
**WW-CW-BK-8**  
Carpet to Wall Base and Cover 8' - Black  
**WW-CW-GY-8**  
Carpet to Wall Base and Cover 8' - Grey  
**WW-CW-BS-8**  
Base Only, Carpet to Wall, Black, 8'  
**WW-CC-BS-8**  
Base Only, Carpet to Carpet, Black, 8'  
**WW-TC-CL-8**  
Lens Cover Only, Clear, 8'  
**WW-TC-BK-8**  
Lens Cover Only, Black, 8'  
**WW-TC-BZ-8**  
Lens Cover Only, Bronze, 8'  
**WW-TC-GY-8**  
Lens Cover Only, Gray, 8'




**WW-CE-BK-8**  
Carpet to Edge Base and Cover 8' - Black  
**WW-CE-GY-8**  
Carpet to Edge Base and Cover 8' - Gray  
**WW-CE-BS-8**  
Base Only, Carpet To Edge, Black, 8'  
**WW-TC-CL-8**  
Lens Cover Only, Clear, 8'  
**WW-TC-BK-8**  
Lens Cover Only, Black, 8'  
**WW-TC-BZ-8**  
Lens Cover Only, Bronze, 8'  
**WW-TC-GY-8**  
Lens Cover Only, Gray, 8'




**BS-CC-8**  
Wall wireway, 8' Black Base & Conduit Cover



**CARPET TO CARPET END CAP**  
**ST-CC-EC-L**  
Left End Cap, Carpet-To-Carpet  
**ST-CC-EC-R**  
Right End Cap, Carpet-To-Carpet



**STP-EXTNDR-12**  
SoftStep Landing Tread Extender, 12'



**ST-R-12**  
Step Reducer, 12' (shown)  
**TM-3/16**  
Concrete Screw 3/16" x 1 1/4"  
**RONDB-5/32**  
Concrete Drill Bit 5/32" Dia




**EXTRUSION ADHESIVE**  
**ADH-MB-75AM-10**  
Extrusion adhesive, 10.1 oz tubes, sold individually. 30 per case.  
**ADH-MB-75AM-29**  
Extrusion adhesive, 29 oz tubes, sold individually. 12 per case.




**END CAP ADHESIVE**  
**ADH-5-CA**  
Clear liquid adhesive for end caps. 5 oz tube.


## Replacement Parts




**REPLACEMENT LED PCB (TOP ROW)**  
**TT-LED-19**  
1900K  
**TT-LED-27**  
2700K  
**TT-LED-30**  
3000K  
**TT-LED-35**  
3500K  
**TT-LED-40**  
4000K  
**TT-LED-AM**  
Amber  
**TT-LED-BL**  
Blue  
**TT-LED-DB**  
Dolby Blue  
**TT-LED-RD**  
Red



**REPLACEMENT LED PCB (BOTTOM ROW)**  
**TT-LED-19-B**  
1900K  
**TT-LED-27-B**  
2700K  
**TT-LED-30-B**  
3000K  
**TT-LED-35-B**  
3500K  
**TT-LED-40-B**  
4000K  
**TT-LED-AM-B**  
Amber  
**TT-LED-BL-B**  
Blue  
**TT-LED-DB**  
Dolby Blue  
**TT-LED-RD-B**  
Red




**OPTIONAL ROW INDICATOR REPLACEMENT LAMP**  
**RI-LED-19**  
1900K  
**RI-LED-27**  
2700K  
**RI-LED-30**  
3000K  
**RI-LED-35**  
3500K  
**RI-LED-40**  
4000K  
**RI-LED-AM**  
Amber  
**RI-LED-BL**  
Blue  
**TT-LED-DB**  
Dolby Blue  
**RI-LED-RD**  
Red



**INDOOR REPLACEMENT STRAND WITH LEDs (Top Row)**  
Ordered in 1' increments  
**TT-STP-06-STRD-XX**  
Replacement Strand - 6" O.C., Available in XX = 19/27/30/35/40/RD/BL/DB/AM

**TT-PH**  
Power harness with lead wire & crimp connector



**INDOOR REPLACEMENT STRAND WITH LEDs (Bottom Row)**  
Ordered in 1' increments  
**TT-STP-12-STRD-XX-B**  
Replacement Strand -12" O.C., Available in XX = 19/27/30/35/40/RD/BL/DB/AM