


CAT:	FEET:
------	-------

TYPE:	PROJECT:
-------	----------

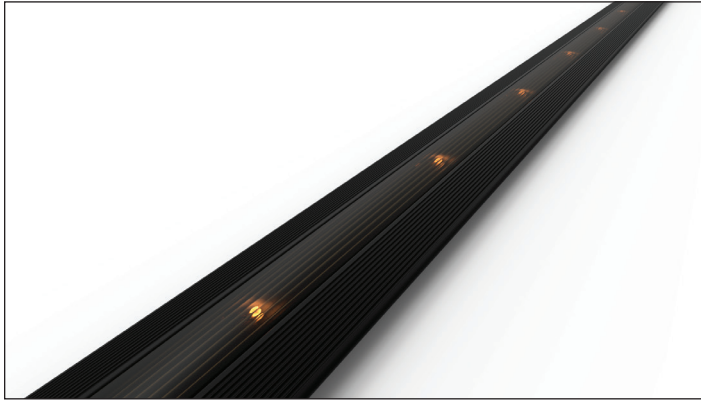

Aisle lighting edge delineation system is Patented, field-cutttable, co-extruded, rigid and soft PVC with Titanium Series LED lighting engine.

Features

- Individually replaceable LED PCB's snap into Titanium modules for easy and economical maintenance.
- Impervious to water and includes an integral seal for each end.

Mounting

Base installed using glue and screws for durability with snap on lens.

Applications

Illuminated walkway edge delineation system for theaters and auditoriums.

Warranty

5 years





Technical Information

Profiles	Carpet-to-Edge (CE), Carpet-to-wall (CW) Carpet-to-Carpet (CC)			
	4"	6"	12"	18"
LED Spacing O.C.	4"	6"	12"	18"
*Watts/ft	0.0036	0.0024	0.0012	0.0008
CRI	> 80/TYP83			
Kelvin Temp	1900K, 2700K, 3000K, 3500K, 4000K, (+/-80K) SDCM Red, Blue, Amber			
Rated Life	75,000 hrs.			
Max Run Length	120ft./<1W			
Order Increments	4', 8'			
Operating Voltage	12V DC			
Power Supply	Class 2			
Dimmable	Not recommended due to low wattage consumption			

*Based on 3000K

Profile Dimensions

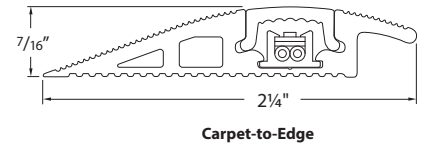

Ordering Information

PRODUCT CODE PROFILE LED COLOR SPACING LENS LENGTH

SATT - [] - [] - [] - [] - []

SATT = Soft Aisle Titanium

CC = Carpet to Carpet
CW = Carpet to Wall
CE = Carpet to Edge

19 = 1900K
27 = 2700K
30 = 3000K
35 = 3500K
40 = 4000K
AM = Amber
RD = Red
BL = Blue

04 = 4"
06 = 6"
12 = 12"
18 = 18"

C = Clear
B = Bronze

4.0 = 4'
8.0 = 8'

Recommended Power Supplies

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-D	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-D				2	2x60W	2x5A
	ADUL-240-3-5-12-D				3	3x60W	3x5A
	ADUL-320-4-5-12-D				4	4x60W	4x5A

ADUL - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DOT	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DOT				2	2x60W	2x5A
	ADUL-240-3-5-12-DOT				3	3x60W	3x5A
	ADUL-320-4-5-12-DOT				4	4x60W	4x5A

ADUL - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DIN	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DIN				2	2x60W	2x5A
	ADUL-240-3-5-12-DIN				3	3x60W	3x5A


ADUL - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	2	2x60W	2x5A
	ADUL-240-3-5-12-DIN-3				3	3x60W	3x5A
	ADUL-320-4-5-12-DIN-4				4	4x60W	4x5A


INFINITY - MLV / ELV / 0-10V / PWM / TRIAC

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-2.5-12	Indoor / Outdoor	100 - 277V AC	12V DC	1	30W	3W	2.5A
	INF-J-60-1-5-12				1	60W	6W	5A
	INF-J-180-3-5-12				3	3x60W	3x6W	3x5A
	INF-J-300-5-5-12				5	5x60W	5x6W	5x5A


Accessories - Extrusion End Caps



SATT-CW-CC-EC-06
L/R Carpet to Wall/Carpet To Carpet End Cap Assembly - Includes 6" pre-mitered extrusion with End Cap installed. Works for left or right. Clear Lens.
SATT-CW-CC-EC-06-B
Same as above with Bronze Lens




SATT-CE-LS-EC-06
Left End Cap Assembly, Carpet to Edge - Includes 6" pre-mitered extrusion with Left End Cap installed. Clear Lens.
SATT-CE-LS-EC-06-B
Same as above with Bronze Lens.




SATT-CE-RS-EC-06
Right End Cap Assembly, Carpet to Edge - Includes 6" pre-mitered extrusion with Right End Cap installed. Clear Lens.
SATT-CE-RS-EC-06-B
Same as above with Bronze Lens.


Mounting Accessories




SATT-LNS-SEALS
Replaceable lens seam seals



JBOX-LP
Junction box, low profile




BS-CC-8
Wall wireway, 8' Black Base & Conduit Cover




BSL-PC-1/4
1/4" Flex Conduit, Black

Replacement Parts




REPLACEMENT LED PCB

- TT-LED-19**
1900K
- TT-LED-27**
2700K
- TT-LED-30**
3000K
- TT-LED-35**
3500K
- TT-LED-40**
4000K
- TT-LED-AM**
Amber
- TT-LED-BL**
Blue
- TT-LED-RD**
Red




4" O.C. REPLACEMENT STRAND WITH LED

- SATT-04-STRAND-XX**
Available in XX = 19/27/30/35/40
- SATT-04-STRAND-RD**
Replacement Strand with Red LED
- SATT-04-STRAND-BL**
Replacement Strand with Blue LED
- SATT-04-STRAND-AM**
Replacement Strand with Amber LED




6" O.C. REPLACEMENT STRAND WITH LED

- SATT-06-STRAND-XX**
Available in XX = 19/27/30/35/40
- SATT-06-STRAND-RD**
Replacement Strand with Red LED
- SATT-06-STRAND-BL**
Replacement Strand with Blue LED
- SATT-06-STRAND-AM**
Replacement Strand with Amber LED




12" O.C. REPLACEMENT STRAND WITH LED

- SATT-12-STRAND-XX**
Available in XX = 19/27/30/35/40
- SATT-12-STRAND-RD**
Replacement Strand with Red LED
- SATT-12-STRAND-BL**
Replacement Strand with Blue LED
- SATT-12-STRAND-AM**
Replacement Strand with Amber LED




18" O.C. REPLACEMENT STRAND WITH LED


- SATT-18-STRAND-XX**
Available in XX = 19/27/30/35/40
- SATT-18-STRAND-RD**
Replacement Strand with Red LED
- SATT-18-STRAND-BL**
Replacement Strand with Blue LED
- SATT-18-STRAND-AM**
Replacement Strand with Amber LED




- WW-CC-BK-8**
Carpet to Carpet Base Black and Cover 8' Black
- WW-CC-GY-8**
Carpet to Carpet Base Black and Cover 8' Grey
- WW-CW-BK-8**
Carpet to Wall Base Black and Cover 8' Black
- WW-CW-GY-8**
Carpet to Wall Base Black and Cover 8' Grey
- WW-CW-BS-8**
Base Only, Carpet to Wall, Black, 8'
- WW-CC-BS-8**
Base Only, Carpet to Carpet, Black, 8'
- WW-TC-CL-8**
Lens Cover Only, Clear, 8'
- WW-TC-BK-8**
Lens Cover Only, Black, 8'
- WW-TC-BZ-8**
Lens Cover Only, Bronze, 8'
- WW-TC-GY-8**
Lens Cover Only, Gray, 8'



- WW-CE-BK-8**
Carpet to Edge Base Black and Cover 8' Black
- WW-CE-GY-8**
Carpet to Edge Base Black and Cover 8' Gray
- WW-CE-BS-8**
Base Only, Black Carpet To Edge, Black, 8'
- WW-TC-CL-8**
Lens Cover Only, Clear, 8'
- WW-TC-BK-8**
Lens Cover Only, Black, 8'
- WW-TC-BZ-8**
Lens Cover Only, Bronze, 8'
- WW-TC-GY-8**
Lens Cover Only, Gray, 8'




Floor to Floor Application add
BNS-TT-R-12



BS-CC-8
Wall wireway, 8' Black Base & Conduit Cover

Two Tone Bullnose Accessories




BNS-TT-R-12
Step Reducer, 12' Section




- ADH-MB-75AM-10**
Extrusion adhesive, 10.1 oz tubes, sold individually. 30 per case.
- ADH-MB-75AM-29**
Extrusion adhesive, 29 oz tubes, sold individually. 12 per case.



- ADH-IA-10.2-CA**
End Cap Adhesive, Clear liquid adhesive for end caps. 10.2 oz tubes sold individually in case of 12 each.



TM-3/16
Concrete Screw 3/16" x 1 3/4"



RONDB-1/8
Concrete Drill Bit 1/8" nail.