

CAT:

FEET:

TYPE:

PROJECT:



Self-ballasted universal voltage 120V AC or 277V AC line voltage linear wall grazing luminaire with factory standard 10 degree beam angle; TivoGraze offers the highest performance in a Graze fixture and the most consistent color binning. TivoGraze is available in high output or HD High CRI 80+ with multiple color temperature options in 1' and 4' lengths. TivoGraze is a small profile fixture with a proprietary adjustable mounting to enable easy concealment. TivoGraze continuous run connectors make it ideally suited for architectural interior applications boasting of 1300 lumens per foot and an 110lpw and can be linked up to 48 feet.

**Features**

- Self-Ballasted (110-120V AC / 100-277V AC)
- Up to 1300 lumens per foot (CCT dependent)
- Linkable up to 48'
- Flexible connectors accommodate curves.
- Dimming: TRIAC or 0-10V
- Adjustable mounting bracket

**Mounting**

Proprietary Adjustable Mounting Brackets.





**Applications**

Ideal for indirect cove and architectural applications. Designed to replace fluorescent lighting with high efficiency LED.

**Warranty**  
5 years

**Technical Information**

*Lumens/ft	1309
*Watts/ft	11.9
*Lumen/Watt	110
CRI	80
Kelvin Temp	2700K, 3500K
Rated Life	75,000 hrs.
Max run length	48'
Ordering Increment	1', 4'
Operating Voltage	100-120V AC (TRIAC), 100-277V AC (0-10V)
Dimming	TRIAC, 0-10V

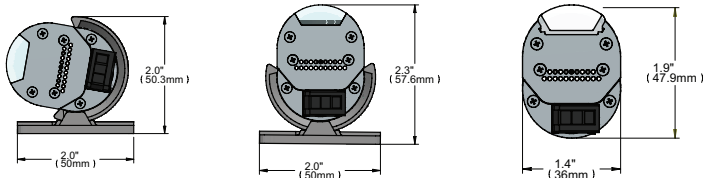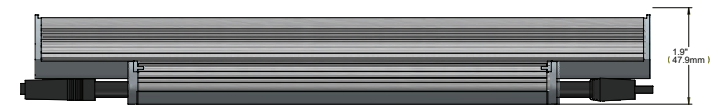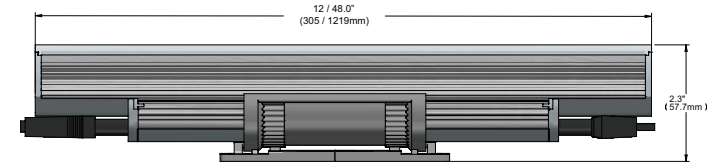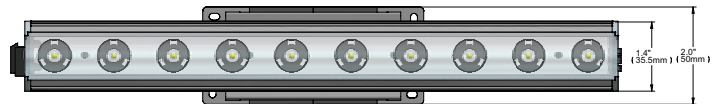**Profile Dimensions****Ordering Information**

PRODUCT CODE	BEAM ANGLE	LED TYPE	LED COLOR	DIMMING OPTION	LENGTH
TVTG	10 = 10x10	HO = High Output	27 = 2700K 35 = 3500K	01 = *TRIAC 02 = 0-10V	1 = 1' 4 = 4'

TVTG = TivoGRAZE

\* Lead Time - Consult Factory

## Recommended Dimmers

### DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)


### DIMMING -MLV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W


### DIMMING - ELV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W


## Accessories - 0-10V



**TVT-JUMPER-5P-1**  
1' Jumper, 5-Pin Connection  
**TVT-JUMPER-5P-5**  
5' Jumper, 5-Pin Connection




**TVT-TERM-5P-CAP**  
Terminator 5-Pin Cap




**TVT-PWR-5P-10**  
10' Power Cable, 5-Pin Connection


## Accessories - TRIAC



**TVT-JUMPER-3P-1**  
1' Jumper, 3-Pin Connection  
**TVT-JUMPER-3P-5**  
5' Jumper, 3-Pin Connection



**TVT-TERM-CAP**  
Terminator Cap



**TVT-PWR-3P-10**  
10' Power Cable, 3-Pin Connection