tivoli®

Discontinued

LITESPHERE

ADAPT

GINA

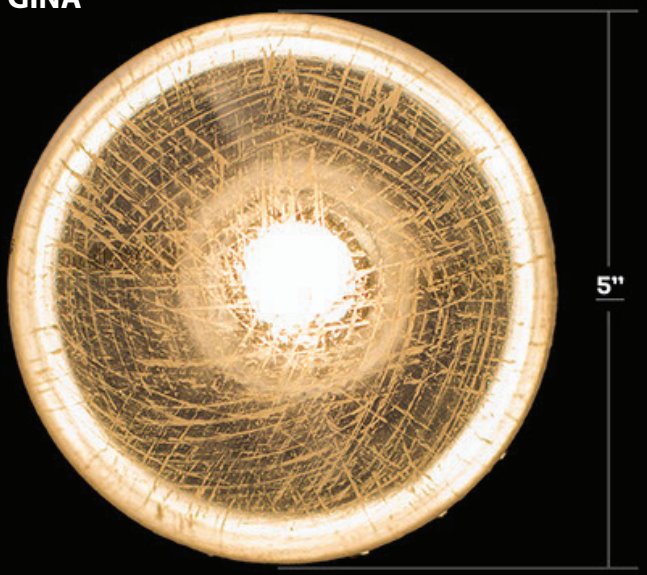

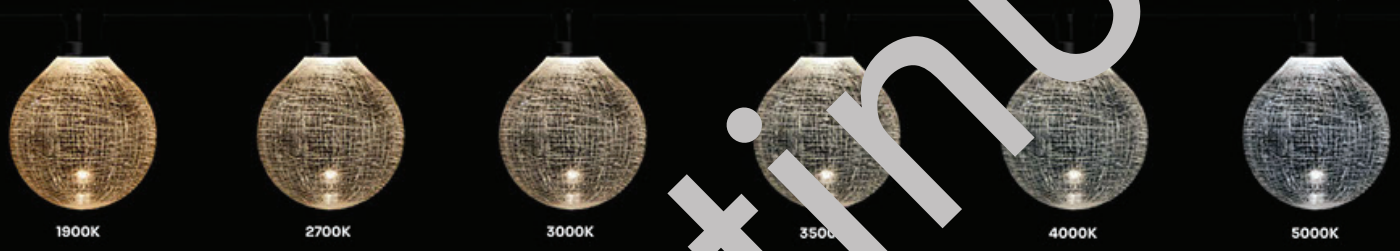

KATIE

Discontinued

ANGELA

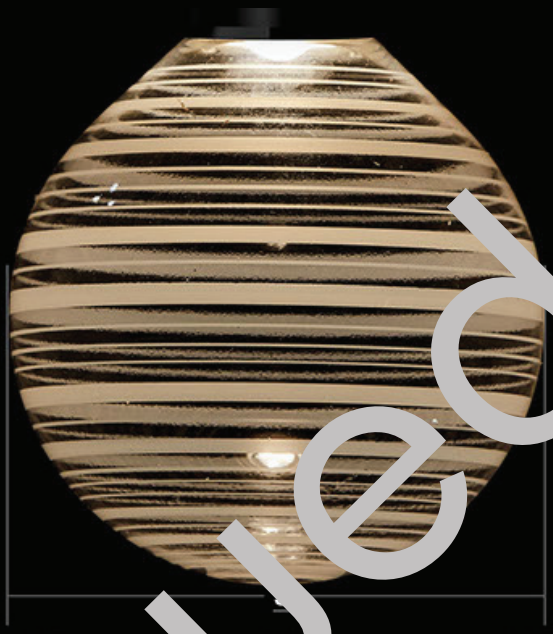

GABY

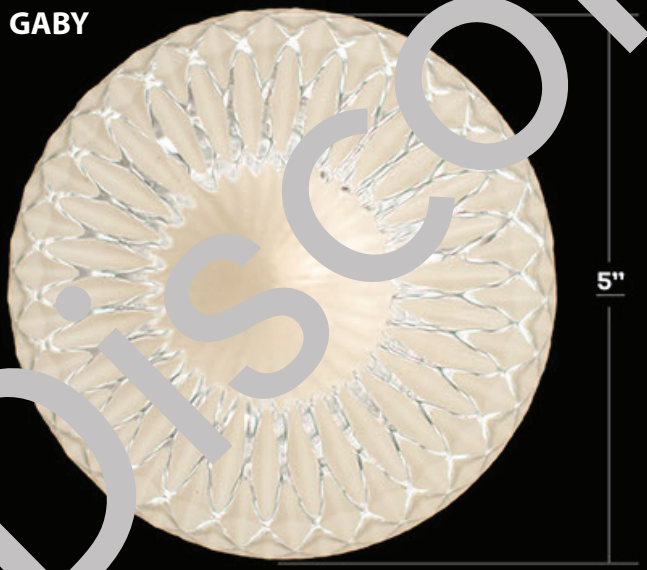

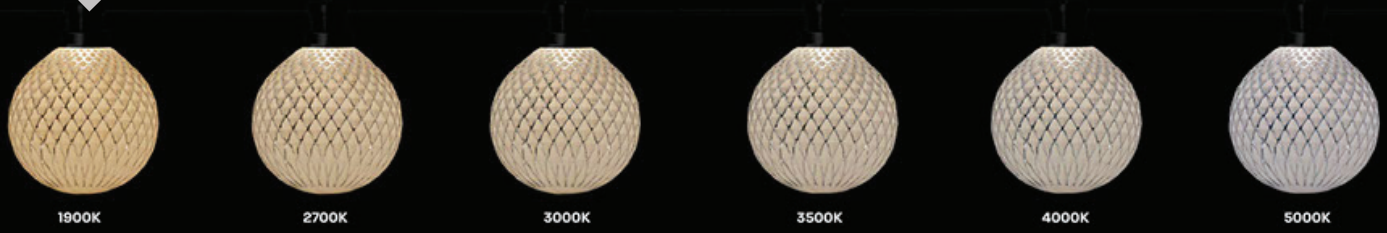

Discontinued

TONI

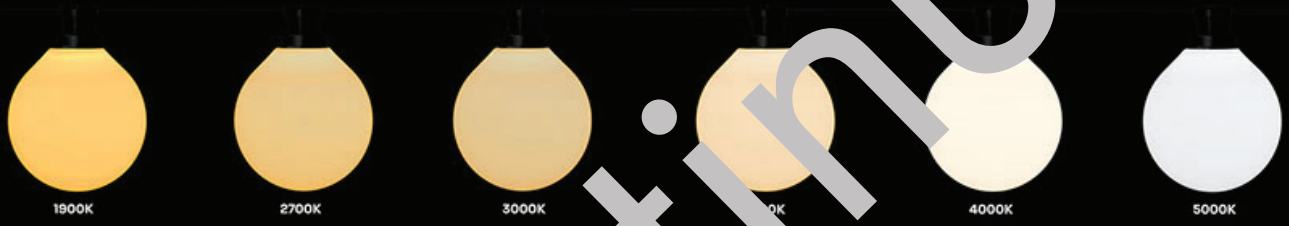

VICTORIA

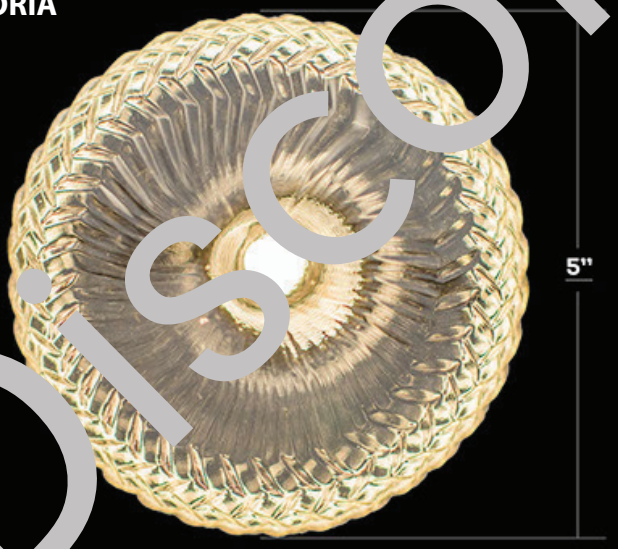

Discontinued

LAURA

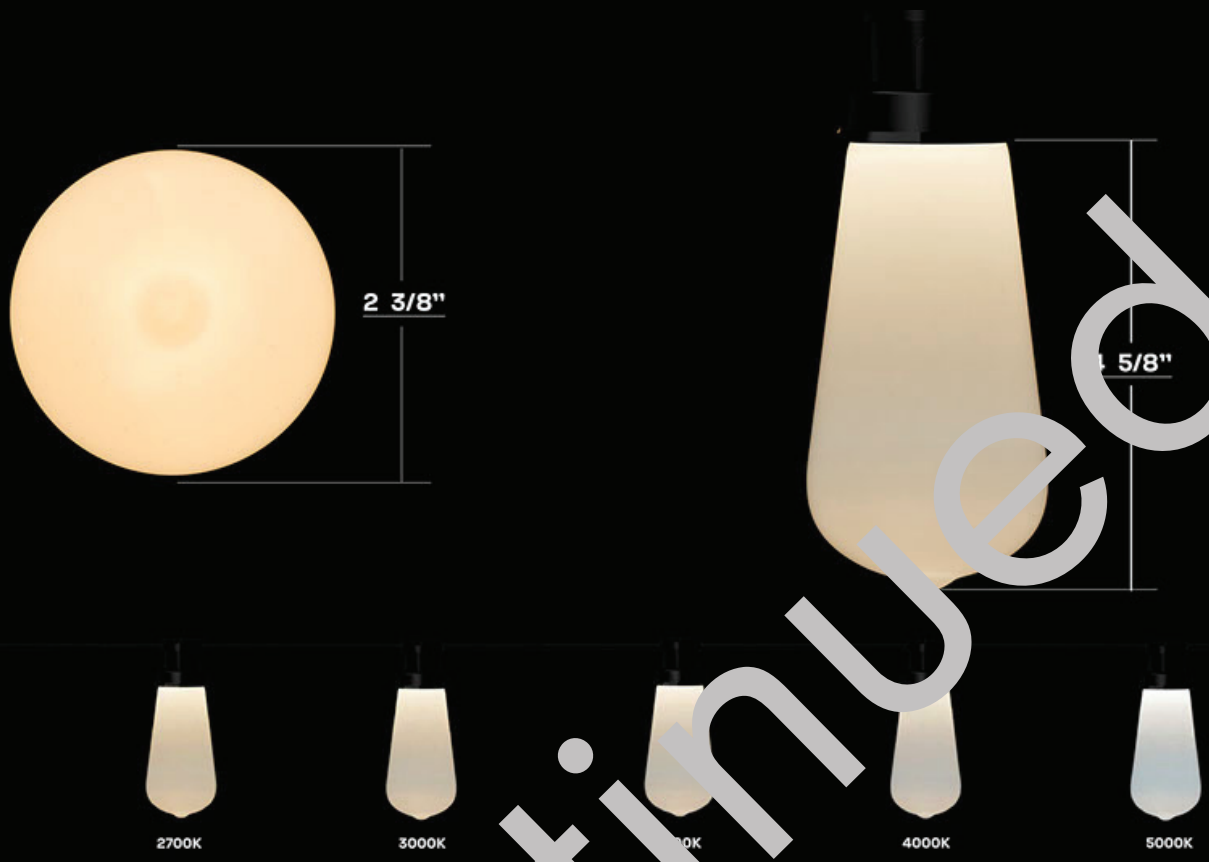

BRENDA

Discontinued

LUCIA

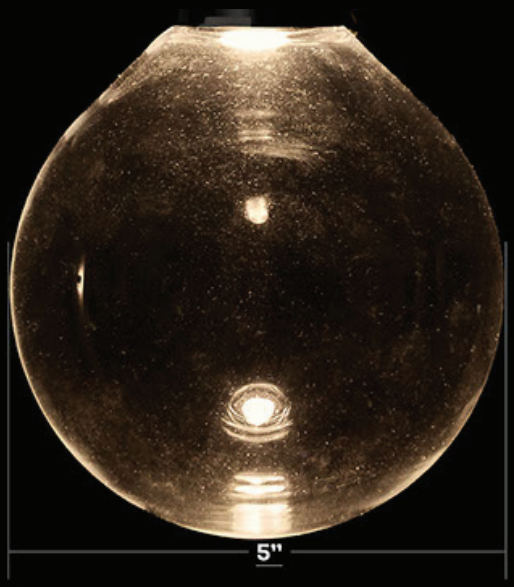

SUSAN

Discontinued

ANA

Discontinued

Project: _____ TYPE: _____

Discontinued

Product Features

- 12V Low voltage system
- Socket and cord color available in black or whit
- 5 standard spacing options and custom spacing [illegible]iable
- Proprietary Litesphere screw base adapter
- Silicone-coated helps with shatter resistant AD[illegible]PT glas[illegible]are
- Built to withstand temperatures ranging fro[illegible] -40[illegible]to 65°C
- Fitted O-Ring
- IP65
- cULus listed
- 3 Year warranty

Dimensions

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Order Guide

Product	Wire	Spacing	LED Type	CCT	Globe	Voltage
LSA -	_____ -	_____ -	_____ -	_____ -	_____ -	_____
Litesphere Adapt	**B** Black **W** White	**CS** Custom Spacing	**V** Very High Output	**19** 1900K **27** 2700K **30** 3000K **35** 3500K **40** 4000K **50** 5000K **AM** Amb[illegible] **RD** [illegible]d **RB** Roy[illegible] Blue **GN** Gr[illegible]en **YL** Yellow	**ANA** Clear Glass Globe Style: Ana **VIC**** Clear [illegible]ss Glob[illegible] Styl[illegible]ictoria **GAB** Opa[illegible]lass [illegible]obe Styl[illegible]y **BRE** [illegible]ronze C[illegible]ge [illegible]: Brenda **LA[illegible]**** Opa[illegible]ass Vintage Styl[illegible]aura **[illegible]IN** [illegible]ched Glass Globe Style: Gina **AN** Striped Glass Globe Style: Angela **KAT** Frosted Glass Globe Style: Katie **SUS**** Clear Glass Globe Style: Susan **TON**** Frosted Glass Globe Style: Toni **LUC**** Clear Glass Globe Style: Lucia **CG*** Varied Globes	12[illegible]DC

**Consult Factory for MOQ and Lead Time.

*Varied Globes - Use individual ADAPT globe part numbers with quantity to match your total ordered socket count. All ADAPT globes come uninstalled.

Lengths & R[illegible]r Order C[illegible]e

Tivoli manufactures Litesphere to your specified lengths. Individual lengths and runs must be specified at time of ordering. (see chart below for ordering details)

Lengths and r[illegible]
[illegible]below for o[illegible]ing examp[illegible]

_____ - _____

L_____ [illegible]ngth in [illegible]et
[illegible]Max Run

Quantity

Lead Wire Options **(REQUIRED)**

2 foot lead wire

LS-EP - _____
B Black
W White

+

If extra lead wire is needed please add below part number

LS-XEP - _____ - _____

_____
B Black
W White

Length in feet (18ft max)

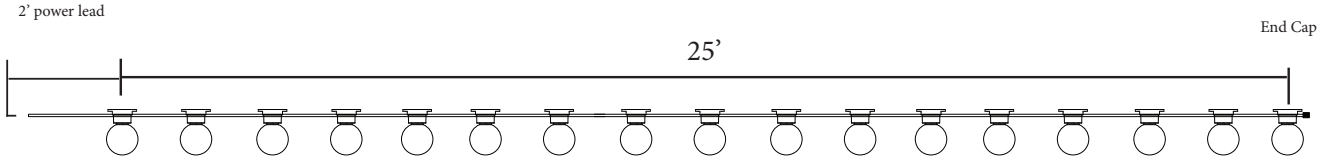

With the example above, you will receive 3 runs at 25' and a standard factory 2' power lead with black or white wire

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Specifications

Output (Based on 5000K VHO Chip in Lucia Globe)	
Kelvin Temperature	1900K, 2700K, 3000K, 35000K, 4000K, 5000K, Amber, Red, Royal Blue, Green, Yello
Watts/ft.	0.96
Lumens/ft.	73
Electrical	
Input Voltage	12V DC
Control	
Dimming	DMX, 0-10V, ELV, MLV, TRIAC
Physical	
Dimensions	6 1/8"W x 5"H, 7 1/4"W x 2 3/8"H
Socket Housing	PVC
Globe	Glass (Shatter resistance assist with silicone coating - Gl till break in conditions)
Mounting	Surface Mount, Suspended
Operating Temperature	-40°C to 65°C (-40°F to 149°F)
Certification and Testing	
Certification	cULus
Environment	Wet Location
IP Rating	IP65
Warranty	3 Years

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Controls & Software



Touchscreen

TVOQ-1-WH
WH (White only)
512 DMX channel, 16 scene,
4 zone, glass touch screen

Touchscreen

TVOQ-10-XX-7
XX = BK (Black), WH (White)
1024 DMX channel, 500 scene,
10 zone, glass touch screen

Touchscreen

TVOQ-2-XX-7
XX = BK (Black), WH (White)
512 DMX channel, 99 scene,
1 zone, glass touch screen

Cue™ and CuePro™ softwares are specifically designed for the Tivoli™ in-wall DMX controls and includes an array of tools required by the latest DMX lighting fixtures. Intuitive, with easy-to-use effects that can be dropped into timelines, and multi-zone synchronization capabilities allow you to program project effortlessly.

Mounting Accessories

LS-CABLE-60 Catenary Cable Kit - 60'
(1/8" galvanized cable includes cables for use with loads up to 200lbs)

LS-CABLE-110 Catenary Cable Kit - 110'
(1/8" galvanized cable includes cables for use with loads up to 200lbs)

LS-CABLE-500 Catenary Cable Kit - 500'
(1/8" galvanized cable for use with loads up to 200lbs)

LS-LOCK-X Cable Lock
X = **2** (2 Locks), **4** (4 locks) Includes (1) cable release key. Cable Lock for 1/8th inch cable, Heavy-duty lockable fasteners support loads up to 200 lbs. Can be easily adjusted without the use of tools.

LS-TT
Catenary Cable Tensioning Tool up to 880lbs with minimal effort due to the 6:1 gear drive mechanism. Integral torque gauge controls the load applied to the wire, giving consistent tension every time and optimizing the life of the wire.

LS-UVZP-BK-50 UV Zip Ties
50 pc Bag set. UV resistant, heavy duty ties.
Maximum weight up to 100 lbs./per tie.

LS-UVZP-BK-30 UV Zip Ties
30 pc Bag set. UV resistant, heavy duty ties.
Maximum weight up to 100 lbs./per tie.

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Shades

HAT



SHADE-HT-BK-BK-8
Light Shade - HAT
8.3" Black Top, Black Bottom

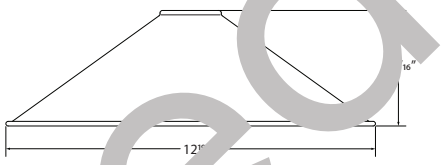

SHADE-HT-BK-BK-13
Light Shade - HAT
12.6" Black Top, Black Bottom

***SHADE-HT-BK-CO-13**
Light Shade - HAT
12.6" Black Top, Copper Bottom

*Contact factory for lead time and MOQ

DISH



SHADE-DS-BK-BK-10
Light Shade - DISH
10.2" Black Top, Black Bottom

FLOWER

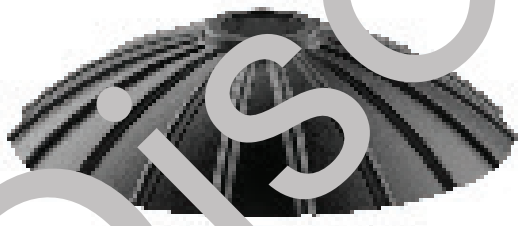



SHADE-FL-BK-BK-10
Light Shade - FLOWER
9.8" Light Shade , Black Top, Black Bottom



SHADE-FL-BK-BK-13
Light Shade - FLOWER
13.8" Light Shade, Black Top, Black Bottom

Accessories

SHADE-ADP-LSL-BK-01 Litesphere Light Shade Adapter
PVC Black Adapter - Sold individually. Includes (1) Adapters, (1) Adapter bracket, (2) set screws and (1) Allen Key

SHADE-ADP-LSL-BK-10 Litesphere Light Shade Adapter
PVC Black Adapter Kit - Sold in packs of 10. Includes (10) Adapters, (10) Adapter bracket, (20) set screws and (1) Allen Key

SHADE-ADP-LSL-BK-25 Litesphere Light Shade Adapter
PVC Black Adapter Kit - Sold in packs of 25. Includes (25) Adapters, (25) Adapter bracket, (50) set screws and (1) Allen Key

SHADE-ADP-LSL-BK- 50 Litesphere Light Shade Adapter
PVC Black Adapter Kit - Sold in packs of 50. Includes (50) Adapters, (50) Adapter bracket, (100) set screws and (1) Allen Key

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Replacement Parts

LSA Globes: All ADAPT replacement globes come with (1) foam washer each.

Shatter Resistant Silicone Coating

G125 Globe

Gina
LSA-GIN

Victoria*
LSA-VIC

Ana
LSA-ANA

Gaby
LSA-GAB

Angela
LSA-ANG

Katie
LSA-KAT

G125 Globe

Susan*
LSA-SUS

Toni*
LSA-TON

[illegible]*
LSA-[illegible]C

[illegible] Globe

Brenda
LSA-BRE

Laura*
LSA-LAU

*Consult Factory for MOQ and Lead Time.

VERY HIGH OUTPUT
VHO wedge base LED chip
(Sold Each)

LSL-19-V-12
12V Wedge base
1900K
LSL-27-V-12
12V Wedge base
2700K
LSL-30-V-12
12V Wedge base
3000K
LSL-35-V-12
12V Wedge base
3500K
LSL-40-V-12
12V Wedge base
4000K
LSL-50-V-12
12V Wedge base
5000K
LSL-AM-V-12
12V Wedge base
Amber
LSL-RD-V-12
12V Wedge base
Red
LSL-RB-V-12
12V Wedge base
Royal Blue
LSL-GN-V-12
12V Wedge base
Green
LSL-YL-V-12
12V Wedge base
Yellow

LS-HANG-CLIP
Hanger clip for installation from 8 gauge stainless steel aircraft cable (Sold Each)

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Power Supplies

ADNM - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-60-1-5-12-D	Indoor / Outdoor	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADNM-80-1-5-12-D				1	60W	5A
	ADNM-150-2-5-12-D				2	2x60W	2x5A
	ADNM-240-3-5-12-D				3	3x60W	3x5A
	ADNM-320-4-5-12-D				4	4x60W	4x5A

ADNM - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-60-1-5-12-DOT	Indoor / Outdoor	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADNM-80-1-5-12-DOT				1	60W	5A
	ADNM-150-2-5-12-DOT				2	2x60W	2x5A
	ADNM-240-3-5-12-DOT				3	3x60W	3x5A
	ADNM-320-4-5-12-DOT				4	4x60W	4x5A

ADNM - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-60-1-5-12-DIN	Indoor / Outdoor	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADNM-80-1-5-12-DIN				1	60W	5A
	ADNM-150-2-5-12-DIN				2	2x60W	2x5A
	ADNM-240-3-5-12-DIN				3	3x60W	3x5A
	ADNM-320-4-5-12-DIN				4	4x60W	4x5A

ADNM - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 50/60 Hz	12V DC	2	2x60W	5A
	ADNM-240-3-5-12-din-3				3	3x60W	3x5A

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Power Supplies

INFINITY - MLV / ELV / 0-10V / PWM / TRIAC

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRC CAPACI
Infinity Series Class 2 Transformer	INF-J-30-1-2.5-12	Indoor / Outdoor	100 - 277V AC	12V DC	1	30W	3W	2.5A
	INF-J-60-1-5-12				1	60W		
	INF-J-180-3-5-12				3	3x60W	3x	3x5A
	INF-J-300-5-5-12				5	5x60W	x6W	5x5A

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.