Project: _____ Type: _____

- Non-intrusive, glare-free illumination
- improved LED guide lighting of aisles and steps wi[illegible]e-lit LED
- Multiple mounting applications - wall, standard se[illegible]t and [illegible]er flat surfaces
- Suitable for new construction and renovation
- Larger numerical or letter size for row indicator

Dimensions

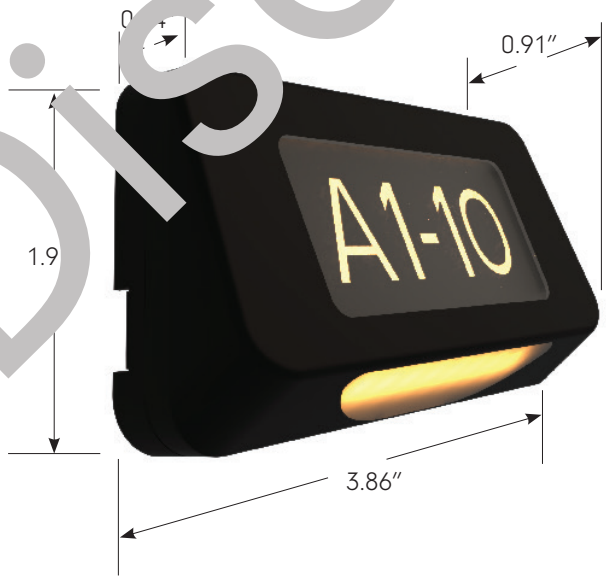

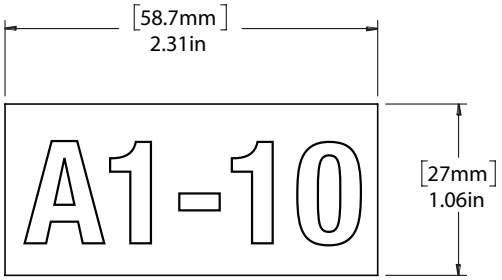

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Order Guide

PRODUCT CODE		*MOUNT STYLE		LED COLOR		ROW INDICATOR OPTION		*ROW INDICATOR STYLE
MOD2	-		-		-		-	
MOD2 = Mode 2.0 Seat Light		**R** = Rear Mount **W** = Wall Mount		**30** = 3000K **27** = 2700K		RI = Row Indication Row indicator option requires written details with order		**01** = 5 Characters **02** = Graphics and 4 characters

Mount Style:
R = Includes 48" FLex Conduit
W = Includes 1" Flex Conduit

Note: Leave blank if not required.

*Row Indicator Style

Use the window diagrams below to specify character requirements. Standard font uses Helvetica Condensed. Custom font styles are available, please note font at time of order.

01 STYLE

Up To 5 Characters

02 STYLE

*Image and Up To 4 characters

Specification

Electrical (based on 3000K)	
Lumens	178
Watts	0.37
*Lumens/watt	49
CRI	90
Kelvin Temp	2700K, 3000K
Dimmable	MLV /ELV /DMX /0-10V/TRIAC
Operating Voltage	12V DC
Certification and Testing	
Certification	cETLus
Environment	Damp Location
Rated Life	75,000 hrs.
Warranty	5 years

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Mounting Accessories



JBOX-LP
Junction box, low profile



BS-CC-8
Wall wireway, 8' Black Base & Conduit Cover

BSL-PC-1/4
0.25" Flex Conduit, Blackv

S-CLA
x Conduit c mp. Fits 0.25" Fl onduit

Replacement Parts

MOD2-COVER
Replacment cover plate

MOD2-COVER-RI-X
Replacment cover plate ith Row Indica
XX = **27** 00K), **3** 000K)

In-Wall Controls

Q-1-WH
Wh



TVOQ-10-XX-7
XX = **BK** (Black), WH (White)

TVOQ-2-BK
Black

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Power Supplies

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-D	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-D				2	2x60W	2x5A
	ADUL-240-3-5-12-D				3	3x60W	
	ADUL-320-4-5-12-D				4	4x60W	

ADUL - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DOT	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DOT					0W	2x5A
	ADUL-240-3-5-12-DOT				3	3x60W	3x5A
	ADUL-320-4-5-12-DOT				4	4x60W	4x5A

ADUL - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DIN	Indoor / Damp	100-277V 50/60 H	12V DC	1	60W	5A
	ADUL-150-2-5-12-DIN				2	2x60W	2x5A
	ADUL-240-3-5-12-DIN				3	3x60W	3x5A

ADUL - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-150-2-5-12-DIN-2	Indoor / Damp	V AC 50/60 HZ	12V DC	2	2x60W	2x5A
	ADUL-240-3-5-12-DIN-3				3	3x60W	3x5A
	ADUL-320-4-5-12-DIN-4				4	4x60W	4x5A

INFINITY - MLV / ELV /

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
inity Series ass 2 Transformer	F-J-30-1-2.5-12	Indoor / Outdoor	100 - 277V AC	12V DC	1	30W	3W	2.5A
	0-1-5-12				1	60W	6W	5A
	INF-J-18 12				3	3x60W	3x6W	3x5A
	INF-J-300-5-5-12				5	5x60W	5x6W	5x5A

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)

DIMMING - MLV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				4[illegible]
	M-1000				800W

DIMMING - ELV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	AC	450W
	DE-300				300W

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.

TwoTone Bullnose & Accessories



BNS-XXX-GY-12
XXX = **TT** (black/gray), **TT2** (black/2″gray), **SC** (solid gray)
TwoTone Bullnose, 12′ length



BNS-TT-EC-X
X = **L** (left side), **R** (right side)
Bullnose Overlap End Caps, black



BNS-CC-TT-EC-X
X = **L** (left side), **R** (right side)
Bullnose Carpet to Carpet End Caps, black



BS-C 8
Wall ay, 8′ bl base & nduit



BNS-TT-R-12
Step Reducer, 12′ section



STP-EXTNDR-12
Bullnose Step Landing Tread Extender, 12′

-MB-75A X
XX 10 (10.1 c bes, **30** per case.), (29 oz tubes **12** per ase)

ADH-IA-10.2-CA
End cap clear liquid adhesive, 10.2 oz tubes sold individually, 12 per case



WW-XX-XX-8
XX = **CC** (Carpet to Carpet ba)
CW (Carpet to Wall base)
XX = **BK** (black lense),
GY (gray lens)
Base and Cover Co bo, 8′ le gth

W-XX-BS-8
X CC (Car to Carpet),
CW Wall)
Base O ly, black, 8′ length

WW-TC-XX-8
XX = **CL** (clear) **BK** (black), **BZ** (bronze), **GY** (gray)
Top Cover Wire Way lens, 8′ length



TM-3/16
Concrete Screw 3/16″ x 1 3/4″

WW-CE-XX
XX = **BK** (black), **GY** (gray)
Carpet to Edge Base and Cover Combo, 8′ length



WW-CE-BS-8
Base Only, Carpet To Edge, black, 8′ length

RONDB-5/32
Concrete Drill Bit 5/32″

Discontinued

Tivoli, LLC. reserves the right to modify this specification without prior notice.
Copyright © Tivoli 09/23/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458