

Please verify the contents of the packages!

Please read instructions entirely before starting installation

Be sure power is turned off before installing or modifying the system

Call Tivoli, LLC tech support with questions

Caution: Usher™ Wall is designed to work with listed **Class 2 12V DC transformers only**. Use of any other power source will cause damage, shorten the life of the fixture and void the warranty.

Consult any and all applicable local and national codes for installation.

Do not conceal or extend exposed conductors through a building wall as per local electrical code.

Warning: With any luminaire for any application, basic safety precautions should always be followed to reduce the risk of fire, electric shock and personal injuries. This lighting system should be installed by a certified professional.

Installation Instructions



Preliminary

Usher™ Wall Light is delivered with Titanium LED Strand pre-installed. Mounting holes are pre-drilled at the factory and are spaced about 18" apart. Usher™ Wall Lighting System is available in 4' and 8' lengths and may be cut to size in the field. Trim Base and Lens to fit location. Cut off modules to fit if components are field cut. Use Butt Connectors to re-connect wire that has been cut in the field. See Joiner Cover options on page 5 to cover corners and gaps between fixtures. Conduit and junction boxes should already be in place in wall before installing Usher™ Wall Lighting System. See Wiring options on Page 4.

Important: Become familiar with the spacing requirements for each type of Joiner Cover before starting installation. See Spacing Requirements section for detailed information (Page 2).

Installing the Base Sections

Step 1: Usher™ Base should be installed 10-14" above floor. Begin by snapping a chalk line along the wall using the dimensions shown in the diagram below.

Step 2: Align the bottom of the Usher™ Base Section with the chalk line and use the chalk line to determine where to cut the Base Sections to fit.



Note: Include space for Joiner Brackets and End Caps before starting to install Base Sections (See Spacing Requirements Section).

Step 3: Drill 5/16" feed hole at start of run to route lead wire through wall, as shown. Hole must align with conduit already located in wall.

Step 4: Secure Base to wall with 1 1/2" Pan-Head Walldog fasteners (provided).

Note: Occasionally, a mounting surface will require metal screws. Self-Drilling Metal Screws are available from Tivoli® as an option. Request Part Number **TM-2-3/8**.

Caution: When attaching base to wall, do not overtighten screws.

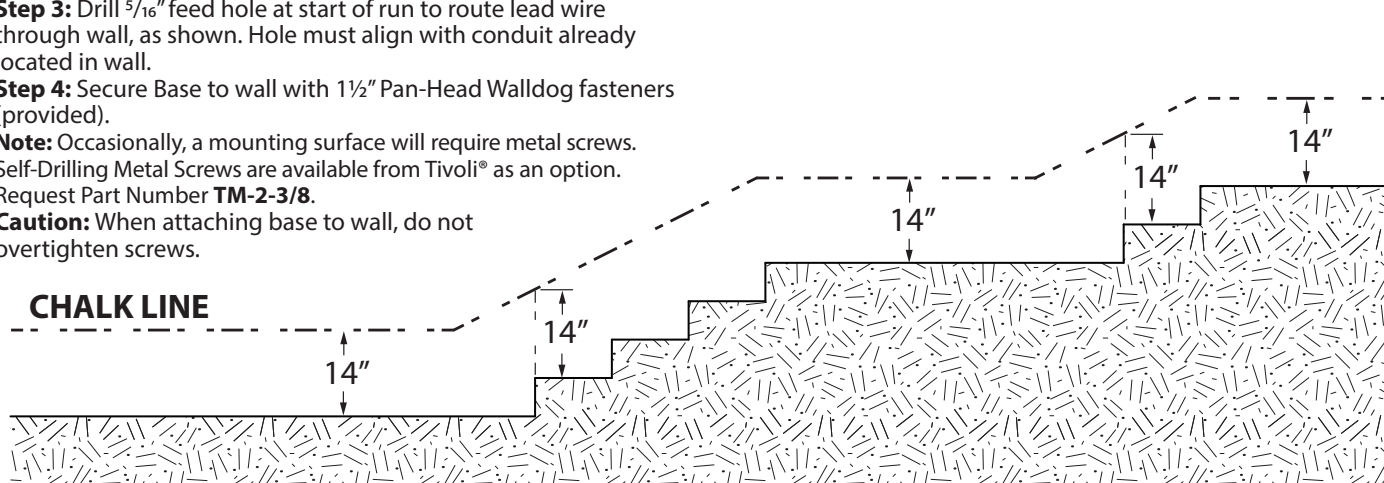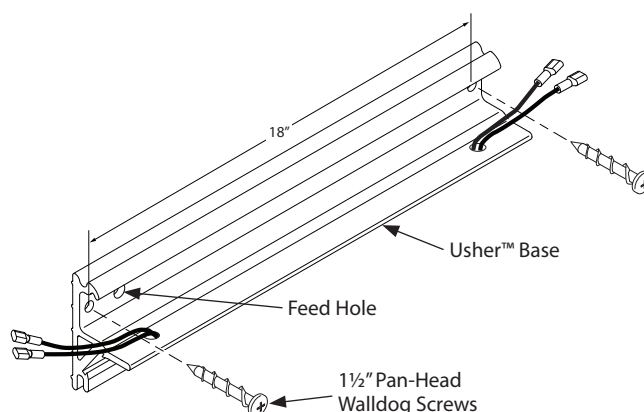


7120008

Spacing Requirements for Multiple Base Section Installation


Inline Base Position

Step 5: To install multiple Base Sections in a line, butt each section against the end of the previous section.

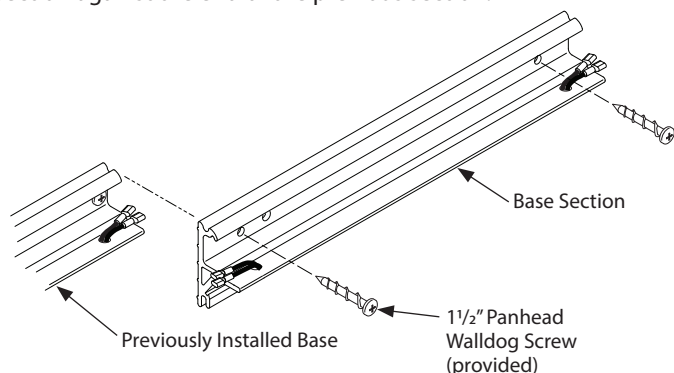


Downward Angle Base Position

Step 8: Install downward angled Base Sections at a 30°-35° angle to accommodate the downward Joiner Covers. Leave a 1/4" gap between the lower edge of both base sections.

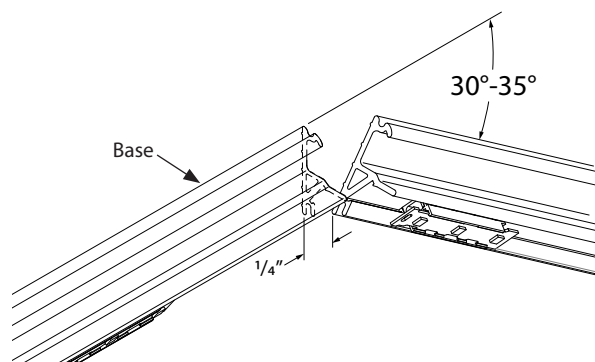


Upward Angle Base Position

Step 6: Install upward angled Base Sections along stairways. Base Sections may be positioned at a 30°-35° angle to accommodate the Angled Joiner Covers. Leave a 1/4" gap between the top edge of Base Section and the top edge of the previously installed Base.

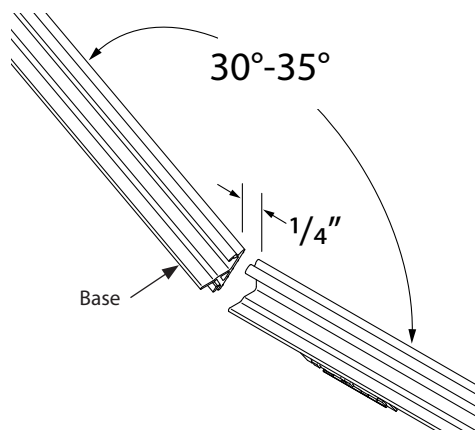


End Cap Position

Step 9: If the project calls for End Caps at the ends of the run, leave a 1/2" space at the end of the run to provide space for the End Cap.

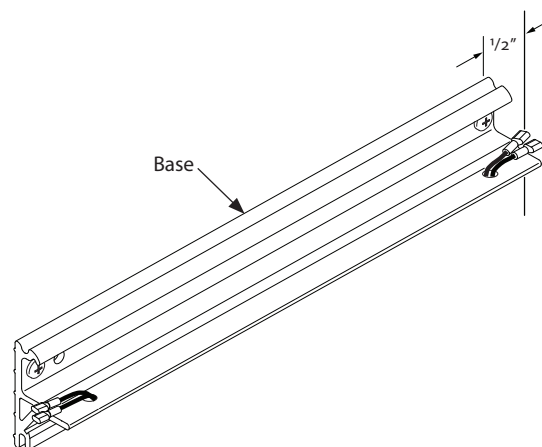


Outside Corner Position

Step 7: When two channels meet at an outside corner, use Outside Corner Covers to conceal the gap between sections. Position each Base along the edge of the corner. No additional gap is necessary to use this cover.

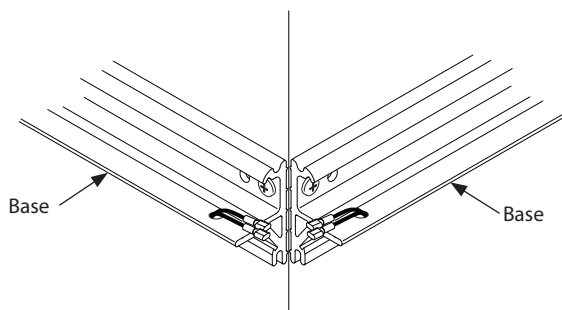

Inside Corner Position

Step 10: When two channels meet at an inside corner, use an Inside Corner Cover to fill the gap between sections. Leave a 3/4" space from the end of each channel to the inside corner to make room for the Inside Corner Bracket.

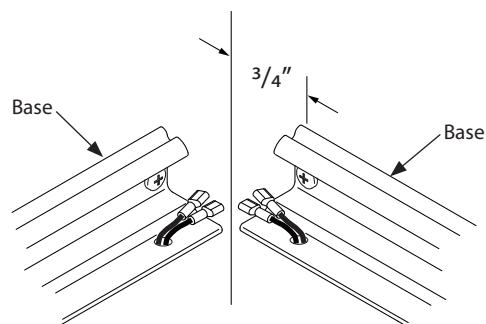



Wiring the System



Overview

The Usher™ Wall unit is supplied with male and female spade connectors attached at wire ends to facilitate interconnection of fixtures. Connect multiple fixtures by joining male and female spade connectors together. Attach lead wires from unit to power cables using mating male and female spade connectors (18-22ga). Alternatively, the connectors may be cut off to allow the wires to be joined together using wire nuts. Maintain polarity by following the positive and negative identification labels on each wire. The smooth wire is Positive (+) and the ribbed wire is negative (-). The available 24" jumper wire may be used to connect the fixture to the power supply.

Step 1: Drill a 5/16" hole through the base near the lead end of the Fanatasma™ Base to align with the end of the conduit, which should already be located in the wall (See Page 1).


⚠ WARNING! Danger of Electrical Shock. Be sure power is turned off before proceeding.

Step 2: Run wire to Junction Box and make connections using compatible spade connectors or wire nuts. See Page 4 for wiring options.

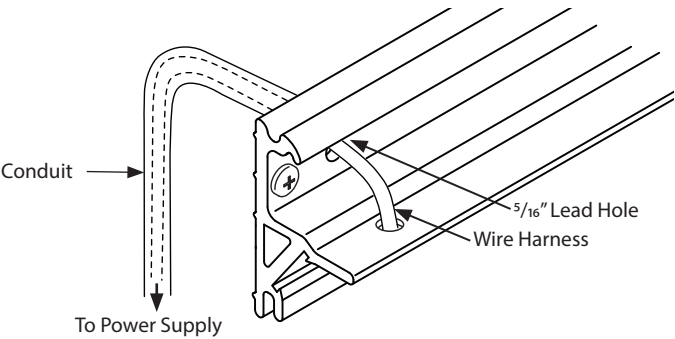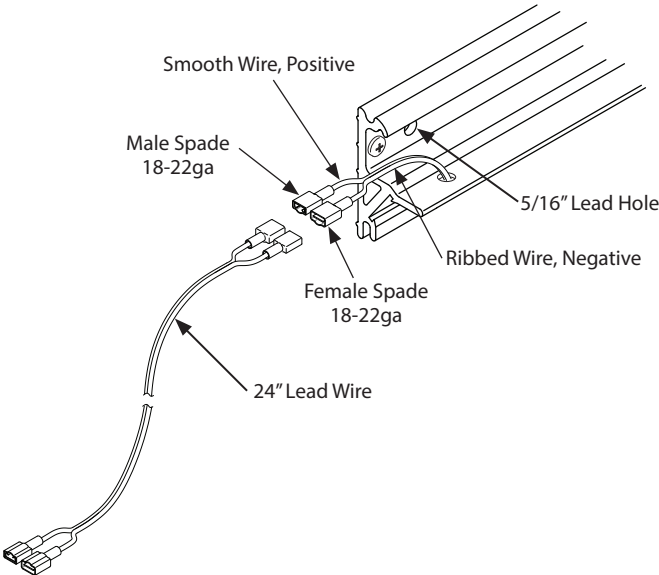


Product Specification Guide		
Fanatasma Wall	Watts per Foot	Max Linear Run
1900°K-4000°K	0.40	65'
Red	0.27	80'
Blue	0.58	55'
Amber	0.6	55'

Wiring Options

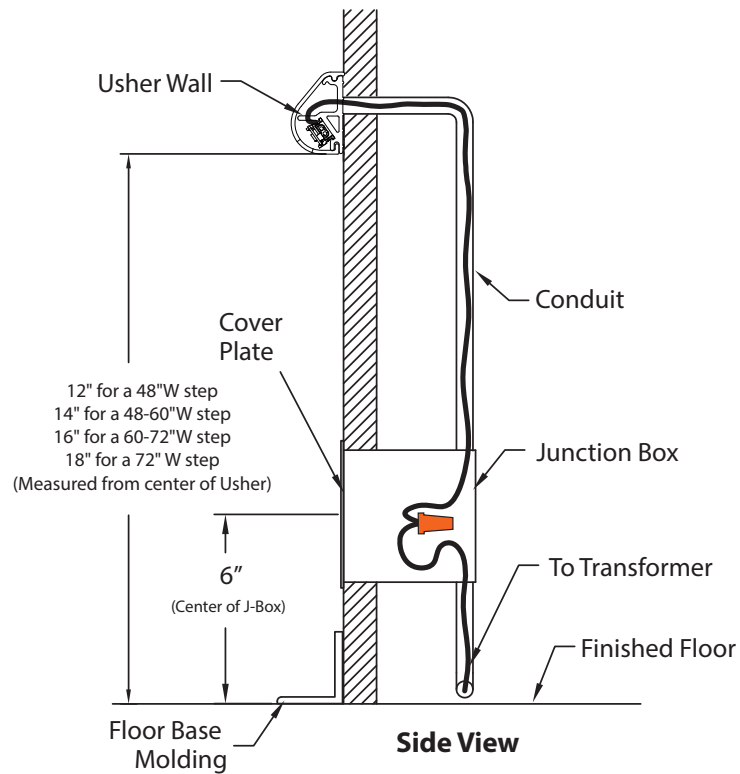


Usher™ Wall Light and J-Box Mounting Height

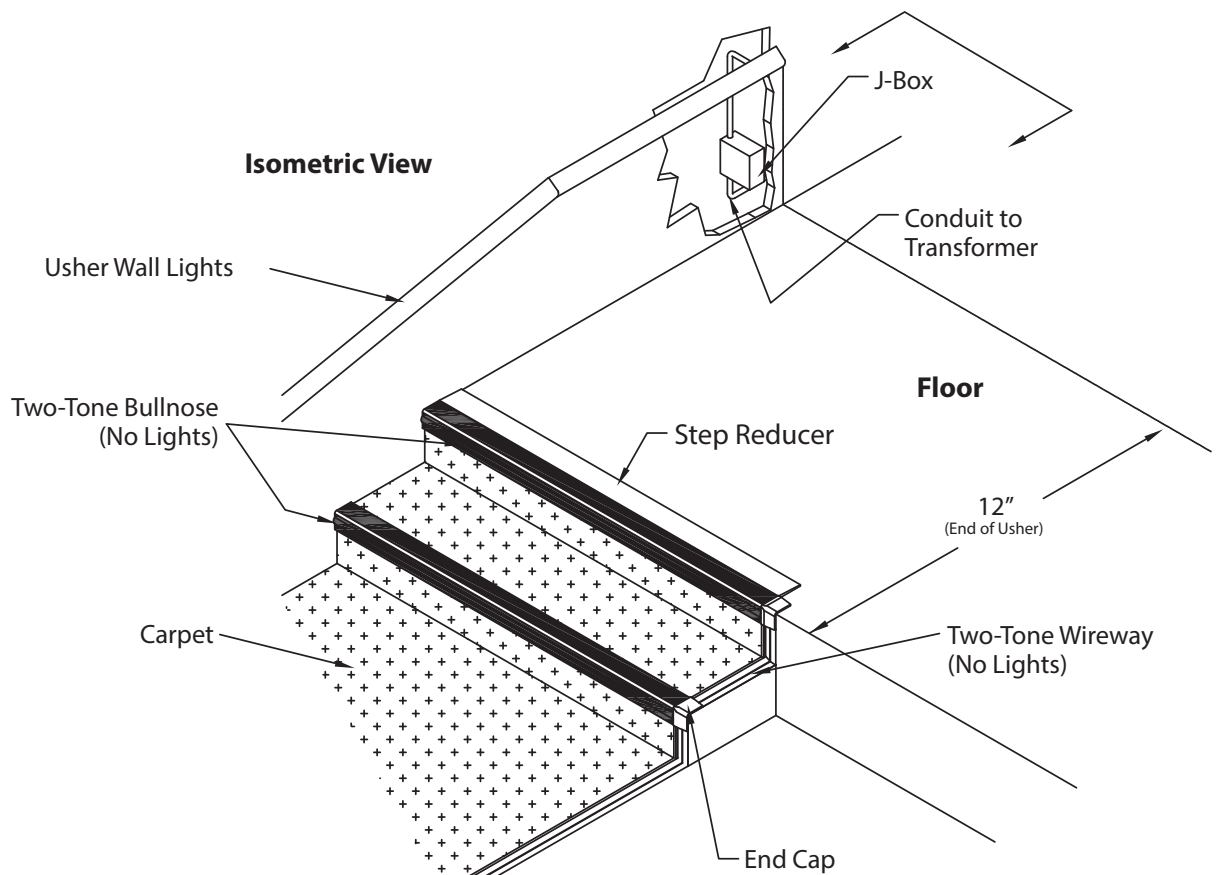

Install Usher Lens


Step 1: Insert raised Tab at lower edge of Lens into slot in bottom of Usher™ Base.

Step 2: Rotate Lens upward and press against top of Base until it snaps over the ridge at the top of the Base.

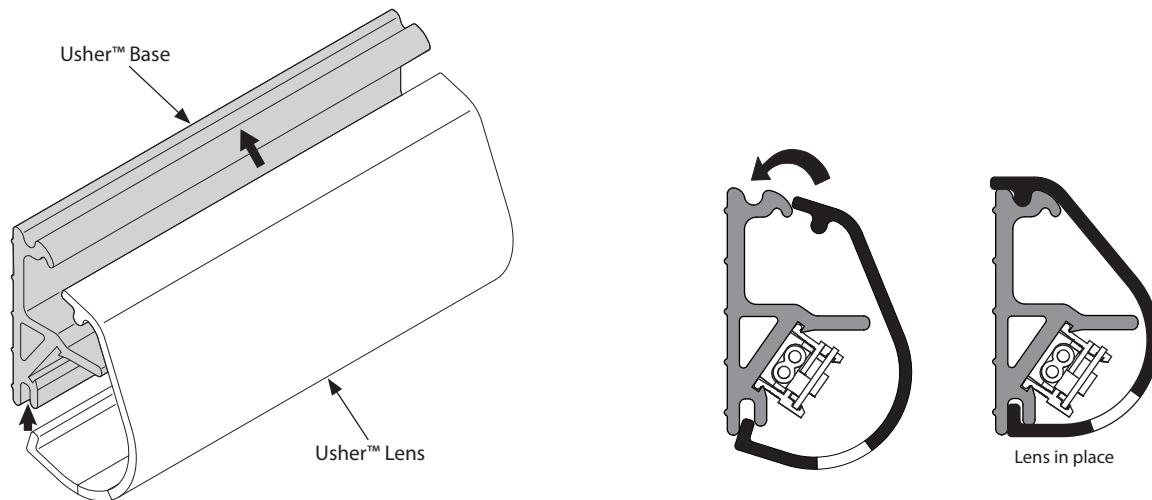


Usher™ Corner Elbows and Angled Brackets


Usher™ Joiner Covers hide the gap between fixtures where they meet at corners or angles. Install Usher™ Wall Lighting sections first and place Joiner Covers over the gap as shown. Secure to wall with 1½" Pan-Head Walldog Screws (provided).

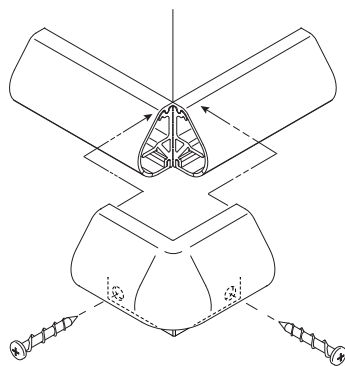


Outside Corner Cover

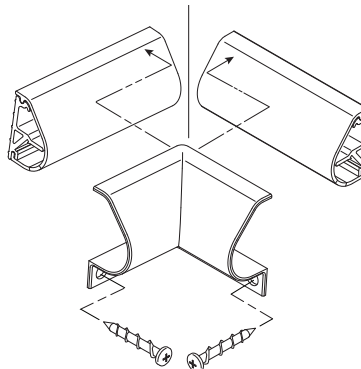


Inside Corner Cover

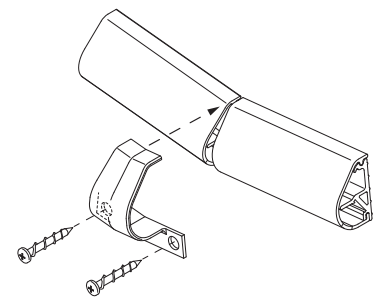

Upward Angle Joiner Cover

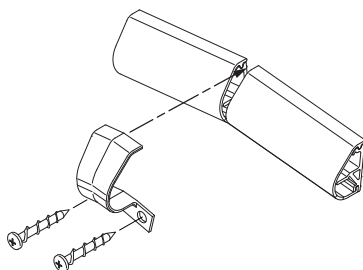


Downward Angle Joiner Cover




End Cap

Usher™ Lens Removal Procedure


Step 1: Remove End Cap, if used.

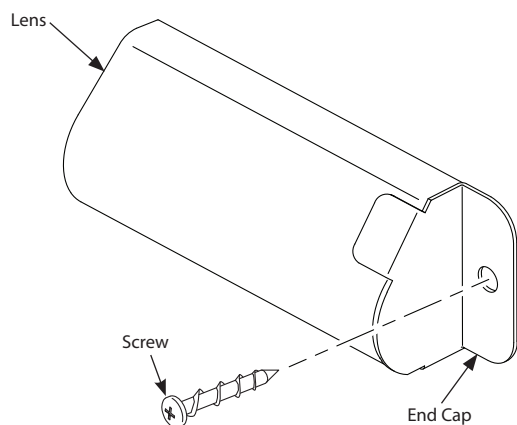


Step 2: Insert screwdriver blade behind Lens at one end of the Lens and twist screwdriver to pry end of lens away from the Base Channel. Use this method if the lens is at the end or in a middle position.

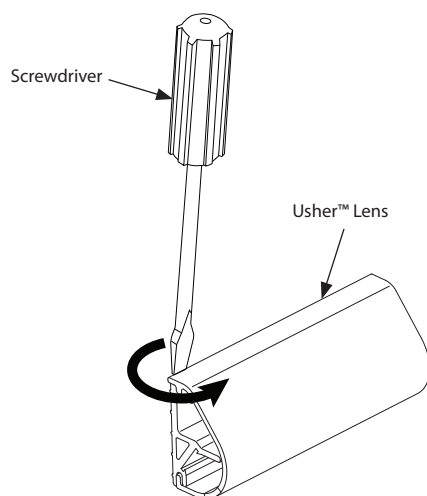

Step 3: Slide blade of screwdriver along top groove of channel to finish removing the top edge of the lens.

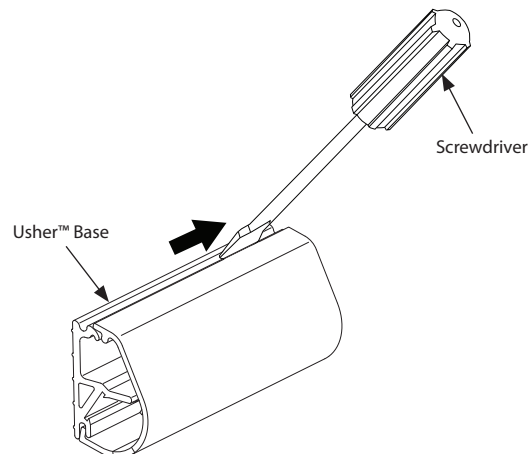


Step 4: Position the blade of the screwdriver between the bottom surface of the lens and the lower edge of the channel and pry in a downward motion. The Lens will pop off the lower groove of the Base Channel.

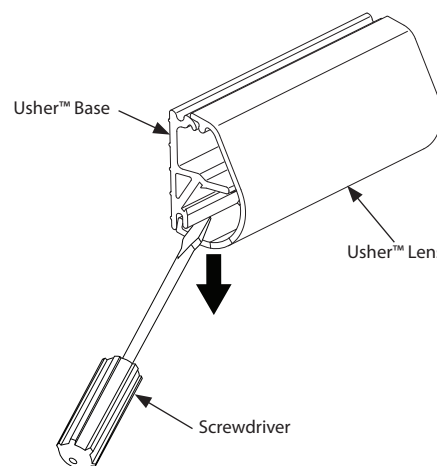

Removing and Installing the LED Board


Step 1: Slide board to the left as far as it will go. Insert a pointed object, such as a pen tip, into the slot at the end of the LED board to slide it more easily.

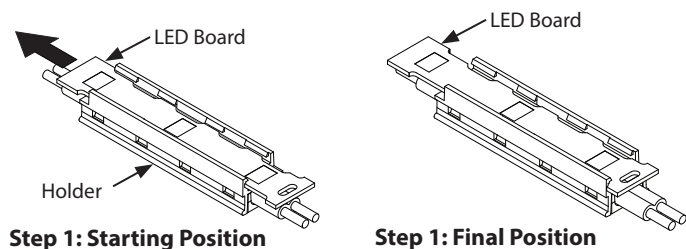

Step 2: Rotate top edge of board upward, as shown.

Step 3: Remove board.

Installation: Reverse steps to install.

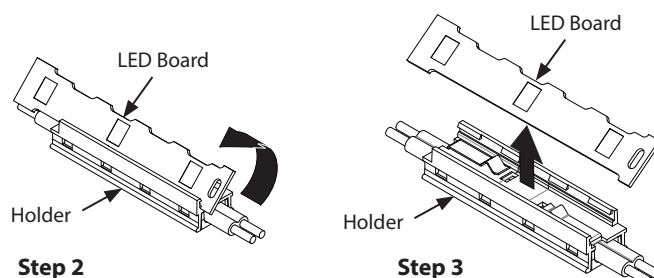

Replacing a Module Strand



Step 1: Turn off power to Usher™ Lighting System.

Step 2: Remove End Cap and Lens as previously shown.

Step 3: Cut the wires outside of the defective light strand on either end, as shown.

Step 4: Position a Putty Knife between the LED module and the mounting channel. Gently pry LED module up and out of the channel.

Step 5: Repeat removal procedure for all defective modules.

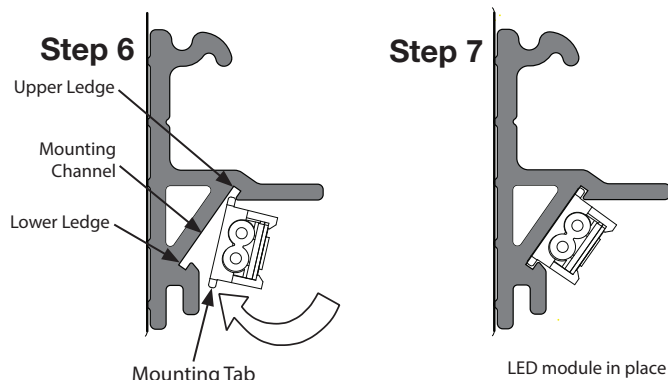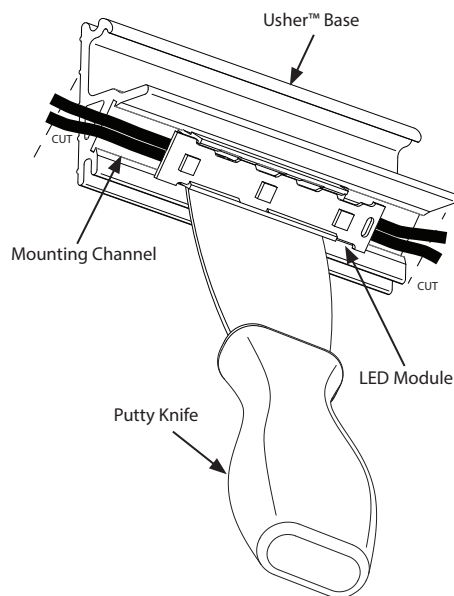

Step 6: Position replacement LED module in mounting channel with the upper mounting tab under the top ledge of the mounting channel, as shown.

Step 7: Rotate the module down until it makes contact with the lower ledge of the mounting channel. Position the Putty Knife on the lower mounting tab and continue to gently press the module into the channel until the lower mounting tab snaps into place under the lower ledge of the mounting channel.

Step 8: Repeat installation process for all new modules in the strand.

Step 9: Use Butt Connectors for 18ga wire to connect the wiring on the replacement strand to the existing strand wiring.

Step 10: Replace the lens.

Step 11: Re-establish power to the lighting system.

Replacing Usher™ Wall Lens

Step 1: Insert raised Tab at lower edge of Lens into slot in bottom of Usher™ Base. Rotate Lens upward and press against top of Base until it snaps over the ridge at the top of the Base.

Step 2: Install End Caps and Joiner Brackets, if needed.

