




ELITE

ELITE offers a rounded solution with overall high CRI values, 4 oz. copper trace for consistency, and low bin tolerance.

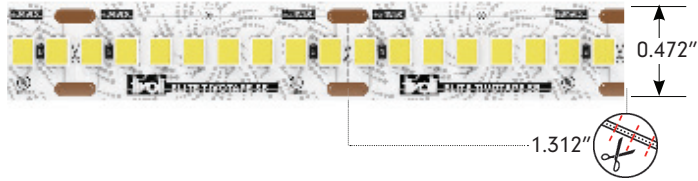

PRODUCT CODE	INTENSITY	INSTALL	LED COLOR	VOLTAGE
<b>TPLE</b>		<b>I</b>		<b>24</b>
TPLE = TivoTape ELITE	SB = Standard Brightness HO = High Output VHO = Very High Output	I = Indoor	22 = 2200K 24 = 2400K 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K	24 = 24V DC

Quick Spec

Quick Data based on 4000K			
Intensity	SB	HO	VHO
Lumens/ft	378	549	819
Efficacy (Lm/W)	117	122	117
CRI	90+	90+	90+
Measured Power W/ft	CF	CF	CF
Listed Power W/ft.	3.2	4.5	7
Max Run	29'	20'	13'



Available CCTs
2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K

IP67 available for SB and HO only

ADUL-series				
D	DOT	DIN	DIN-X	DTV
•	•	•	•	•

Non-Dimming (D), 0-10V (DOT), DMX (DIN), DMX Multi Address (DIN-X), Flicker Free TV (DTV)

Infinity
•

Universal input: 100V- 277V AC  
All-In-One dimming protocol: ELV, MLV, 0-10V, TRIAC, PWM



DEFINE- Standard Brightness

Standard Brightness TivoTape is durable and flexible with a 3 oz. copper trace for excellent heat dissipation and consistent color through-out recommended maximum run length.



PRODUCT CODE	INTENSITY	INSTALL	LED COLOR	VOLTAGE
<b>TPLD</b>	<b>SB</b>	<b>I</b>		<b>24</b>
TPLD = TivoTape DEFINE 90+CRI	SB = Standard Brightness	I = Indoor	22 = 2200K 24 = 2400K 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K	24 = 24V DC

Quick Spec

Quick Data based on 3000K	
Intensity	SB
Lumens/ft	227
Efficacy (Lm/W)	81
CRI	92
Measured Power W/ft	CF
Listed Power W/ft.	3
Max Run	32'



Available CCTs
2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K

IP67 Outdoor Rated Available

ADUL-series				
D	DOT	DIN	DIN-X	DTV
•	•	•	•	•

Non-Dimming (D), 0-10V (DOT), DMX (DIN), DMX Multi Address (DIN-X), Flicker Free TV (DTV)

Infinity
•

Universal input: 100V- 277V AC  
All-In-One dimming protocol: ELV, MLV, 0-10V, TRIAC, PWM



DEFINE- High Output

High Output TivoTape is durable and flexible with a 3 oz. copper trace for excellent heat dissipation and consistent color through-out recommended maximum run length.



PRODUCT CODE	INTENSITY	INSTALL	LED COLOR	VOLTAGE
<b>TPLD</b>	<b>HO</b>	<b>I</b>		<b>24</b>
TPLD = TivoTape DEFINE 90+CRI	HO = High Output	I = Indoor	22 = 2200K 24 = 2400K 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K	24 = 24V DC

Quick Spec

Quick Data based on	
Intensity	HO
Lumens/ft	393
Efficacy (Lm/W)	81
CRI	93
Measured Power W/ft	CF
Listed Power W/ft.	4.4
Max Run	21'



Available CCTs
2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K

IP67 Outdoor Rated Available

ADUL-series				
D	DOT	DIN	DIN-X	DTV
•	•	•	•	•

Non-Dimming (D), 0-10V (DOT), DMX (DIN), DMX Multi Address (DIN-X), Flicker Free TV (DTV)


Infinity
•

Universal input: 100V- 277V AC  
All-In-One dimming protocol: ELV, MLV, 0-10V, TRIAC, PWM



**DEFINE - Low Brightness**

Low Brightness TivoTape produces a low lumen output with large maximum runs. Multiple color options are available with 90+ CRI.

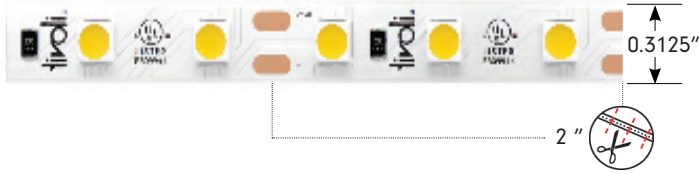

PRODUCT CODE	INTENSITY	INSTALL	LED COLOR	VOLTAGE
<b>TPLD</b> TivoTape DEFINE 90+ CRI**	<b>LB</b> Low Brightness	<b>I</b> Indoor	<b>27</b> = 2700K <b>30</b> = 3000K <b>40</b> = 4000K <b>62</b> = 6200K <b>AM</b> = Amber <b>RD</b> = Red <b>BL</b> = Blue	<b>12</b> = 12V DC

**Quick Spec**

Quick Data based on 2700K	
Intensity	LB
Lumens/ft	120
Efficacy (Lm/W)	82
CRI	92
Measured Power W/ft	CF
Listed Power W/ft.	1.46
Max Run	41'



Available CCTs
22700K, 3000K, 4000K, 6200K, Amber, Red, Blue

IP67 Outdoor Rated Available

ADUL-series				
D	DOT	DIN	DIN-X	DTV
*	*	*	*	

Non-Dimming (D), 0-10V (DOT), DMX (DIN), DMX Multi Address (DIN-X), Flicker Free TV (DTV)

Infinity				
		*		

Universal input: 100V- 277V AC  
All-In-One dimming protocol: ELV, MLV, 0-10V, TRIAC, PWM



**DEFINE - Side Emitting**

Side Emitting is used for certain applications that call for a unique design challenge that needs a specific LED package orientation.



PRODUCT CODE	INTENSITY	INSTALL	LED COLOR	VOLTAGE
<b>TPLS</b> TivoTape Define Side Emitting	<b>SB</b> Standard Brightness	<b>I</b> Indoor	<b>27</b> = 2700K <b>30</b> = 3000K <b>35</b> = 3500K <b>40</b> = 4000K <b>50</b> = 5000K <b>65</b> = 6500K	<b>24</b> = 24V DC

**Quick Spec**

Quick Data based on 2700K	
Intensity	SE
Lumens/ft	226
Efficacy (Lm/W)	75.3
CRI	90+
Measured Power W/ft	CF
Listed Power W/ft.	3.6
Max Run	32'



Available CCTs
2700K, 3000K, 3500K, 4000K, 5000K, 6500K,

ADUL-series				
D	DOT	DIN	DIN-X	DTV
*	*	*	*	*


Non-Dimming (D), 0-10V (DOT), DMX (DIN), DMX Multi Address (DIN-X), Flicker Free TV (DTV)

Infinity				
		*		

Universal input: 100V- 277V AC  
All-In-One dimming protocol: ELV, MLV, 0-10V, TRIAC, PWM




Power Leads



**TPL-I-LEAD-2-C**  
LEAD/END  
24" standard 2 conductor 18AWG lead wire  
factory attached to one end of tape



**TPL-I-LEAD-2-D**  
LEAD/LEAD  
24" standard 2 conductor 18AWG lead wire  
factory attached to both ends of tape




**TPL-I-XEP-2**  
EXTRA LEAD WIRE  
Additional factory attached 18AWG lead 2  
wire to extend lengths of LEAD-C and LEAD-D  
up to 20 ft. max  
Sold per foot



**TPL-I-CONN**  
18-22AWG BUTT CONNECTORS  
Used to interconnect factory attached lead  
wires.  
Sold individually


Extrusion

Available Lens Type  Compatible TivoTape




**MCHAN-8-LP**  
Low profile NO LENS OPTION  
clear polycarbonate, length 8'

ELITE DEF SB DEF HO DEF LB



**TPL-I-45-MCH-8-S**  
White PVC, 45° NO LENS length 8'


ELITE DEF SB DEF HO DEF LB



**DWAR**  
DEWARE Anodized Aluminum Extrusion,  
available in 6.5' lengths

Clear Opal Diffused


ELITE DEF SB DEF HO DEF LB



**EDGE**  
EDGE Anodized Aluminum Extrusion,  
available in 6.5' lengths

Opal


ELITE DEF SB DEF HO DEF LB



**MINI**  
MINI Anodized Aluminum Extrusion,  
available in 6.5' lengths

Opal


ELITE DEF SB DEF HO DEF LB



**MOFT**  
MOFFETT Anodized Aluminum Extrusion,  
available in 6.5' lengths

Clear Opal Diffused


ELITE DEF SB DEF HO DEF LB



**DYER**  
DYER Anodized Aluminum Extrusion,  
available in 6.5' lengths

Opal


ELITE DEF SB DEF HO DEF LB



**WRNR**  
WARNER Anodized Aluminum Extrusion,  
available in 6.5' lengths

Opal


ELITE DEF SB DEF HO DEF LB



**NOYS**  
NOYES Anodized Aluminum Extrusion,  
available in 6.5' lengths

Clear Opal Diffused


ELITE DEF SB DEF HO DEF LB



**VALN**  
VALENCIA Anodized Aluminum Extrusion,  
available in 6.5' lengths

Clear Opal Diffused


ELITE DEF SB DEF HO DEF LB



**DOME**  
DOME Anodized Aluminum Extrusion,  
available in 6.5' lengths

Opal


ELITE DEF SB DEF HO DEF LB



**ALTN**  
ALTON Anodized Aluminum Extrusion,  
available in 6.5' lengths

Clear Opal Diffused


ELITE DEF SB DEF HO DEF LB



**MRSL**  
MARSALA Anodized aluminum extrusion  
available in 6.5' length

Clear Opal Diffused


ELITE DEF SB DEF HO DEF LB



**HRIZ**  
HORIZON Anodized aluminum extrusion  
available in 6.5' length

Opal


ELITE DEF SB DEF HO DEF LB



**ASTR**  
ASTORIA Anodized aluminum extrusion  
available in 6.5' length

Clear Diffused

ELITE DEF SB DEF HO DEF LB




**INF**  
INFINITY PC extrusion,  
available in 8' lengths

Frosted Diffused

ELITE DEF SB DEF HO DEF LB


Extrusion

Available Lens Type  Compatible TivoTape




**COTA**  
CORTONA Anodized Aluminum Extrusion,  
available in 6.5' lengths

- Clear Opal Diffused  
ELITE DEF SB DEF HO DEF LB




**MOSR**  
MOSHER Anodized Aluminum Extrusion,  
available in 6.5' lengths

- Opal  
DEF SB DEF HO DEF LB

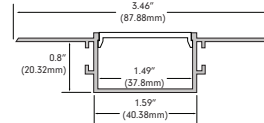


**GLOR**  
GLORIETA Anodized Aluminum Extrusion,  
available in 6.5' lengths

- Black Diffused  
ELITE DEF SB DEF HO DEF LB




**CARU**  
CARUSO Anodized Aluminum Extrusion,  
available in 6.5' lengths

- Black Diffused  
ELITE DEF SB DEF HO DEF LB




**HAYES**  
HAYES Anodized Aluminum Extrusion,  
available in 6.5' lengths

- Clear Opal Diffused  
ELITE DEF SB DEF HO DEF LB




**EDIN**  
EDINGER Anodized Aluminum Extrusion,  
available in 6.5' lengths

- Opal  
ELITE DEF SB DEF HO DEF LB




**DUET-04 (Surface)**  
DUET04 Aluminum Extrusion,  
available in 6.5' lengths

- Clear Opal Diffused Black  
ELITE DEF SB DEF HO DEF LB




**DUET-04 + DUET-04-CHAN-M-6.5 (Mud-in)**  
DUET04 Mud-in PC fire-proof Extrusion,  
available in 6.5' lengths

- Clear Opal Diffused Black  
ELITE DEF SB DEF HO DEF LB




**DUET-04 (Recessed)**  
DUET04 Anodized Aluminum Extrusion,  
available in 6.5' lengths

- Clear Opal Diffused Black  
ELITE DEF SB DEF HO DEF LB




**NOVA**  
NOVA Anodized Aluminum Extrusion,  
available in 6.5' lengths

- Opal  
DEF SB DEF HO DEF LB




**FABR**  
FABRIANO Anodized Aluminum Extrusion,  
available in 6.5' lengths

- Clear Opal Diffused Black




**GLOR**  
GLORIETA08 Anodized Aluminum Extrusion,  
available in 6.5' lengths

- Diffused Black  
DEF SB DEF LB




**DUET-01 (Surface)**  
DUET01 Aluminum Extrusion,  
available in 6.5' lengths

- Clear Opal Diffused Black

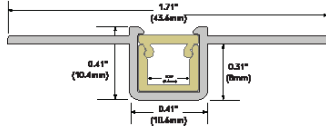

**DUET-01 + DUET-01-CHAN-M-6.5 (Mud-in)**  
DUET01 Aluminum Extrusion,  
available in 6.5' lengths

- Clear Opal Diffused Black



**DUET-01 (Recessed)**  
DUET01 Aluminum Extrusion,  
available in 6.5' lengths

- Clear Opal Diffused Black

**INFINITY - MLV / ELV / 0-10V / PWM / TRIAC**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-1.3-24	Indoor / Outdoor	100 - 277V AC	24V DC	1	30W	3W	1.3A
	INF-J-60-1-2.5-24				1	60W	6W	2.5A
	INF-J-96-1-4-24				1	96W	9W	4A
	INF-J-192-2-4-24				2	2x96W	2x9W	2x4A
	INF-J-288-3-4-24				3	3x96W	3x9W	3x4A

**ADUL/ADNM - 0-10V DIMMING**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL/ADNM Series Class 2 Transformer	ADNM-90-1-4-24-DOT	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	90W	3.75A
	ADUL-120-1-4-24-DOT				1	96W	4A
	ADUL-240-2-4-24-DOT				2	2x96W	2x4A
	ADUL-320-3-4-24-DOT				3	3x96W	3x4A

**ADUL/ADNM - NON DIMMING**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL/ADNM Series Class 2 Transformer	ADNM-90-1-4-24-D	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	90W	3.75A
	ADUL-120-1-4-24-D				1	96W	4A
	ADUL-240-2-4-24-D				2	2x96W	2x4A
	ADUL-320-3-4-24-D				3	3x96W	3x4A

**ADUL/ADNM - DMX SINGLE ADDRESS**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL/ADNM Series Class 2 Transformer	ADNM-90-1-4-24-DIN	Indoor / Outdoor	100-277V AC 50/60 Hz	24V DC	1	90W	3.75A
	ADUL-120-1-4-24-DIN				1	96W	4A
	ADUL-240-2-4-24-DIN				2	2x96W	2x4A
	ADUL-320-3-4-24-DIN				3	3x96W	3x4A

**ADUL - DMX MULTI ADDRESS**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-240-2-4-24-DIN-2	Indoor / Outdoor	100-277V AC 50/60 Hz	24V DC	2	2x96W	2x4A
	ADUL-320-3-4-24-DIN-3				3	3x96W	3x4A

**ADNM - DMX/DALI FLICKER-FREE FOR TV STUDIO**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-120-1-4-24-DTV	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	1x96W	1x4A
	ADNM-240-2-4-24-DTV				2	2x96W	2x4A
	ADNM-320-3-4-24-DTV				3	3x96W	3x4A

Power Supplies 12V

DEFINE LB

**INFINITY - MLV / ELV / 0-10V / PWM / TRIAC**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-1.3-24	Indoor / Outdoor	100 - 277V AC	24V DC	1	30W	3W	1.3A
	INF-J-60-1-2.5-24				1	60W	6W	2.5A
	INF-J-96-1-4-24				1	96W	9W	4A
	INF-J-192-2-4-24				2	2x96W	2x9W	2x4A
	INF-J-288-3-4-24				3	3x96W	3X9W	3x4A

**ADUL/ADNM - 0-10V DIMMING**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL/ADNM Series Class 2 Transformer	ADNM-90-1-4-24-DOT	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	90W	3.75A
	ADUL-120-1-4-24-DOT				1	96W	4A
	ADUL-240-2-4-24-DOT				2	2x96W	2x4A
	ADUL-320-3-4-24-DOT				3	3x96W	3x4A

**ADUL - NON DIMMING**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-D	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-D				2	2x60W	2x5A
	ADUL-240-3-5-12-D				3	3x60W	3x5A
	ADUL-320-4-5-12-D				4	4x60W	4x5A

**ADUL - DMX MULTI ADDRESS**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	2	2x60W	2x5A
	ADUL-240-3-5-12-DIN-3				3	3x60W	3x5A
	ADUL-320-4-5-12-DIN-4				4	4x60W	4x5A

**ADUL - DMX SINGLE ADDRESS**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DIN	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DIN				2	2x60W	2x5A
	ADUL-240-3-5-12-DIN				3	3x60W	3x5A


In-Wall DMX Control



TVOQ-1-WH  
White



TVOQ-10-XX-7  
XX = BK (Black), WH (White)



TVOQ-2-BK  
Black

Dimmers

**DIMMING - 0-10V**

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)

**DIMMING - MLV**

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

**DIMMING - ELV**

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W