
INSPIRE SERIES
EOS



tivoli®

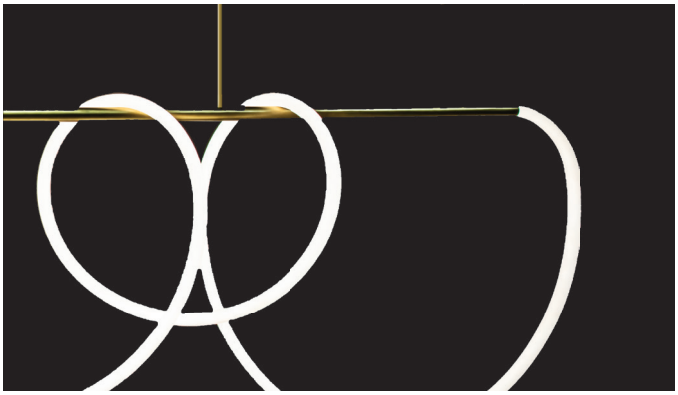


Project: _____

Type: _____

- High luminous efficiency with LM80 report
- UV Stabilized with food-grade environmental silicone housing (no yellowing or cracking)
- Multiple finish options available
- Low Voltage 24V DC
- 5 Year warranty


Dimensions

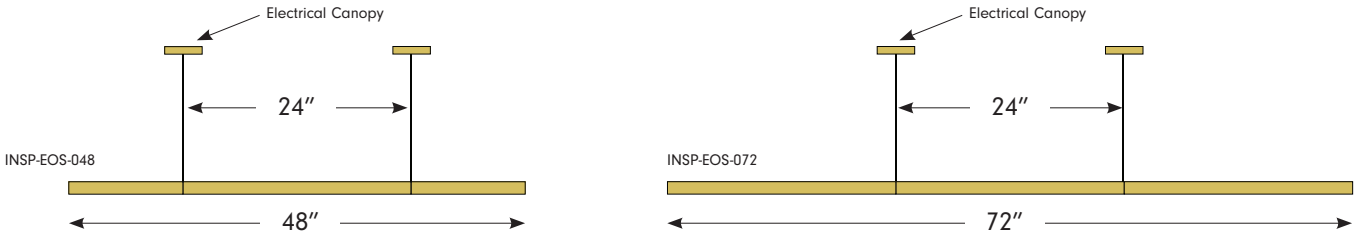

A: Typical sag is between 27″-48″ depending on finished design. Field adjustment will determine overall sag and finished design during install

B: 24″ Rigid Rod and Hang Straight Rod (field extendable), or 78″ suspension cable (field cuttable).

C: 16.25′ Flexile light engine. Dimmable with compatible wall switches

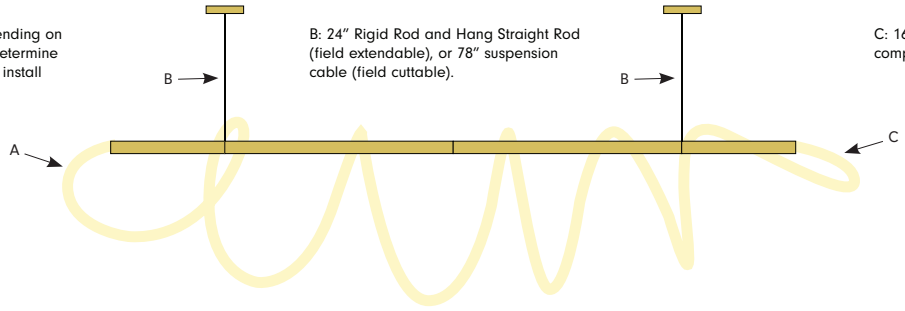

Ordering Guide

PRODUCT CODE		STYLE		ROD LENGTH		MOUNTING		LED COLOR		FINISH		VOLTAGE
INSP	-	**EOS**	-		-		-		-		-	**24**

INSP = INSPIRE Chandelier

EOS = Eos

048 = 48″ (4′)
072 = 72″ (6′)

CR1 = *5″ Canopy Round (with cable)
CR2 = **5″ Canopy Round (with rigid rod)
CR3 = ***5″ Canopy Round (hang straight)
TB = *T-Bar (white)
MM = *Minus Mount

23 = 2300K
27 = 2700K
30 = 3000K
35 = 3500K
40 = 4000K
RD = Red
GR = Green
BL = Blue

SC = Satin Copper
SN = Satin Nickel
SB = Satin Brass
BL = Matte Black
AB = Anodized Black
VZ = Vintage Bronze (Brushed)
VB = Vintage Brass (Brushed)

24 = 24V

*Factory standard 78″ cable with **CR1, TB, MM**
Factory standard 24″ rigid rod with **CR2
***Factory standard 24″ hang straight rod with **CR3**

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 08/26/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Specification

Output					
Kelvin Temperature	2300K	2700K	3000K	3500K	4000K
Lumens/Unit	4875	5281	5411	N/A	5606
Efficacy (Lm/W)	66.7	72.3	74.1	N/A	76.7
Beam Angle	360°				
Color Rendering Index (CRI)	95+				
Power Consumption (W/unit)	73.1				
Maximum Run	1 unit / single circuit (1 @ 96W) remote				

Output			
Kelvin Temperature	Red	Green	Blue
Lumens/Unit	CF	CF	CF
Efficacy (Lm/W)	N/A	N/A	N/A
Beam Angle	360°		
Color Rendering Index (CRI)	N/A		
Power Consumption (W/unit)	50.7		
Maximum Run	1 unit / single circuit (1 @ 96W) remote		

Physical	
Mounting	Canopy, Minus Mount, T-Bar Drop Ceiling
Material Resistance (Flexile)	Flame, Saline Solution, Solvent Solution, Acids, Alkali, Corrosive Gases, UV, Saltwater
Storage Temperature	-0°C / -32°F ~ 60°C / 140°F
Working Temperature	-20°C / -68°F ~ 55°C / 131°F
Electrical	
Dimming	TRIAC, ELV, MLV, 0-10V, DMX
Input Voltage	24V DC

Certification and Testing	
Certification	cETLus
Environment	Dry/Damp Location
IP Rating	IP54
Rated Hours (TM80)	70,000 hrs.
Warranty	5 Years

Mounting Accessories



CNPY-CR1-5-XX
XX = **SC** (satin copper), **SN** (satin nickel), **SB** (satin brass), **BL** (matte black), **AB** (anodized black), **VZ** (brushed vintage bronze), **VB** (brushed vintage brass)
5" dia. canopy includes 78" cable



CNPYF-CR1-5-XX
XX = **SC** (satin copper), **SN** (satin nickel), **SB** (satin brass), **BL** (matte black), **AB** (anodized black), **VZ** (brushed vintage bronze), **VB** (brushed vintage brass)
5" dia. electrical canopy with power feed hole includes 78" cable



CNPY-CR2-5-XX
XX = **SC** (satin copper), **SN** (satin nickel), **SB** (satin brass), **BL** (matte black), **AB** (anodized black), **VZ** (brushed vintage bronze), **VB** (brushed vintage brass)
5" dia. canopy includes 24" rigid rod



CNPYF-CR2-5-XX
XX = **SC** (satin copper), **SN** (satin nickel), **SB** (satin brass), **BL** (matte black), **AB** (anodized black), **VZ** (brushed vintage bronze), **VB** (brushed vintage brass)
5" dia. electrical canopy with power feed hole includes 24" rigid rod



CNPY-CR3-5-XX
XX = **SC** (satin copper), **SN** (satin nickel), **SB** (satin brass), **BL** (matte black), **AB** (anodized black), **VZ** (brushed vintage bronze), **VB** (brushed vintage brass)
5" dia. canopy includes 24" hang straight rod



CNPYF-CR3-5-XX
XX = **SC** (satin copper), **SN** (satin nickel), **SB** (satin brass), **BL** (matte black), **AB** (anodized black), **VZ** (brushed vintage bronze), **VB** (brushed vintage brass)
5" dia. electrical canopy with power feed hole includes 24" hang straight rod



TB-XX
XX = **BK** (black), **WH** (white)
T-Bar Mount includes mounting hardware includes 78" cable



MM-XX
XX = **SC** (satin copper), **SN** (satin nickel), **SB** (satin brass), **BL** (matte black), **AB** (anodized black), **VZ** (brushed vintage bronze), **VB** (brushed vintage brass) Minus Mount mounting includes 78" cable

Tivoli, LLC. reserves the right to modify this specification without prior notice.
Copyright © Tivoli 08/26/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Mounting Accessories



INSP-ROD-XX
XX = **SC** (satin copper), **SN** (satin nickel), **SB** (satin brass), **BL** (matte black), **AB** (anodized black), **VZ** (brushed vintage bronze), **VB** (brushed vintage brass)
12" threaded extension rod for ridig and hang straight canopies

Single Circuit Power Supplies Indoor/Outdoor

INFINITY - MLV / ELV / 0-10V / PWM / TRIAC DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MIN LOAD	MAX LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-96-1-4-24	Indoor / Outdoor	100-277V AC 50/60 Hz	24V DC	1	9W	96W	4A

Single Circuit Power Supplies Indoor

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-D	Indoor / Damp	100-277V AC 50/60 Hz	24V DC	1	96W	4A

ADUL - DMX SUB CONTROLLER (Single Address)

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-DIN	Indoor / Damp	100-277V AC 50/60 Hz	24V DC	1	96W	4A

Tivoli, LLC. reserves the right to modify this specification without prior notice.
Copyright © Tivoli 08/26/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Multi Circuit Power Supplies Indoor/Outdoor

INFINITY - MLV / ELV / 0-10V / PWM / TRIAC DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MIN LOAD	MAX LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-192-2-4-24	Indoor / Outdoor	1100-277V AC 50/60 Hz	24V DC	2	2x9W	2x96W	2x4A
	INF-J-288-3-4-24				3	3X9W	3x96W	3x4A

Multi Circuit Power Supplies Indoor

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-240-2-4-24-D	Indoor / Damp	100-277V AC 50/60 Hz	24V DC	2	2x96W	2x4A
	ADUL-320-3-4-24-D				3	3x96W	3x4A

ADUL - DMX SUB CONTROLLER (Single Address)

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-240-2-4-24-DIN	Indoor / Damp	100-277V AC 50/60 Hz	24V DC	2	2x96W	2x4A
	ADUL-320-3-4-24-DIN				3	3x96W	3x4A

ADUL - DMX SUB CONTROLLER (Multi Address)

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-240-2-4-24-DIN-2	Indoor / Damp	100-277V AC 50/60 Hz	24V DC	2	2x96W	2x4A
	ADUL-320-3-4-24-DIN-3				3	3x96W	3x4A

Dimmer + Driver

STANDARD STATIC DRIVER + DIMMER 2 IN 1

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
Standard Driver + Dimmer Static 2 in 1 Class 2	TDD-1-XXX-24	Indoor	120V AC 60Hz	24V DC	1	96W	4A

WIRELESS STATIC DRIVER + DIMMER 2 IN 1

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
Wireless Driver + Dimmer Static 2 in 1 Class 2	TDD-1-XXX-24-KIT	Indoor	120V AC 60Hz	24V DC	1	96W	4A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 08/26/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458