Project: _____ TYPE: _____

- Slim minimal profile for tight applications
- Multiple CCTs to choose from
- Includes Tivoli's eXo shield coating
- Factory soldered lead wire
- Standard IP54 damp rated and IP67 wet location available
- Large range of available Kelvin temperatures
- Low lead times
- 3oz. Copper Trace
- 5 Year warranty

Dimensions

c UL us LISTED

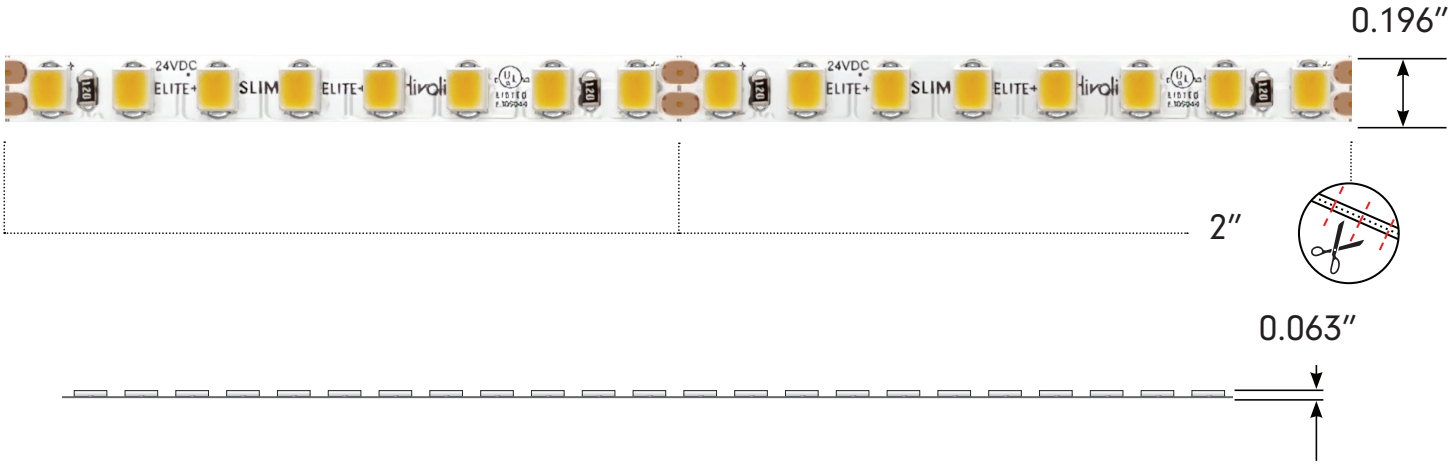

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 08.28.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Order Guide

PRODUCT CODE		TYPE		INSTALL		LED COLOR		*MAX RUN		VOLTAGE
TPLEP	-	**SL**	-	**I**	-		-		-	**24**
TPLEP = TivoTape ELITE Plus+		**SL** = Slim		**I** = Indoor		**18** = 1800K **22** = 2200K **24** = 2400K **27** = 2700K **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K		**MR** = Max Run		**24** = 24V DC

* Optional - Leave blank if not needed
Note: A layout/drawing must accompany each order showing run length and location
Note: Runs with LEAD-C are rounded **up** to next cut interval (unless otherwise specified)
Note: Runs with LEAD-D are rounded **down** to next cur interval (unless otherwise specified)

Specification

SB Standard Brightness								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	744	CF	863	CF
Efficacy (Lm/W)	CF	CF	CF	CF	146	CF	173	CF
CRI	CF	CF	CF	CF	93.1	CF	93.2	CF
Measured Power W/ft	CF	CF	CF	CF	5.1	CF	5	CF
Listed Power W/ft.	4.4							
Max Run	18'							

CF = Call Factory for information

Electrical	
Input Voltage	24V
Dimming	MLV/ELV/0-10V/DMX
Physical	
LED Package	2835
LEDs/ft	48.7
Adhesive	3M VHB Tape
Copper Trace	3 Ounce
Dimensions	0.196" (5mm)
Cut Increments	2" (50.8mm)
Operating Temperature	-40°F (-40°C) ~ +140°F (+60°C)
Certification and Testing	
Certification	UL Listed, CE
Lumen Maintenance (L70)	60,000 hrs
Environment	IP54 Damp Location, Conformal eXo Shield
Warranty	5 years

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Power Leads and Jumpers (Installed by Tivoli's certified solderers)



TPL-S-I-LEAD-2-C
LEAD/END
24" standard 2 conductor 22AWG lead wire factory attached to one end of tape



TPL-S-I-LEAD-2-D
LEAD/LEAD
24" standard 2 conductor 22AWG lead wire factory attached to both ends of tape

TPL-S-I-XEP-2
EXTRA LEAD WIRE
Additional factory attached 22AWG lead 2 wire to extend lengths of LEAD-C and LEAD-D up to 20 ft. max
Sold per foot



TPL-I-CONN
18-22AWG BUTT CONNECTORS
Used to interconnect factory attached lead wires.
Sold individually.

Compatible Extrusions



MCHAN-8-LP
Low profile NO LENS OPTION clear polycarbonate, length 8'



TPL-I-45-MCH-8-S
White PVC, 45° NO LENS length 8'



DUET-01-CHAN-SLV-6.5
Anodized aluminum extrusion available in 6.5' length



DUET-01-CHAN-M-6.5
Mud-In PC fire-proof extrusion 6.5' Length

Note: **DUET-01-CHAN-SLV-6.5** and **DUET-01-CHAN-M-6.5** are required for mud-in application



DUET-01-CHAN-SLV-6.5
Anodized aluminum extrusion available in 6.5' length

Note: **DUET-01-CHAN-SLV-6.5** and **DUET-01-LNS-R-XXX-6.5** are required for recessed application



FABR-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5' length



MRSM-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5' length

Note: For complete information on DUET profile, refer to specification

Tivoli, LLC. reserves the right to modify this specification without prior notice.

In-Wall Controls

Touchscreen

TVOQ-1-WH
White

Touchscreen

TVOQ-10-XX-7
XX = **BK** (Black), **WH** (White)

Touchscreen

TVOQ-2-BK
Black

Power Supplies

INFINITY - MLV / ELV / 0-10V / PWM / TRIAC

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-1.3-24	Indoor / Outdoor	100 - 277V AC	24V DC	1	30W	3W	1.3A
	INF-J-60-1-2.5-24				1	60W	6W	2.5A
	INF-J-96-1-4-24				1	96W	9W	4A
	INF-J-192-2-4-24				2	2x96W	2x9W	2x4A
	INF-J-288-3-4-24				3	3x96W	3X9W	3x4A

ER

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ER Series Class 2 Driver	ER-80-1-3.3-24-D	Indoor / Outdoor	100-277V AC 5o//60 Hz	24V DC	1	80W	3.3A
ER Series Class 2 0-10V Dimming	ERG-80-24-DIM1-10						

ADUL/ADNM - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL/ADNM Series Class 2 Transformer	ADNM-90-1-4-24-D	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	90W	3.75A
	ADUL-120-1-4-24-D	Indoor			1	96W	4A
	ADUL-240-2-4-24-D	Indoor			2	2x96W	2x4A
	ADUL-320-3-4-24-D	Indoor			3	3x96W	3x4A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 08.28.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Power Supplies

ADUL/ADNM - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL/ADNM Series Class 2 Transformer	ADNM-90-1-4-24-DOT	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	90W	3.75A
	ADUL-120-1-4-24-DOT	Indoor			1	96W	4A
	ADUL-240-2-4-24-DOT	Indoor			2	2x96W	2x4A
	ADUL-320-3-4-24-DOT	Indoor			3	3x96W	3x4A

ADUL/ADNM - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL/ADNM Series Class 2 Transformer	ADNM-90-1-4-24-DIN	Indoor / Outdoor	100-277V AC 5o/60 Hz	24V DC	1	90W	3.75A
	ADUL-120-1-4-24-DIN	Indoor			1	96W	4A
	ADUL-240-2-4-24-DIN	Indoor			2	2x96W	2x4A
	ADUL-320-3-4-24-DIN	Indoor			3	3x96W	3x4A

ADUL - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-240-2-4-24-DIN-2	Indoor	100-277V AC 5o/60 Hz	24V DC	2	2x96W	2x4A
	ADUL-320-3-4-24-DIN-3				3	3x96W	3x4A

ADNM - DMX/DALI FLICKER-FREE FOR TV STUDIO

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-120-1-4-24-DTV	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	1x96W	1x4A
	ADNM-240-2-4-24-DTV				2	2x96W	2x4A
	ADNM-320-3-4-24-DTV				3	3x96W	3x4A

Dimmer + Driver

STANDARD STATIC DRIVER + DIMMER 2 IN 1

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
Standard Driver + Dimmer Static 2 in 1 Class 2	TDD-1-XXX-24	Indoor	120V AC 60Hz	24V DC	1	96W	4A

WIRELESS STATIC DRIVER + DIMMER 2 IN 1

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
Wireless Driver + Dimmer Static 2 in 1 Class 2	TDD-1-XXX-24-KIT	Indoor	120V AC 60Hz	24V DC	1	96W	4A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 08.28.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)

DIMMING -MLV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

DIMMING - ELV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 08.28.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458