GLORIETA 08
Design Guide

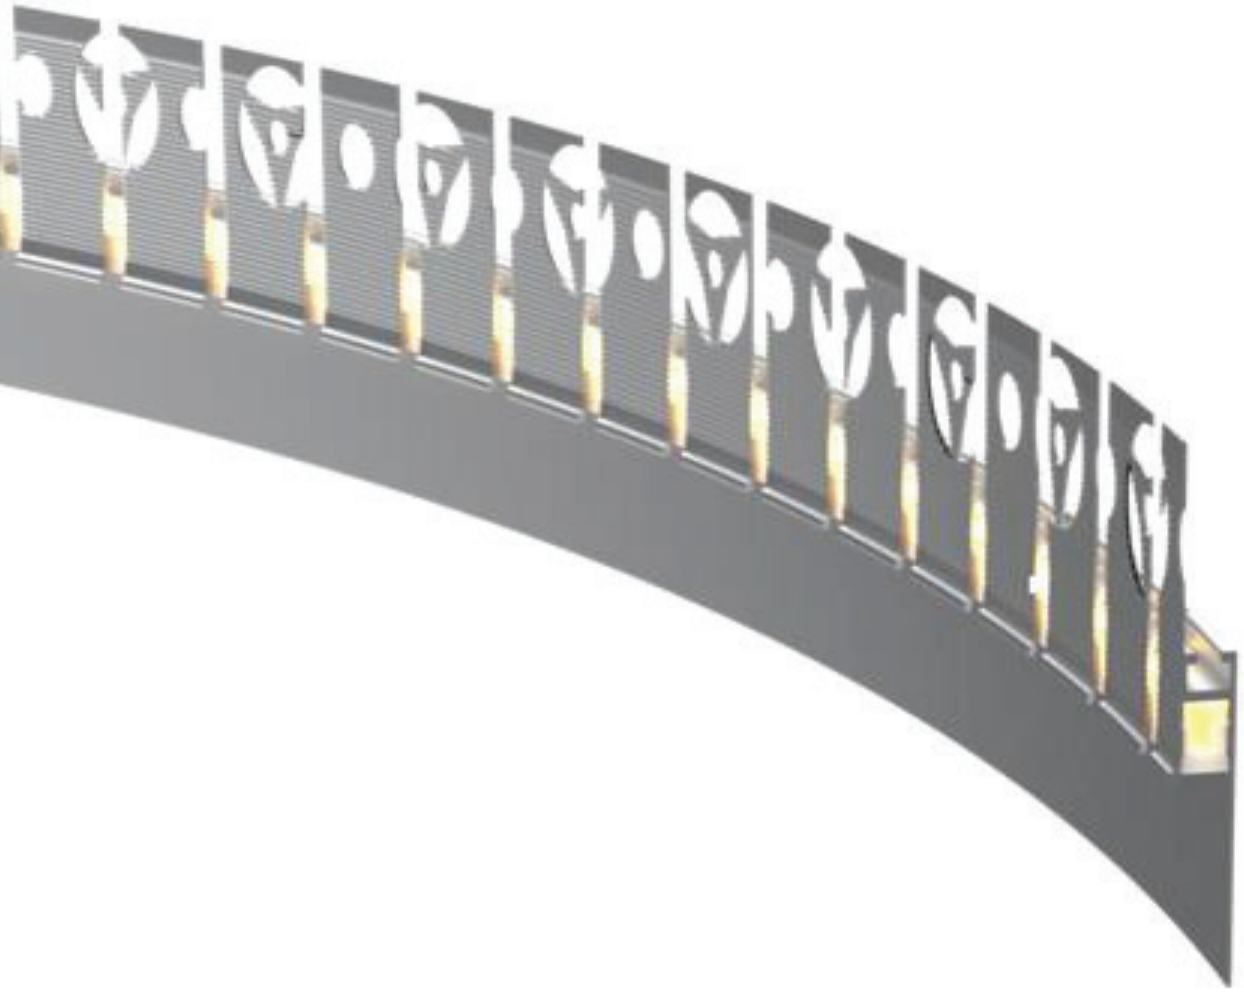

Profile & Dimensions

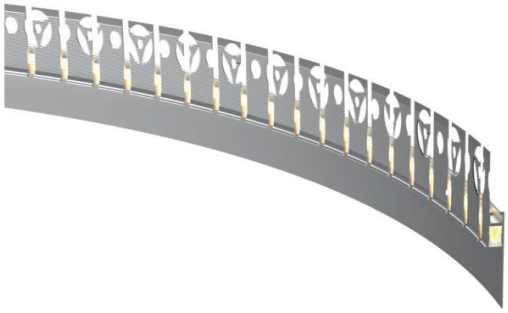

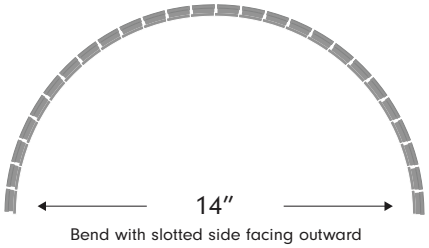

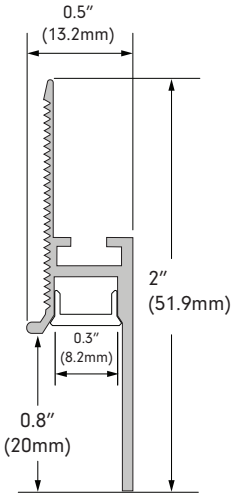

Available TivoTape Options - Indoor

Dual Bend
SB

Ordering Information



GLOR-08-CHAN-XXX-6.5
XXX=SLV (Silver), **BLK** (Black), **WHT** (White)
Anodized Aluminum Extrusion, available in 6.5′ lengths

GLOR-08-LNS-SIL-DIF-XXX
XXX (unit in feet) = **10, 50, 100**
Diffused Silicone Lens Roll

GLOR-08-EC-XXX-01
XXX= **WHT** (White), **BLK** (Black)
Solid End Cap

GLOR-08-EC-XXX-02
XXX= **WHT** (White), **BLK** (Black)
Powerfeed End Cap

Diode Visibility

Diffused lens

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Installation

1

Before installation make sure extrusion is free of any defects and clean

2

Install extrusion to the base of desired location

3

Stick mesh-tape on extrusion and drywall evenly divided on both surfaces

4

Apply spakle evenly across both surface to desired look and let dry

5

After drying - finish with paint coat

Note: Glorieta 08 is a bendable extrusion and can be formed to curved surfaces

Tivoli, LLC. reserves the right to modify this specification without prior notice.