Project: _____ TYPE: _____

- Dual bend on both horizontal and vertical planes
- Perfect for all bendable Urban extrusion
- Low bin tolerance with a 1.5 Step McAdam Elipse standard
- High efficacy value
- High CRI 97+
- Factory soldered lead wire
- Large range of available Kelvin temperatures
- Low lead times
- 5 Year warranty

Dimensions

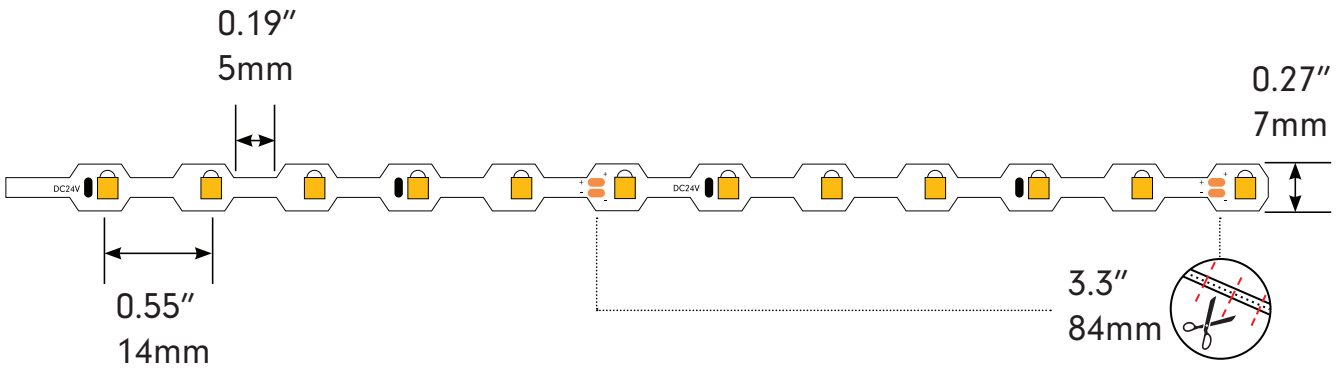

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Order Guide

PRODUCT CODE		PROFILE		INTENSITY		INSTALL		LED COLOR		VOLTAGE
TPLDB	-	**SI**	-	**SB**	-	**I**	-		-	**24**
TPLDB = TivoTape Dual Bend		**SI** = Single Row		**SB** = Standard Brightness		**I** = Indoor		**18** = 1800K **22** = 2200K **24** = 2400K **27** = 2700K **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K		**24** = 24V DC

Note: A layout/drawing must accompany each order showing run length and location
Note: Runs with LEAD-C are rounded **up** to next cut interval (unless otherwise specified)
Note: Runs with LEAD-D are rounded **down** to next cur interval (unless otherwise specified)

Specification

SB Standard Brightness								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	320.7	353.6	390.2	390.2	439.0	439.0	448.8	448.8
Efficacy (Lm/W)	68.0	74.9	82.8	82.8	93.0	93.0	95.3	95.3
CRI	94.0	94.0	97.0	97.0	97.0	97.0	97.0	94.0
Measured Power W/ft.	4.7							
Listed Power W/ft.	4.4							
Max Run	20'							

Electrical	
Input Voltage	24V
Dimming	MLV/ELV/0-10V/DMX
Physical	
LED Package	2835
LEDs/ft	22
Adhesive	3M VHB Tape
Copper Trace	3 Ounce
Dimensions	0.27" (7mm)
Cut Increments	3.3" (84mm)
Operating Temperature	-40°F (-40°C) ~ +140°F (+60°C)
Certification and Testing	
Certification	UL Listed, CE
Lumen Maintenance (L70)	60,000 hrs
Binning Tolerance	1.5 Step MacAdam Elipse
Environment	IP54 Damp Location
Warranty	5 years

Tivoli, LLC. reserves the right to modify this specification without prior notice.
Copyright © 2021 Tivoli 09.03.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Photometrics (based on 3000K)

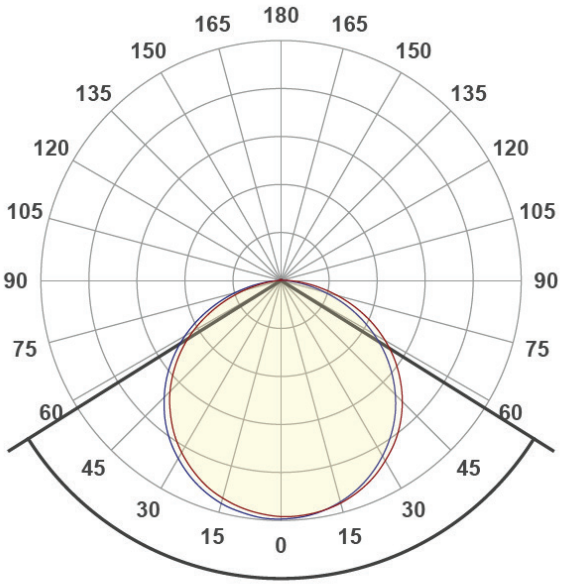

115.9°

TM-30: 95.6

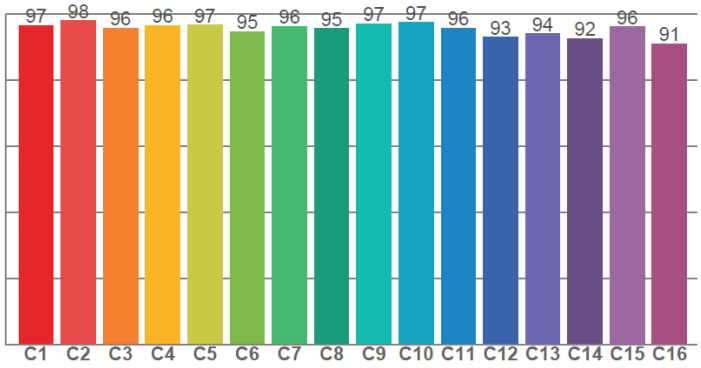

CRI: 97.2 (R1-R8)

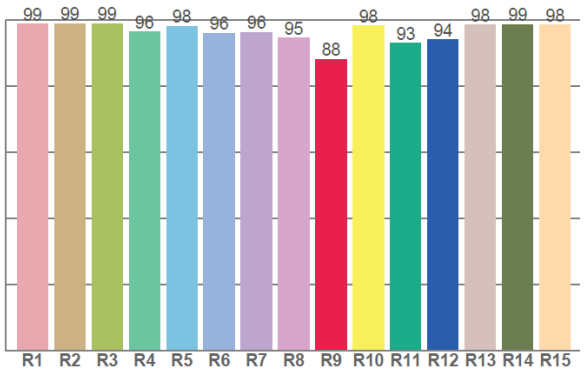

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.7	98.9	98.8	96.4	98.1	95.9	96.2	94.5	88.1	98.2	92.9	94.0	98.4	98.6	98.5

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
96.5	97.9	95.6	96.5	96.6	94.7	96.2	95.5	96.9	97.3	95.7	92.9	94.0	92.5	96.1	91.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
93.8	96.9	94.2	97.3	95.2	92.1	93.5	96.0	97.6	96.8	97.4	97.0	96.5	94.7	94.4

CQS: 95.1

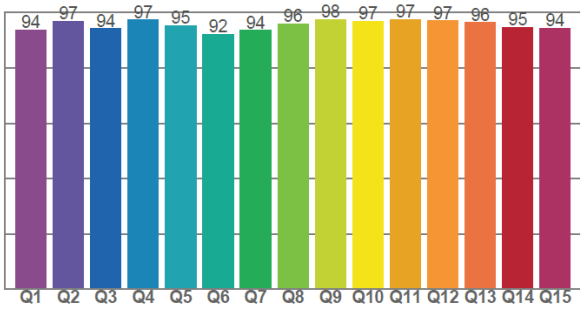

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Power Leads and Jumpers (Installed by Tivoli's certified solderers)



TPL-S-I-LEAD-2-C
LEAD/END
24" standard 2 conductor 22AWG lead wire factory attached to one end of tape



TPL-S-I-LEAD-2-D
LEAD/LEAD
24" standard 2 conductor 22AWG lead wire factory attached to both ends of tape



TPL-S-I-XEP-2
EXTRA LEAD WIRE
Additional factory attached 22AWG lead 2 wire to extend lengths of LEAD-C and LEAD-D up to 20 ft. max
Sold per foot



TPL-I-CONN
18-22AWG BUTT CONNECTORS
Used to interconnect factory attached lead wires.
Sold individually.

In-Wall Controls

TVOQ-1-WH
White

TVOQ-10-XX-7
XX = **BK** (Black), **WH** (White)

TVOQ-2-BK
Black

Tivoli, LLC. reserves the right to modify this specification without prior notice.
Copyright © 2021 Tivoli 09.03.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Extrusions



MCHAN-8-LP
Low profile NO LENS OPTION clear polycarbonate, length 8′



TPL-I-45-MCH-8-S
White PVC, 45° NO LENS length 8′



DWAR-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5′ lengths



EDGE-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5′ lengths



MINI-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5′ lengths



MOFT-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5′ lengths



DYER-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5′ lengths



WRNR-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5′ lengths



NOYS-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5′ lengths



VALN-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5′ lengths



DOME-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5′ lengths



ALTN-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5′ lengths



MRSL-CHAN-SLV-6.5
Anodized aluminum extrusion available in 6.5′ length



HRIZ-CHAN-SLV-6.5
Anodized aluminum extrusion available in 6.5′ length



ASTR-CHAN-SLV-6.5
Anodized aluminum extrusion available in 6.5′ length



INF-X-CHAN-8
X = **C** (clear), **F** (frosted)
PC extrusion,
available in 8′ lengths

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Compatible Extrusions



COTA-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5′ lengths



CARU-CHAN-SLV-6.5
Anodized aluminum extrusion, available in 6.5′ lengths



HAYS-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5′ lengths



DUET-04-CHAN-XXX-6.5
Aluminum extrusion
6.5′ Length



DUET-04-CHAN-M-6.5
Mud-In PC fire-proof extrusion
6.5′ Length

Note: **DUET-04-CHAN-SLV-6.5** and **DUET-04-CHAN-M-6.5** are required for mud-in application



DUET-04-CHAN-SLV-6.5
Anodized aluminum extrusion available in 6.5′ length

Note: **DUET-04-CHAN-SLV-6.5** and **DUET-04-LNS-R-XXX-6.5** are required for recessed application



MOSR-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5′ lengths



NOVA-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5′ lengths



EDIN-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5′ lengths



GLOR-CHAN-SLV-6.5
Bendable Anodized Aluminum Extrusion,
available in 6.5′ lengths



GLOR-08-CHAN-SLV-6.5
Bendable Anodized Aluminum Extrusion,
available in 6.5′ lengths

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Recommended Power Supplies

INFINITY - MLV / ELV / 0-10V / PWM / TRIAC

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-1.3-24	Indoor / Outdoor	100 - 277V AC	24V DC	1	30W	3W	1.3A
	INF-J-60-1-2.5-24				1	60W	6W	2.5A
	INF-J-96-1-4-24				1	96W	9W	4A
	INF-J-192-2-4-24				2	2x96W	2x9W	2x4A
	INF-J-288-3-4-24				3	3x96W	3X9W	3x4A

ER

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ER Series Class 2	ER-80-1-3.3-24-D	Indoor / Outdoor	100-277V AC 5o/60 Hz	24V DC	1	80W	3.3A
ER Series Class 2 0-10V Dimming	ERG-80-24-DIM1-10						

ADUL/ADNM - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL/ADNM Series Class 2 Transformer	ADNM-90-1-4-24-D	Indoor/Outdoor	100-277V AC 50/60 HZ	24V DC	1	90W	3.75A
	ADUL-120-1-4-24-D	Indoor			1	96W	4A
	ADUL-240-2-4-24-D	Indoor			2	2x96W	2x4A
	ADUL-320-3-4-24-D	Indoor			3	3x96W	3x4A

ADUL/ADNM - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL/ADNM Series Class 2 Transformer	ADNM-90-1-4-24-DOT	Indoor/Outdoor	100-277V AC 50/60 HZ	24V DC	1	90W	3.75A
	ADUL-120-1-4-24-DOT	Indoor			1	96W	4A
	ADUL-240-2-4-24-DOT	Indoor			2	2x96W	2x4A
	ADUL-320-3-4-24-DOT	Indoor			3	3x96W	3x4A

ADUL/ADNM - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL/ADNM Series Class 2 Transformer	ADNM-90-1-4-24-DIN	Indoor/Outdoor	100-277V AC 5o/60 Hz	24V DC	1	90W	3.75A
	ADUL-120-1-4-24-DIN	Indoor			1	96W	4A
	ADUL-240-2-4-24-DIN	Indoor			2	2x96W	2x4A
	ADUL-320-3-4-24-DIN	Indoor			3	3x96W	3x4A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Recommended Power Supplies

ADUL - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-240-2-4-24-DIN-2	Indoor	100-277V AC 50/60 Hz	24V DC	2	2x96W	2x4A
	ADUL-320-3-4-24-DIN-3				3	3x96W	3x4A

ADNM - DMX/DALI FLICKER-FREE FOR TV STUDIO

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-120-1-4-24-DTV	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	1x96W	1x4A
	ADNM-240-2-4-24-DTV				2	2x96W	2x4A
	ADNM-320-3-4-24-DTV				3	3x96W	3x4A

Recommended Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)

DIMMING -MLV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

DIMMING - ELV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 09.03.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Dimmer + Driver

STANDARD STATIC DRIVER + DIMMER 2 IN 1

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
Standard Driver + Dimmer Static 2 in 1 Class 2	TDD-1-XXX-24	Indoor	120V AC 60Hz	24V DC	1	96W	4A

WIRELESS STATIC DRIVER + DIMMER 2 IN 1

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
Wireless Driver + Dimmer Static 2 in 1 Class 2	TDD-1-XXX-24-KIT	Indoor	120V AC 60Hz	24V DC	1	96W	4A

Tivoli, LLC. reserves the right to modify this specification without prior notice.