Project: _____ TYPE: _____

- 100% shatter proof formed G120 PET bulb
- Compatible with 4-way chasing
- Multiple LED filament - one side goes out, the other(s) stays lit
- Long life span - 10,000 hours
- Nickel coated brass base to eliminate corrosion due to weather conditions
- Mercury free
- Environmentally friendly with zero UV emission
- Save 85-90% energy with a direct LED replacement of incandescent lamps
- 360 Degree light distribution
- Excellent heat dissipation
- IP65

Dimension

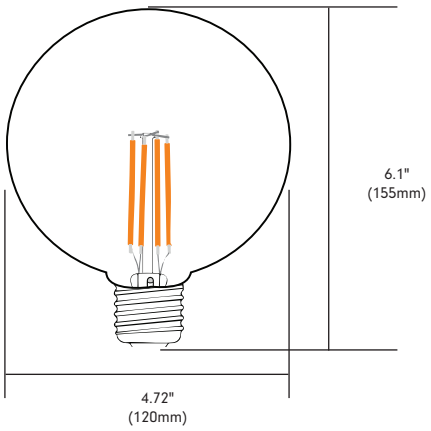

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 10/05/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Order Guide

PRODUCT CODE		TYPE		FILAMENT		FINISH		SOCKET		LED COLOR		VOLTAGE
TVLTPET	-	**G120L**	-	**4**	-	**C**	-	**26**	-		-	**120**
TVLTPET = Tivolite PET Bulb		**G120L** = G120 Bulb		**4** = 4 Filament		**C** = Clear		**26** = E26		**24** = 2400K **27** = 2700K		**120** = 120V AC

Specification

Output (based on 2700K)	
Kelvin Temperature	2400K, 2700K
Lumens (lm/fixture)	361.5
CRI	91.5
Efficacy (lm/W)	93.9
Beam Angle	360
Electrical	
Input Voltage	120V AC
Measured Power Consumption	3.8W
Listed Power Consumption	4W
Physical	
Bulb	PET Vacuum Sealed
Base	E26 Nickle Coated Brass Base
Certification and Testing	
Certification	cULus
Environment	Outdoor Location
IP Rating	IP65
Rated Life	10,000 hrs.
Warranty	5 years

Dimmer Compatability

Lutron Masestro	MACL-153MLH-WH
Lutron Diva Gen3	FVWCL-153PH-WH
Eaton	HALO SALO6P
Lutron -CL-Diva	DVWCL-153PH
Lutron -CL-Toggler	TGCL-153PH
Lutron -CL-Skylark	CTCL-153DP
Lutron -CL-Maestro	MACL-153MR-WH
Lutron -CL-Diva	DVCL-153P
Lutron -ELV-Diva ELV	DVELV-300P
Lutron -ELV-Skylark ELV	SELV-300P

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 10/05/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458