


Project: _____ Type: _____

- Low bin tolerance with a 1 Step McAdam Elipse
- Tunable white from 1900K - 3500K and 2700K - 6500K range for precise color choice
- Outdoor location suited
- High CRI value
- Factory soldered lead wire
- IP67 Wet location
- Multiple mounting channel options
- 5 Year warranty

Dimensions

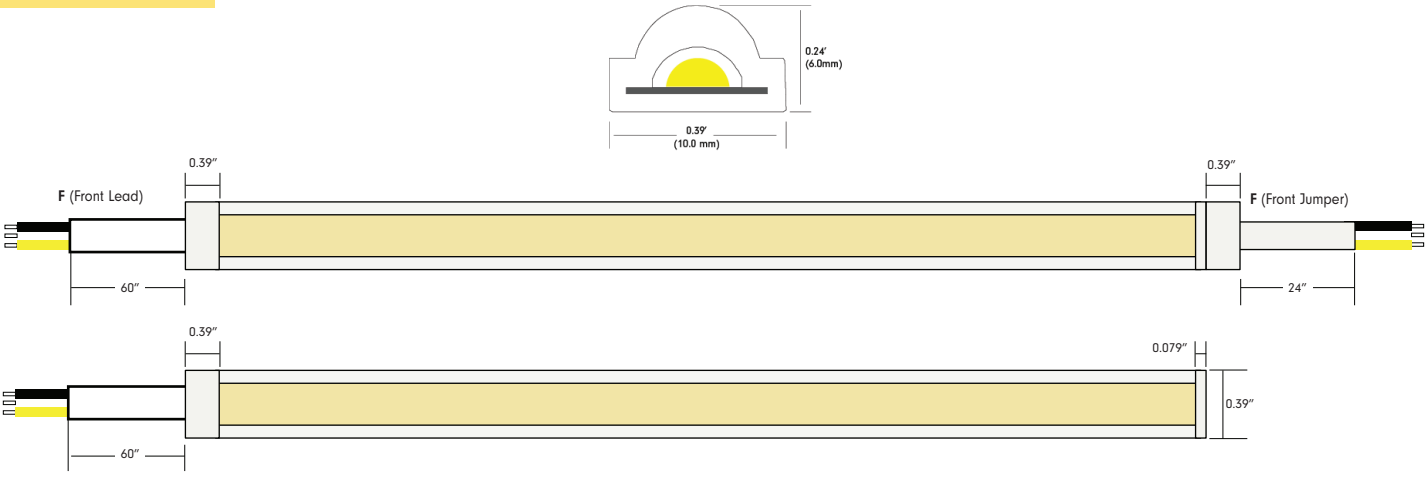

Copyright © Tivoli 09/28/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Order Guide

NOTE: Lengths and quantity of each run must be submitted at time of order.
TRACE Mini Dynamic White is factory prep only. In-field cutting will void warranty.

PRODUCT CODE	INTENSITY	PROFILE	RANGE	END PREP1	END PREP2	VOLTAGE	LENGTH
TRCEM	**SB**	**CB**		**F**		**24**	
TRCEM = Trace Mini Flexible Light	**SB** = Standard Output	**CB** = COB	**01** = 1900K-3500K **02** = 2700K-6500K	**F** = Front Lead	**F** = Front Jumper **E** = End Cap	**24** = 24V DC	Refer to chart page 3-6

Note: A layout/drawing must accompany each order showing run length and location
Lengths are rounded down to next cur interval (unless otherwise specified)
Minimum order length 1' / maximum order length 16' - Order in increments of 1.09" (27.7mm)

Specification

CCT	1900K	3500K	All On
Lumens (lm/ft)	CF	CF	CF
Power Consumption (W/ft)	CF	CF	CF
Efficacy (lm/W)	CF	CF	CF

CCT	2700K	6500K	All On
Lumens (lm/ft)	76.2	102.1	179.9
Power Consumption (W/ft)	1.52	1.52	3.04
Efficacy (lm/W)	50.13	67.17	59.18

Electrical	
Input Voltage	24V DC
Power Supply	Class 2
CRI	90+
Dimming	DMX
Wire Size (End Prep)	18 AWG, 3 wire
Max Run Electrical	30'
Max Run Mechanical	16'
Physical	
LED Package	COB (Chip on FPC)
Adhesive	3M VHB Tape
Dimensions	0.39" x 0.24" (10mm)
Cutting Increments	0.984" (25mm)
Operating Temperature	-40°F (-40°C) ~ 140°F (60°C)
Certification and Testing	
Certification	cULus
Rated Life L70/hrs	60,000
Environment	Wet Location
IP Rating	IP67
Binning Tolerance	1 Step MacAdam Elipse
Warranty	5 Years

Copyright © Tivoli 09/28/26


www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

F - F Lead Prep Configuration Order Guide


Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below
Total product length received will include added end-prep of choice within a tolerance (±in 0.275) - See example (B) below

Example (A)

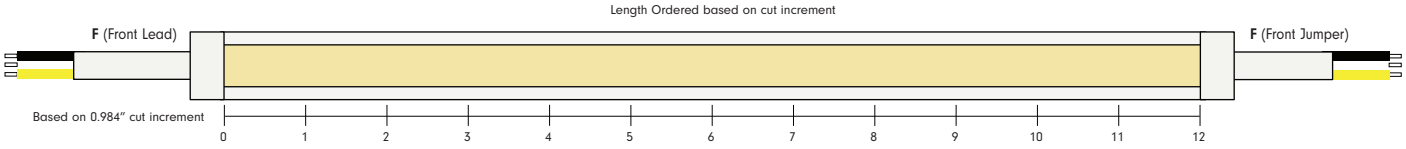

Example (B)

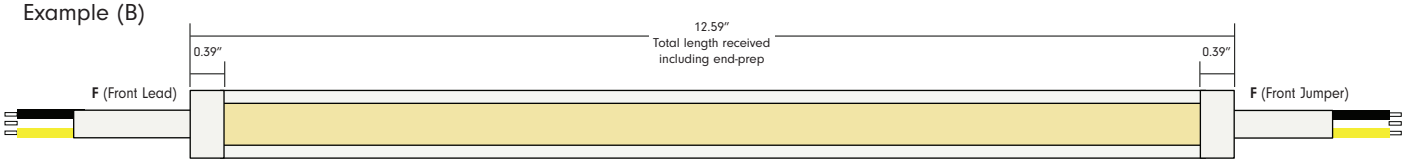

Part# Example: **TRCEM-SB-CB-01-F-F-24-011**

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS /RUN	NOMINAL LENGTH
012	12.59	1.05	2.99	1'
013	13.58	1.13	3.24	
014	14.56	1.21	3.49	
015	15.54	1.30	3.74	
016	16.53	1.38	3.99	
017	17.51	1.46	4.24	
018	18.50	1.54	4.49	
019	19.48	1.62	4.74	
020	20.47	1.71	4.99	
021	21.45	1.79	5.24	
022	22.43	1.87	5.49	
023	23.42	1.95	5.73	
024	24.40	2.03	5.98	2'
025	25.39	2.12	6.23	
026	26.37	2.20	6.48	
027	27.35	2.28	6.73	
028	28.34	2.36	6.98	
029	29.32	2.44	7.23	
030	30.31	2.53	7.48	
031	31.29	2.61	7.73	
032	32.28	2.69	7.98	
033	33.26	2.77	8.23	
034	34.24	2.85	8.48	
035	35.23	2.94	8.73	
036	36.21	3.02	8.98	3'
037	37.20	3.10	9.23	
038	38.18	3.18	9.48	
039	39.17	3.26	9.72	
040	40.15	3.35	9.97	
041	41.13	3.43	10.22	
042	42.12	3.51	10.47	
043	43.10	3.59	10.72	
044	44.09	3.67	10.97	
045	45.07	3.76	11.22	
046	46.06	3.84	11.47	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS /RUN	NOMINAL LENGTH
047	47.04	3.92	11.72	
048	48.02	4.00	11.97	4'
049	49.01	4.08	12.22	
050	49.99	4.17	12.47	
051	50.98	4.25	12.72	
052	51.96	4.33	12.97	
053	52.95	4.41	13.22	
054	53.93	4.49	13.46	
055	54.91	4.58	13.71	
056	55.90	4.66	13.96	
057	56.88	4.74	14.21	
058	57.87	4.82	14.46	
059	58.85	4.90	14.71	
060	59.84	4.99	14.96	5'
061	60.82	5.07	15.21	
062	61.80	5.15	15.46	
063	62.79	5.23	15.71	
064	63.77	5.31	15.96	
065	64.76	5.40	16.21	
066	65.74	5.48	16.46	
067	66.72	5.56	16.71	
068	67.71	5.64	16.96	
069	68.69	5.72	17.20	
070	69.68	5.81	17.45	
071	70.66	5.89	17.70	
072	71.65	5.97	17.95	
073	72.63	6.05	18.20	6'
074	73.61	6.13	18.45	
075	74.60	6.22	18.70	
076	75.58	6.30	18.95	
077	76.57	6.38	19.20	
078	77.55	6.46	19.45	
079	78.54	6.54	19.70	
080	79.52	6.63	19.95	
081	80.50	6.71	20.20	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS /RUN	NOMINAL LENGTH
082	81.49	6.79	20.45	
083	82.47	6.87	20.70	
084	83.46	6.95	20.94	
085	84.44	7.04	21.19	7'
086	85.43	7.12	21.44	
087	86.41	7.20	21.69	
088	87.39	7.28	21.94	
089	88.38	7.36	22.19	
090	89.36	7.45	22.44	
091	90.35	7.53	22.69	
092	91.33	7.61	22.94	
093	92.32	7.69	23.19	
094	93.30	7.77	23.44	
095	94.28	7.86	23.69	
096	95.27	7.94	23.94	
097	96.25	8.02	24.19	8'
098	97.24	8.10	24.44	
099	98.22	8.19	24.69	
100	99.21	8.27	24.93	
101	100.19	8.35	25.18	
102	101.17	8.43	25.43	
103	102.16	8.51	25.68	
104	103.14	8.60	25.93	
105	104.13	8.68	26.18	
106	105.11	8.76	26.43	
107	106.09	8.84	26.68	
108	107.08	8.92	26.93	
109	108.06	9.01	27.18	9'
110	109.05	9.09	27.43	
111	110.03	9.17	27.68	
112	111.02	9.25	27.93	
113	112.00	9.33	28.18	
114	112.98	9.42	28.43	
115	113.97	9.50	28.67	
116	114.95	9.58	28.92	

Copyright © Tivoli 09/28/26


www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

F - F Lead Prep Configuration Order Guide


Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below
Total product length received will include added end-prep of choice within a tolerance (±in 0.275) - See example (B) below

Example (A)

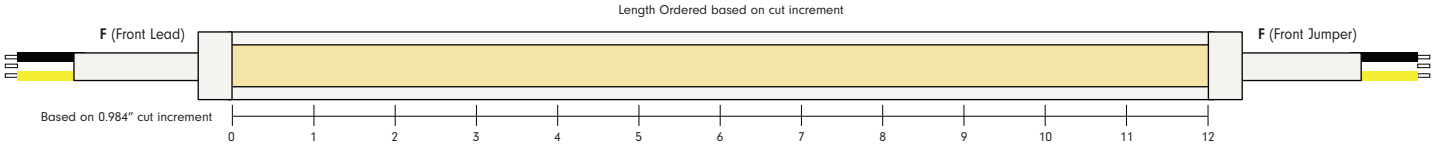

Example (B)

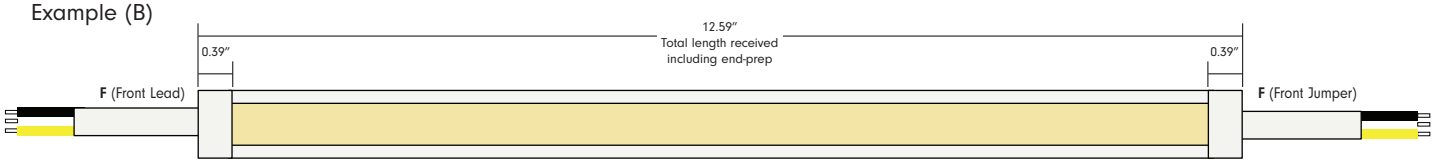

Part# Example: **TRCEM-SB-CB-01-F-F-24-011**

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS/CUT INCREMENT	NOMINAL LENGTH
117	115.94	9.66	29.17	
118	116.92	9.74	29.42	
119	117.91	9.83	29.67	
120	118.89	9.91	29.92	
121	119.87	9.99	30.17	10'
122	120.86	10.07	30.42	
123	121.84	10.15	30.67	
124	122.83	10.24	30.92	
125	123.81	10.32	31.17	
126	124.80	10.40	31.42	
127	125.78	10.48	31.67	
128	126.76	10.56	31.92	
129	127.75	10.65	32.17	
130	128.73	10.73	32.41	
131	129.72	10.81	32.66	
132	130.70	10.89	32.91	
133	131.69	10.97	33.16	
134	132.67	11.06	33.41	11'
135	133.65	11.14	33.66	
136	134.64	11.22	33.91	
137	135.62	11.30	34.16	
138	136.61	11.38	34.41	
139	137.59	11.47	34.66	
140	138.58	11.55	34.91	
141	139.56	11.63	35.16	
142	140.54	11.71	35.41	
143	141.53	11.79	35.66	
144	142.51	11.88	35.91	
145	143.50	11.96	36.15	
146	144.48	12.04	36.40	12'
147	145.47	12.12	36.65	
148	146.45	12.20	36.90	
149	147.43	12.29	37.15	
150	148.42	12.37	37.40	
151	149.40	12.45	37.65	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS/CUT INCREMENT	NOMINAL LENGTH
152	150.39	12.53	37.90	
153	151.37	12.61	38.15	
154	152.35	12.70	38.40	
155	153.34	12.78	38.65	
156	154.32	12.86	38.90	
157	155.31	12.94	39.15	
158	156.29	13.02	39.40	13'
159	157.28	13.11	39.65	
160	158.26	13.19	39.90	
161	159.24	13.27	40.14	
162	160.23	13.35	40.39	
163	161.21	13.43	40.64	
164	162.20	13.52	40.89	
165	163.18	13.60	41.14	
166	164.17	13.68	41.39	
167	165.15	13.76	41.64	
168	166.13	13.84	41.89	
169	167.12	13.93	42.14	
170	168.10	14.01	42.39	14'
171	169.09	14.09	42.64	
172	170.07	14.17	42.89	
173	171.06	14.25	43.14	
174	172.04	14.34	43.39	
175	173.02	14.42	43.64	
176	174.01	14.50	43.88	
177	174.99	14.58	44.13	
178	175.98	14.66	44.38	
179	176.96	14.75	44.63	
180	177.95	14.83	44.88	
181	178.93	14.91	45.13	
182	179.91	14.99	45.38	15'
183	180.90	15.07	45.63	
184	181.88	15.16	45.88	
185	182.87	15.24	46.13	
186	183.85	15.32	46.38	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS/CUT INCREMENT	NOMINAL LENGTH
187	184.84	15.40	46.63	
188	185.82	15.48	46.88	
189	186.80	15.57	47.13	
190	187.79	15.65	47.38	
191	188.77	15.73	47.62	
192	189.76	15.81	47.87	
193	190.74	15.90	48.12	
194	191.72	15.98	48.37	16'

Copyright © Tivoli 09/28/26


www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

F - E Lead Prep Configuration Order Guide


Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below
Total product length received will include added end-prep of choice within a tolerance (±in 0.275) - See example (B) below

Example (A)

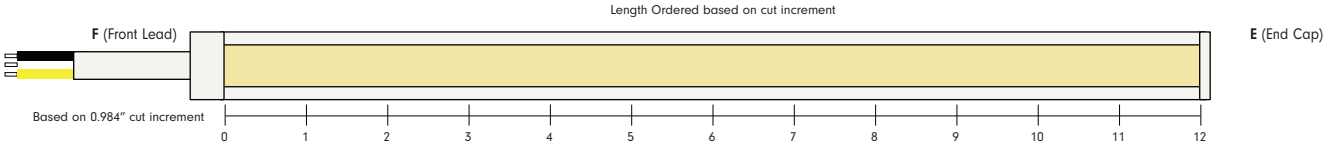

Example (B)

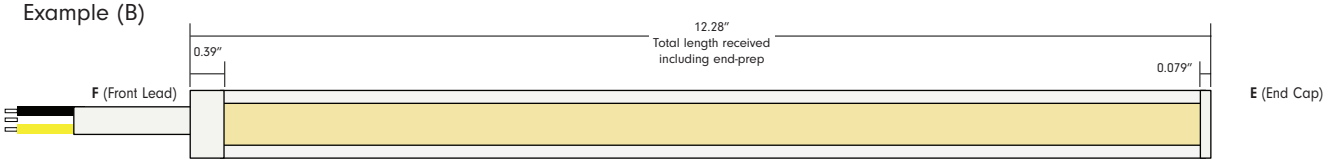

Part# Example: **TRCEM-SB-CB-01-F-E-24-011**

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS/CUT INCREMENT	NOMINAL LENGTH
012	12.28	1.02	2.99	1'
013	13.26	1.11	3.24	
014	14.25	1.19	3.49	
015	15.23	1.27	3.74	
016	16.22	1.35	3.99	
017	17.20	1.43	4.24	
018	18.19	1.52	4.49	
019	19.17	1.60	4.74	
020	20.15	1.68	4.99	
021	21.14	1.76	5.24	
022	22.12	1.84	5.49	
023	23.11	1.93	5.73	
024	24.09	2.01	5.98	2'
025	25.08	2.09	6.23	
026	26.06	2.17	6.48	
027	27.04	2.25	6.73	
028	28.03	2.34	6.98	
029	29.01	2.42	7.23	
030	30.00	2.50	7.48	
031	30.98	2.58	7.73	
032	31.97	2.66	7.98	
033	32.95	2.75	8.23	
034	33.93	2.83	8.48	
035	34.92	2.91	8.73	
036	35.90	2.99	8.98	3'
037	36.89	3.07	9.23	
038	37.87	3.16	9.48	
039	38.85	3.24	9.72	
040	39.84	3.32	9.97	
041	40.82	3.40	10.22	
042	41.81	3.48	10.47	
043	42.79	3.57	10.72	
044	43.78	3.65	10.97	
045	44.76	3.73	11.22	
046	45.74	3.81	11.47	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS/CUT INCREMENT	NOMINAL LENGTH
047	46.73	3.89	11.72	
048	47.71	3.98	11.97	
049	48.70	4.06	12.22	4'
050	49.68	4.14	12.47	
051	50.67	4.22	12.72	
052	51.65	4.30	12.97	
053	52.63	4.39	13.22	
054	53.62	4.47	13.46	
055	54.60	4.55	13.71	
056	55.59	4.63	13.96	
057	56.57	4.71	14.21	
058	57.56	4.80	14.46	
059	58.54	4.88	14.71	
060	59.52	4.96	14.96	
061	60.51	5.04	15.21	5'
062	61.49	5.12	15.46	
063	62.48	5.21	15.71	
064	63.46	5.29	15.96	
065	64.45	5.37	16.21	
066	65.43	5.45	16.46	
067	66.41	5.53	16.71	
068	67.40	5.62	16.96	
069	68.38	5.70	17.20	
070	69.37	5.78	17.45	
071	70.35	5.86	17.70	
072	71.34	5.94	17.95	
073	72.32	6.03	18.20	6'
074	73.30	6.11	18.45	
075	74.29	6.19	18.70	
076	75.27	6.27	18.95	
077	76.26	6.35	19.20	
078	77.24	6.44	19.45	
079	78.22	6.52	19.70	
080	79.21	6.60	19.95	
081	80.19	6.68	20.20	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS/CUT INCREMENT	NOMINAL LENGTH
082	81.18	6.76	20.45	
083	82.16	6.85	20.70	
084	83.15	6.93	20.94	
085	84.13	7.01	21.19	7'
086	85.11	7.09	21.44	
087	86.10	7.17	21.69	
088	87.08	7.26	21.94	
089	88.07	7.34	22.19	
090	89.05	7.42	22.44	
091	90.04	7.50	22.69	
092	91.02	7.59	22.94	
093	92.00	7.67	23.19	
094	92.99	7.75	23.44	
095	93.97	7.83	23.69	
096	94.96	7.91	23.94	
097	95.94	8.00	24.19	8'
098	96.93	8.08	24.44	
099	97.91	8.16	24.69	
100	98.89	8.24	24.93	
101	99.88	8.32	25.18	
102	100.86	8.41	25.43	
103	101.85	8.49	25.68	
104	102.83	8.57	25.93	
105	103.82	8.65	26.18	
106	104.80	8.73	26.43	
107	105.78	8.82	26.68	
108	106.77	8.90	26.93	
109	107.75	8.98	27.18	9'
110	108.74	9.06	27.43	
111	109.72	9.14	27.68	
112	110.71	9.23	27.93	
113	111.69	9.31	28.18	
114	112.67	9.39	28.43	
115	113.66	9.47	28.67	
116	114.64	9.55	28.92	

Copyright © Tivoli 09/28/26


www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

F - E Lead Prep Configuration Order Guide


Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below
Total product length received will include added end-prep of choice within a tolerance (±in 0.275) - See example (B) below

Example (A)

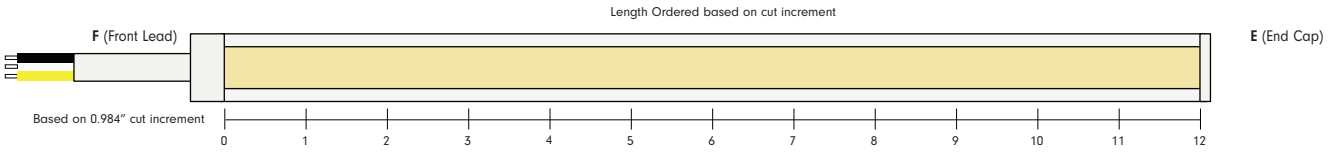

Example (B)

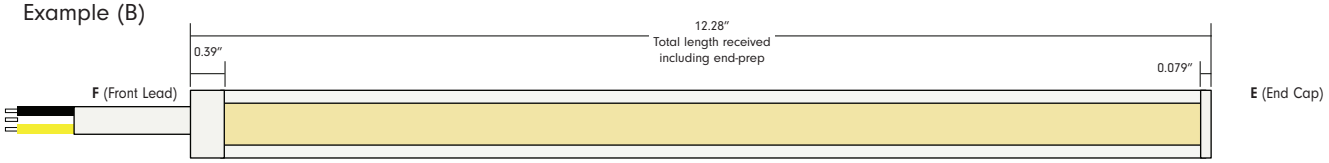

Part# Example: **TRCEM-SB-CB-01-F-E-24-011**

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS/CUT INCREMENT	NOMINAL LENGTH
117	115.63	9.64	29.17	
118	116.61	9.72	29.42	
119	117.59	9.80	29.67	
120	118.58	9.88	29.92	
121	119.56	9.96	30.17	
122	120.55	10.05	30.42	10'
123	121.53	10.13	30.67	
124	122.52	10.21	30.92	
125	123.50	10.29	31.17	
126	124.48	10.37	31.42	
127	125.47	10.46	31.67	
128	126.45	10.54	31.92	
129	127.44	10.62	32.17	
130	128.42	10.70	32.41	
131	129.41	10.78	32.66	
132	130.39	10.87	32.91	
133	131.37	10.95	33.16	
134	132.36	11.03	33.41	11'
135	133.34	11.11	33.66	
136	134.33	11.19	33.91	
137	135.31	11.28	34.16	
138	136.30	11.36	34.41	
139	137.28	11.44	34.66	
140	138.26	11.52	34.91	
141	139.25	11.60	35.16	
142	140.23	11.69	35.41	
143	141.22	11.77	35.66	
144	142.20	11.85	35.91	
145	143.19	11.93	36.15	
146	144.17	12.01	36.40	12'
147	145.15	12.10	36.65	
148	146.14	12.18	36.90	
149	147.12	12.26	37.15	
150	148.11	12.34	37.40	
151	149.09	12.42	37.65	


CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS/CUT INCREMENT	NOMINAL LENGTH
152	150.08	12.51	37.90	
153	151.06	12.59	38.15	
154	152.04	12.67	38.40	
155	153.03	12.75	38.65	
156	154.01	12.83	38.90	
157	155.00	12.92	39.15	
158	155.98	13.00	39.40	13'
159	156.97	13.08	39.65	
160	157.95	13.16	39.90	
161	158.93	13.24	40.14	
162	159.92	13.33	40.39	
163	160.90	13.41	40.64	
164	161.89	13.49	40.89	
165	162.87	13.57	41.14	
166	163.85	13.65	41.39	
167	164.84	13.74	41.64	
168	165.82	13.82	41.89	
169	166.81	13.90	42.14	
170	167.79	13.98	42.39	14'
171	168.78	14.06	42.64	
172	169.76	14.15	42.89	
173	170.74	14.23	43.14	
174	171.73	14.31	43.39	
175	172.71	14.39	43.64	
176	173.70	14.47	43.88	
177	174.68	14.56	44.13	
178	175.67	14.64	44.38	
179	176.65	14.72	44.63	
180	177.63	14.80	44.88	
181	178.62	14.88	45.13	
182	179.60	14.97	45.38	
183	180.59	15.05	45.63	15'
184	181.57	15.13	45.88	
185	182.56	15.21	46.13	
186	183.54	15.29	46.38	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS/CUT INCREMENT	NOMINAL LENGTH
187	184.52	15.38	46.63	
188	185.51	15.46	46.88	
189	186.49	15.54	47.13	
190	187.48	15.62	47.38	
191	188.46	15.71	47.62	
192	189.45	15.79	47.87	
193	190.43	15.87	48.12	
194	191.41	15.95	48.37	16'

Copyright © Tivoli 09/28/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Power Leads and Jumpers (Installed by Tivoli's certified solderers)



TRCEM-CB-DW-LEAD-XEP
Extend lengths up to 20 ft. max
Sold per foot





GELJB-3-02-BK
1/2/3 Wire IP67 Medium Gel Filled Junction Box



GELJB-3-01-BK
1/2/3 Wire IP67 Gel Filled Junction Box

Mounting Accessories





TRCEM-CB-10-CLP
10mm COB PC clip
length 0.48"
sold each

In-Wall Controls





Touchscreen

TVOQ-1-WH
White





Touchscreen

TVOQ-10-XX-7
XX = **BK** (Black), **WH** (White)





Touchscreen

TVOQ-2-BK
Black



MDRX-AURA-XX
X = **02, 12, 32** (ports)
MADRIX Aura is a stand-alone controller for up to 2, 12, or 32 universes per unit

Copyright © Tivoli 09/28/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Network Hardware



MDRX-LUNA-XX
X = **04, 08, 16** (ports)
MADRIX Luna 4, 8, 16 port universe Artnet to DMX interface 16 port 8192, 8 port 4096, 4 port 2048 DMX channels



ARTNET-L-X-512
X = **8** (8 Ports)**, 16** (Ports)
8 or 16 port universe Artnet to DMX interface, 16 port 8192




NTG-SWI-XXPT
XX = **8** (8 Ports), **16** (16 Ports)
NETGEAR 16-Port gigabit Unmanaged Switch




DMX-SPLT-X
X= 2, 4, 8 (Output Channels)
DMX Splitter
1 Input to 8 Output
Ethernet or Hardware Connection

Compatible Extrusions




MCHAN-8-LP
Low profile NO LENS OPTION clear polycarbonate, length 8'




TPL-I-45-MCH-8-S
White PVC, 45° NO LENS length 8'

Wiring Diagram 0-10V

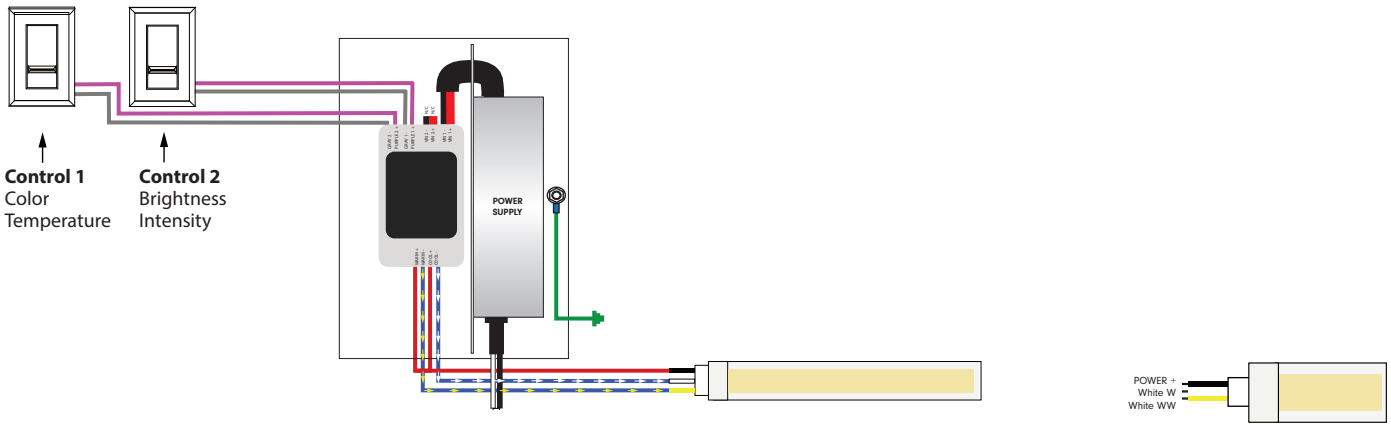

Wiring Diagram DMX

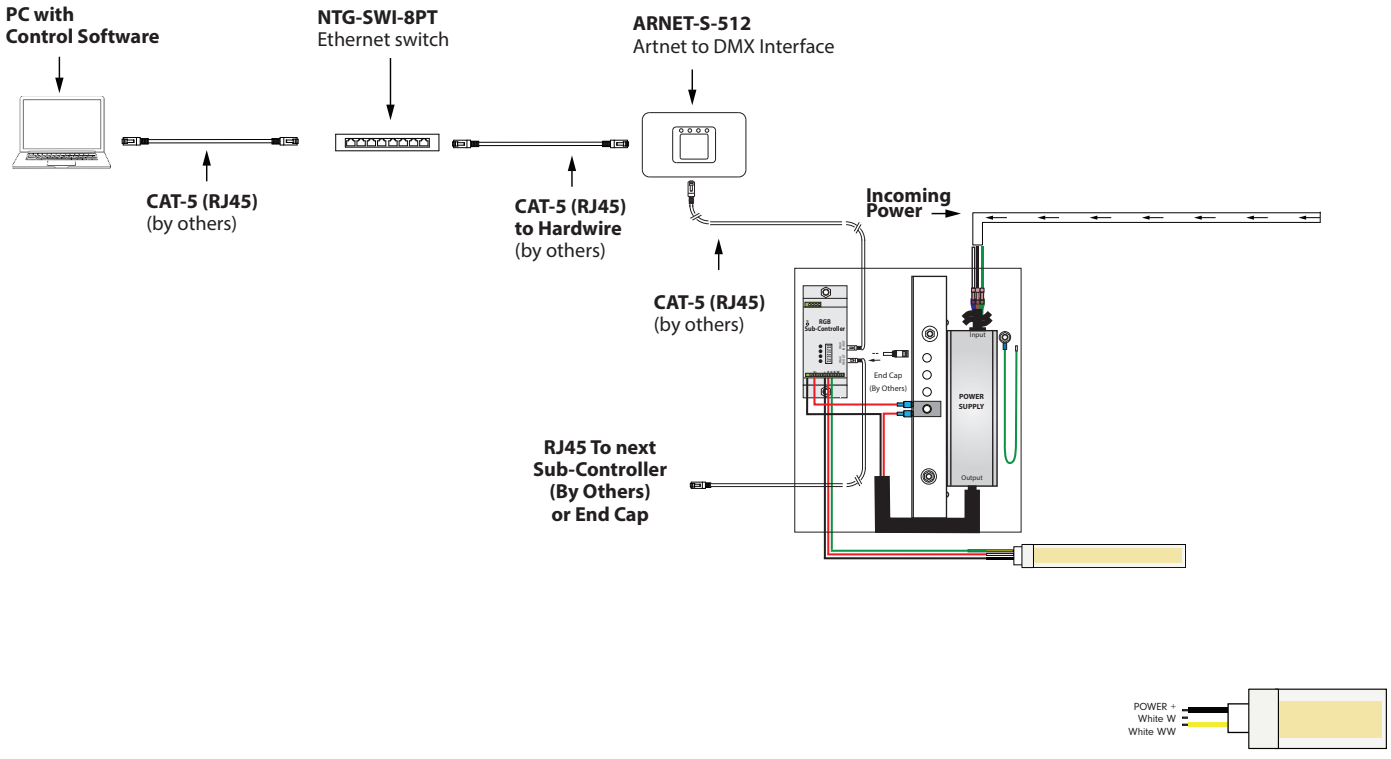

Power Supplies - Outdoor

ADNM - 0-10V DYNAMIC WHITE SINGLE CIRCUIT

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-90-1-4-24-VAOT	Indoor / Outdoor	100-277V AC 5o/60 Hz	24V DC	1	90W	3.75A
	ADNM-120-1-4-24-VAOT				1	96W	4A

ADNM - 0-10V DYNAMIC WHITE MULTI CIRCUIT

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-240-2-4-24-VAOT	Indoor / outdoor	100-277V AC 5o/60 Hz	24V DC	2	2x96W	2x4A
	ADNM-320-3-4-24-VAOT				3	3x96W	3x4A

ADNM - VARIABLE / DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	**ADNM-90-1-4-24-VW**	**Indoor / Outdoor**	**100-277V AC 50/60 HZ**	**24V DC**	**1**	**90W**	**3.75A**
	ADNM-120-1-4-24-VW				**1**	**96W**	**4A**
	ADNM-240-2-4-24-VW				**2**	**2x96W**	**2x4A**
	ADNM-320-3-4-24-VW				**3**	**3x96W**	**3x4A**

ADNM - VARIABLE / DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	**ADNM-240-2-4-24-VW-2**	**Indoor / Outdoor**	**100-277V AC 5o/60 Hz**	**24V DC**	**2**	**2x96W**	**2x4A**
	ADNM-320-3-4-24-VW-3				**3**	**3x96W**	**3x4A**

ADNM - DMX/DALI FLICKER-FREE FOR TV STUDIO

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	**ADNM-120-1-4-24-DTV**	**Indoor / Outdoor**	**100-277V AC 50/60 HZ**	**24V DC**	**1**	**1x96W**	**1x4A**
	ADNM-240-2-4-24-DTV				**2**	**2x96W**	**2x4A**
	ADNM-320-3-4-24-DTV				**3**	**3x96W**	**3x4A**

DMX Sub-Controller

DESCRIPTION	CAT NO	MODES	WATTAGE	PRIMARY VOLTAGE	DIMENSION
DMX Sub-controller	TPL-RGBW-180-24	Sub-controller only	5X96W	24V DC	2.87" W X 6.46" L X 1.45" H

Copyright © Tivoli 09/28/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Dimmer + Driver

STANDARD 3 CHANNEL DRIVER + DIMMER 2 IN 1

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
Driver + Dimmer 3-Channel 2 in 1 Class 2	TDD-2-XXX-24	Indoor	120V AC 60Hz	24V DC	1	96W	4A

WIRELESS 3 CHANNEL DRIVER + DIMMER 2 IN 1

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
Wireless Driver + Dimmer 3-Channel 2 in 1 Class 2	TDD-2-XXX-24-KIT	Indoor	120V AC 60Hz	24V DC	1	96W	4A

Tivoli Commissioning Service

Tivoli's DMX Commissioning service involves the setup and configuration of our DMX lighting and control system, ensuring the seamless integration of our lighting fixtures with the specified DMX Control system ordered.

For more information about commission service, contact:
sales@tivoliusa.com
714-957-6101 (Engineering Tech Support)

Tivocue Wall Controllers (Default Scenes: White, Red,Green, Blue, Light Blue, Purple, Pink, Dim White, Yellow, Cool Cycle, Warm Cycle, All Cycle, Rainbow Scroll, Blackout)	
TVOQ-REM-COMM-1	Remote DMX commissioning for TIVOCUE 2 and 10 dmx wall controller. Pixel mapping/control is not offered for remote commissioning
TVOQ-ONS-COMM-1	Onsite DMX comissioning for TIVOCUE 2 and 10 dmx wall controller (est. 2 days)
ARTNET-S-8-512 (Default Scenes: White, Red,Green, Blue, Light Blue, Purple, Pink, Dim White, Yellow, Cool Cycle, Warm Cycle, All Cycle, Rainbow Scroll, Blackout)	
ARTNET-S-REM-COMM-8	Remote DMX commissioning for artnet-s recorder up to 8 universes. Pixel mapping/control is not offered for remote commissioning
ARTNET-S-ONS-COMM-8	Onsite DMX commissioning for artnet-s recorder up to 8 universes (est. 3 days)
MADRIX DMX SYSTEM	
DMX-COMM-2U-MDRX	Onsite commissioning for madrix, up to 2 universes (est. 3 days)
DMX-COMM-8U-MDRX	Onsite commissioning for madrix, up to 8 universes (est. 3 days)
DMX-COMM-16U-MDRX	Onsite commissioning for madrix, up to 16 universes (est. 4 days)
DMX-COMM-24U-MDRX	Onsite commissioning for madrix, up to 24 universes (est. 4 days)
DMX-COMM-32U-MDRX	Onsite commissioning for madrix, up to 32 universes (est. 5 days)
32+ UNIVERSE	Contact factory

Copyright © Tivoli 09/28/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458