1-3 Wirect Connection | Small Gel Junction Box

- Connector up to 3 poles cables
- Internal terminal blocks supplied
- Water-resistant silicone gel enclosure
- Splice lead wires to create continuous power runs
- Cord anchorage strain relief


No. of Poles	3
Suggested Connection (max.)	3 × 1.5 mm²
Cable Diameter (min-max)	0.22"- 0.39" (5.5-10mm)
Max Voltage	250V
Amperage	10A
IP Rating	IP68
Certification	ETL

Order Information




GELJB-3-01-BK
3 Wire IP67 Gel Filled Junction Box
for lead wire size 5.5 - 10mm

Dimensions

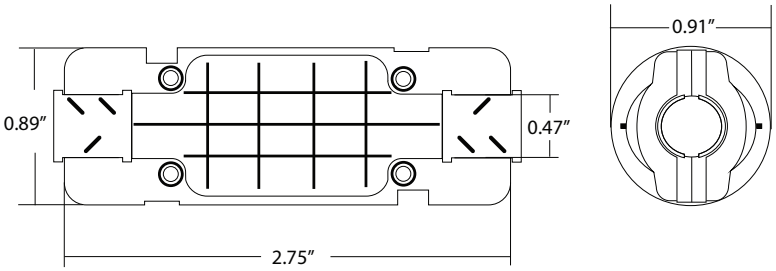

Guide and Tips

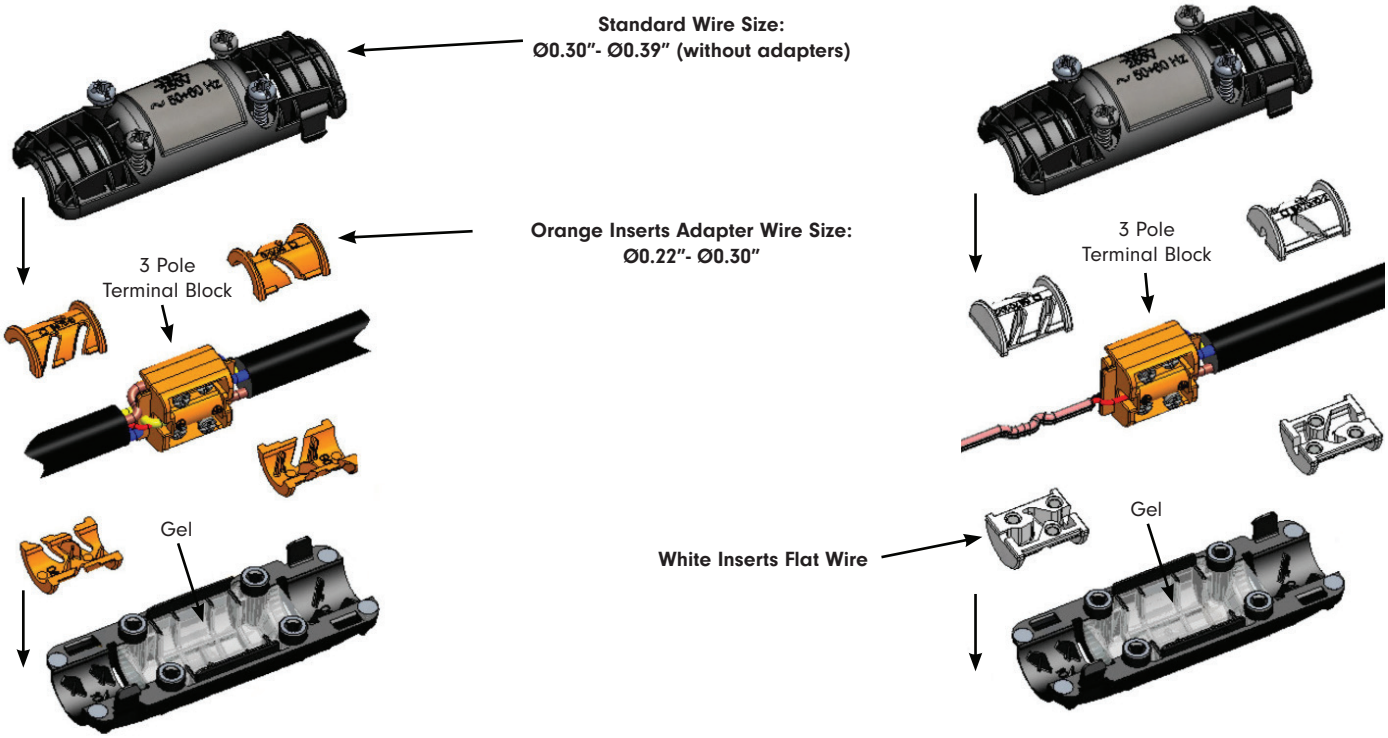

Tivoli, LLC. reserves the right to modify this specification without prior notice.

- Connector up to 3 poles cables
- Internal terminal blocks supplied
- Water-resistant silicone gel enclosure
- Splice lead wires to create continuous power runs
- Cord anchorage strain relief


No. of Poles	3
Suggested Connection (max.)	3 × 2.5 mm²
Cable Diameter (min-max)	0.26"- 0.47" (6.5-12mm)
Max Voltage	250V
Amperage	16A
IP Rating	IP68
Certification	ETL

Order Information




GELJB-3-02-BK
3 Wire IP67 Gel Filled Junction Box
for lead wire size 6.5 - 12mm

Dimensions

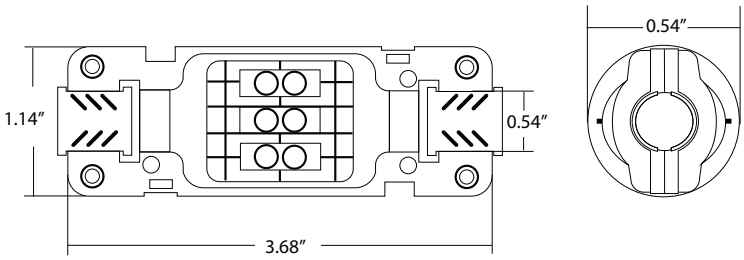

Guide and Tips

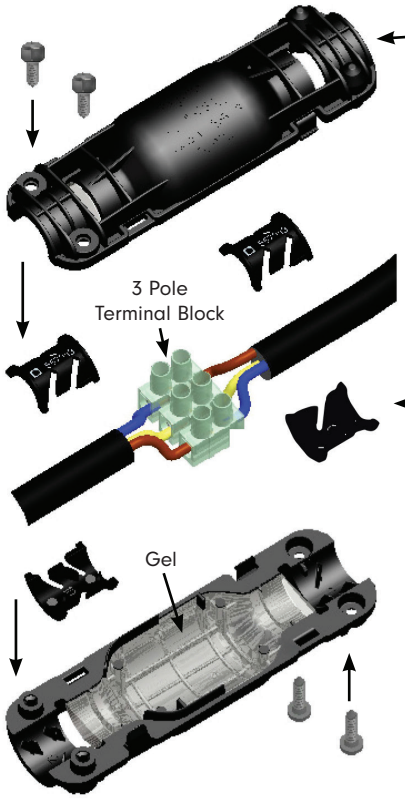

Standard Wire Size:
Ø0.34"- Ø0.47" (without adapters)

Black Insert Adapter Wire Size:
Ø0.26"- Ø0.34"

Tivoli, LLC. reserves the right to modify this specification without prior notice.

- Connector up to 5 poles cables
- Internal terminal blocks supplied
- Water-resistant silicone gel enclosure
- Splice lead wires to create continuous power runs
- Cord anchorage strain relief


No. of Poles	6
Suggested Connection (max.)	5 × 2.5 mm²
Cable Diameter (min-max)	0.3″- 0.63″ (7.5-16mm)
Max Voltage	450V
Amperage	25A
IP Rating	IP68
Certification	ETL

Order Information




GELJB-6-BK
6 Wire P67 Gel filled junction box for lead wire size 7.5 – 16mm

Dimensions

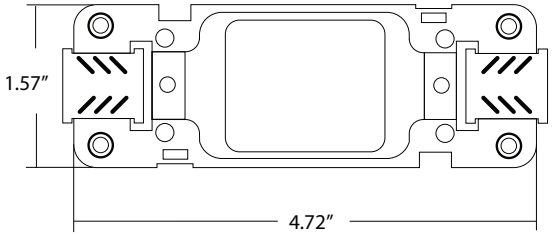

Guide and Tips

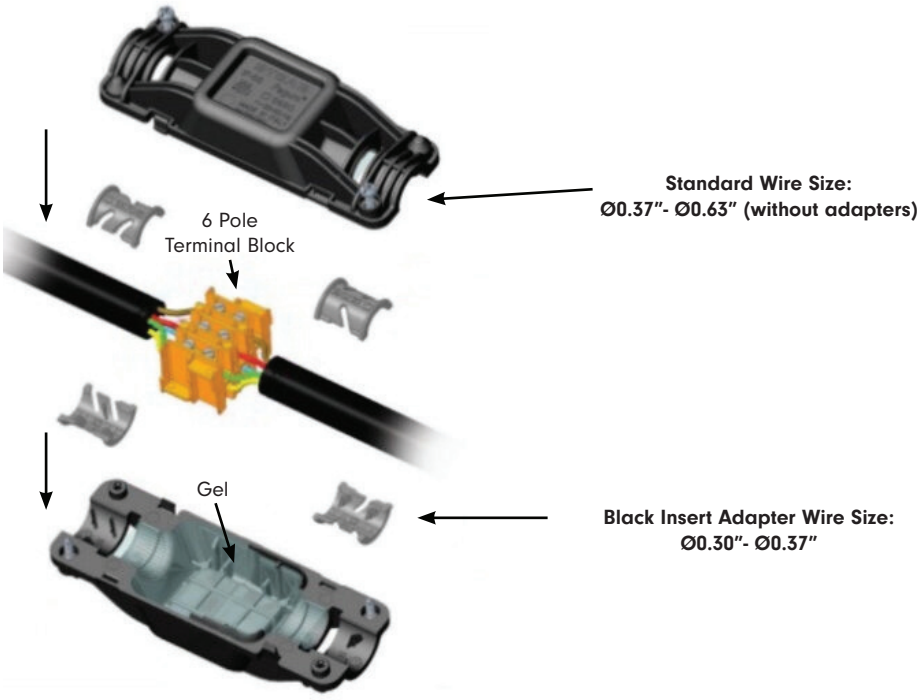

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 12/17/25

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458