tivoli®

TRACE

PRO Horizontal

Project: _____ Type: _____

- Horizontal bend configuration
- Constructed using flexible SMD LEDs with zero voltage drop for reliability and uniformity of light
- Factory molded power lead and end cap
- Used to outline structures or applications where traditional glass neon is used
- Low Voltage 24V DC
- Available in Non-Dimming or Dimming version
- Long-life LEDs with tight cutting increments for precise field installation
- UV Stabilized for exterior use with silicone housing (no yellowing or cracking)
- IP67 Rating
- IK10 Rating - protected against up to 20 joules of impact
- 1 Bin, 1.5 step color consistency

Dimensions

Front Lead

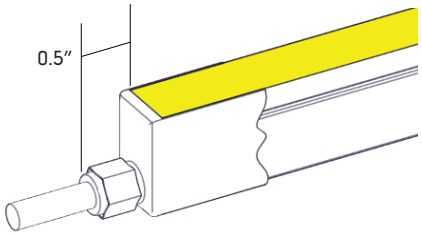

Side Lead

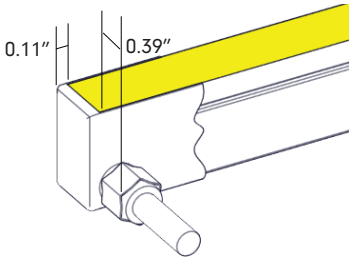

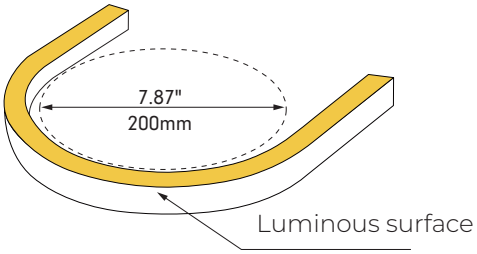

Bottom Lead

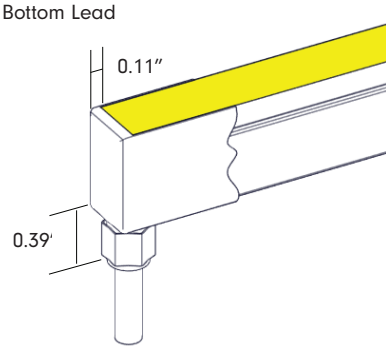

End-Cap





Tivoli, LLC. reserves the right to modify this specification without prior notice.

Order Guide

NOTE: Lengths and quantity of each run must be submitted at time of order.
TRACE Pro is factory prep only. In-field cutting will void warranty.

PRODUCT CODE	INTENSITY	PROFILE	LED COLOR	JACKET COLOR	END PREP 1	END PREP 2	VOLTAGE	LENGTH
TRCEPR		**H**					**24**	
TRCEPR = Trace Pro	L = Low Output S = Standard Output H = High Output	H = Horizontal	18 = 1800K 21 = 2100K 24 = 2400K 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K 65 = 6500K RD = Red GR = Green BL = Blue YL = Yellow OR = Orange PK = Pink	BLK = Black WHT = White	F1 = Front (Bare Wire) S1 = Side (Bare Wire) B1 = Bottom (Bare Wire) F2 = Front (M12 Water Proof) S2 = Side (M12 Water Proof) B2 = Bottom (M12 Water Proof) E = End Cap	F1 = Front (Bare Wire) S1 = Side (Bare Wire) B1 = Bottom (Bare Wire) F2 = Front (M12 Water Proof) S2 = Side (M12 Water Proof) B2 = Bottom (M12 Water Proof) E = End Cap	24 = 24V DC	See Chart

- Maximum Run length refers to single side feed in serial connection
- The given color temperature is the strip (after coating) color temperature
- The given data are typical values due to the tolerances of the production process and electrical components; values for the light output and electrical power can vary up to 10%

Specifications

1800K (+/- 100)	L	S	H
Lumens (lm/ft)	84.9	172.2	283.3
Power Consumption (W/ft)	1.5	3	4.5
Efficacy (lm/W)	54.4	53.6	51.8
Maximum Run	58'	29'	19'
CRI	>90		
R9	62		

2100K (+/- 150)	L	S	H
Lumens (lm/ft)	94.2	190.6	267.1
Power Consumption (W/ft)	1.5	3	4.5
Efficacy (lm/W)	60.2	59.6	57.4
Maximum Run	58'	29'	19'
CRI	>90		
R9	55		

2400K (+/- 100)	L	S	H
Lumens (lm/ft)	98.9	203.2	283.4
Power Consumption (W/ft)	1.5	3	4.5
Efficacy (lm/W)	63.3	63.5	61.2
Maximum Run	58'	29'	19'
CRI	>90		
R9	61		

2700K (+/- 100)	L	S	H
Lumens (lm/ft)	113.2	230.9	332.7
Power Consumption (W/ft)	1.5	3	4.5
Efficacy (lm/W)	73	73.4	72
Maximum Run	58'	29'	19'
CRI	>90		
R9	61		

3000K (+/- 100)	L	S	H
Lumens (lm/ft)	114.4	226	327.6
Power Consumption (W/ft)	1.5	3	4.5
Efficacy (lm/W)	73.6	71.4	70.4
Maximum Run	58'	29'	19'
CRI	>90		
R9	73		

3500K (+/- 100)	L	S	H
Lumens (lm/ft)	126.1	250.5	365.8
Power Consumption (W/ft)	1.5	3	4.5
Efficacy (lm/W)	81	78.9	78.7
Maximum Run	58'	29'	19'
CRI	>90		
R9	60		

4000K (+/- 100)	L	S	H
Lumens (lm/ft)	127.7	257.3	372.7
Power Consumption (W/ft)	1.5	3	4.5
Efficacy (lm/W)	82.4	80.8	80.9
Maximum Run	58'	29'	19'
CRI	>90		
R9	62		

5000K (+/- 250)	L	S	H
Lumens (lm/ft)	123.7	256	359.7
Power Consumption (W/ft)	1.5	3	4.5
Efficacy (lm/W)	79.7	80.2	77.7
Maximum Run	58'	29'	19'
CRI	>90		
R9	61		

6500K (+/- 450)	L	S	H
Lumens (lm/ft)	119	249.9	353.6
Power Consumption (W/ft)	1.5	3	4.5
Efficacy (lm/W)	76.7	78.2	76.5
Maximum Run	58'	29'	19'
CRI	>90		
R9	78		

Red (615nm - 625nm)	L	S	H
Lumens (lm/ft)	51.1	108.2	153.3
Power Consumption (W/ft)	1.5	3	4.5
Efficacy (lm/W)	32.9	34.4	33.1
Maximum Run	58'	29'	19'

Green (520nm - 530nm)	L	S	H
Lumens (lm/ft)	127.5	241.9	355.8
Power Consumption (W/ft)	1.5	3	4.5
Efficacy (lm/W)	81.6	75.7	76.9
Maximum Run	58'	29'	19'

Blue (460nm - 470nm)	L	S	H
Lumens (lm/ft)	24.7	46.4	61.7
Power Consumption (W/ft)	1.5	3	4.5
Efficacy (lm/W)	15.9	14.5	13.3
Maximum Run	58'	29'	19'

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Specifications

Yellow (585nm - 595nm)	L	S	H
Lumens (lm/ft)	37.2	74.2	99.4
Power Consumption (W/ft)	1.5	3	4.5
Efficacy (lm/W)	23.8	23.3	21.5
Maximum Run	58'	29'	19'

Orange (595nm - 605nm)	L	S	H
Lumens (lm/ft)	43.5	90.8	123.8
Power Consumption (W/ft)	1.5	3	4.5
Efficacy (lm/W)	28.1	28.5	26.8
Maximum Run	58'	29'	19'

Pink - (495nm - 505nm)	L	S	H
Lumens (lm/ft)	101.9	204.6	276.2
Power Consumption (W/ft)	1.5	3	4.5
Efficacy (lm/W)	65.4	64.1	59.9
Maximum Run	53'	29'	17'

Overall Specifications

Physical	
LEDs	2835
Beam Angle	115.8°
Dimensions	0.62" (16mm) x 0.66" (17mm)
Cutting Increments	2"
Material	UV, Solvent, Saltwater resistant silicone
LED PIN Temperature Max	65°C (149°F)
Storage Temperature	-25°C (-13°F) ~ 60°C (140°F)
Ambient Temperature 1.5W	-25°C (-13°F) ~ 55°C (131°F)
Ambient Temperature 3W	-25°C (-13°F) ~ 45°C (113°F)
Ambient Temperature 4.5W	-25°C (-13°F) ~ 35°C (95°F)

- The given data are typical values due to the tolerances of the production process and electrical components; values for the light output and electrical power can vary up to 10%

Electrical	
Dimming	TRIAC, ELV, MLV, 0-10V, DMX
Input Voltage	24V DC
Certification and Testing	
Certification	cULus, IK10
Rated Life L70/hrs	54,000
Environment	Wet Location
IP Rating	IP67
Warranty	5 Years

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Molded End-Prep Example



FRONT (F1,F2)
Front Lead Entry
10' Power Lead Cable with End Cap



SIDE (S1, S2)
Side Lead Entry
10' Power Lead Cable with End Cap



BOTTOM (B1, B2)
Bottom Lead Entry
10' Power Lead Cable with End Cap



END CAP (E)
End Cap (No Lead)
1 pc End Cap

Molded Power Lead Configurations



B-B
Left Facing Bottom Lead
Right Facing Bottom Lead



F-F
Left Facing Front Lead
Right Facing Front Lead



S-S
Left Facing Side Lead
Right Facing Side Lead



B-F
Left Facing Bottom Lead
Right Facing Front Lead



F-B
Left Facing Front Lead
Right Facing Bottom Lead



S-F
Left Facing Side Lead
Right Facing Front Lead



F-S
Left Facing Front Lead
Right Facing Side Lead



B-S
Left Facing Bottom Lead
Right Facing Side Lead



S-B
Left Facing Side Lead
Right Facing Bottom Lead



B-E
Left Facing Bottom Lead
Right End Cap



E-F
Left End Cap Lead
Right Facing Front Lead



F-E
Left Facing Front Lead
Right End Cap



E-S
Left Facing End Cap Lead
Right Facing Side Lead



S-E
Left Facing Side Lead
Right Facing End Cap

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Length Order Guide (Front - Front)

Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below
Total product length received will include added end-prep of choice within a tolerance (±in 0.275) - See example (B) below

Example (A)



Example (B)

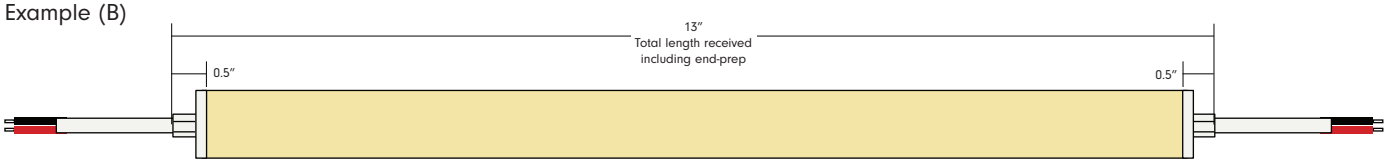

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
006	13	1.08	1.50	3.00	4.50	1
007	15	1.25	1.75	3.50	5.25	
008	17	1.42	2.00	4.00	6.00	
009	19	1.58	2.25	4.50	6.75	
010	21	1.75	2.50	5.00	7.50	
011	23	1.92	2.75	5.50	8.25	
012	25	2.08	3.00	6.00	9.00	2
013	27	2.25	3.25	6.50	9.75	
014	29	2.42	3.50	7.00	10.50	
015	31	2.58	3.75	7.50	11.25	
016	33	2.75	4.00	8.00	12.00	
017	35	2.92	4.25	8.50	12.75	
018	37	3.08	4.50	9.00	13.50	3
019	39	3.25	4.75	9.50	14.25	
020	41	3.42	5.00	10.00	15.00	
021	43	3.58	5.25	10.50	15.75	
022	45	3.75	5.50	11.00	16.50	
023	47	3.92	5.75	11.50	17.25	
024	49	4.08	6.00	12.00	18.00	4
025	51	4.25	6.25	12.50	18.75	
026	53	4.42	6.50	13.00	19.50	
027	55	4.58	6.75	13.50	20.25	
028	57	4.75	7.00	14.00	21.00	
029	59	4.92	7.25	14.50	21.75	
030	61	5.08	7.50	15.00	22.50	5
031	63	5.25	7.75	15.50	23.25	
032	65	5.42	8.00	16.00	24.00	
033	67	5.58	8.25	16.50	24.75	
034	69	5.75	8.50	17.00	25.50	
035	71	5.92	8.75	17.50	26.25	
036	73	6.08	9.00	18.00	27.00	6
037	75	6.25	9.25	18.50	27.75	
038	77	6.42	9.50	19.00	28.50	
039	79	6.58	9.75	19.50	29.25	
040	81	6.75	10.00	20.00	30.00	
041	83	6.92	10.25	20.50	30.75	
042	85	7.08	10.50	21.00	31.50	7
043	87	7.25	10.75	21.50	32.25	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
044	89	7.42	11.00	22.00	33.00	
045	91	7.58	11.25	22.50	33.75	
046	93	7.75	11.50	23.00	34.50	
047	95	7.92	11.75	23.50	35.25	
048	97	8.08	12.00	24.00	36.00	8
049	99	8.25	12.25	24.50	36.75	
050	101	8.42	12.50	25.00	37.50	
051	103	8.58	12.75	25.50	38.25	
052	105	8.75	13.00	26.00	39.00	
053	107	8.92	13.25	26.50	39.75	
054	109	9.08	13.50	27.00	40.50	9
055	111	9.25	13.75	27.50	41.25	
056	113	9.42	14.00	28.00	42.00	
057	115	9.58	14.25	28.50	42.75	
058	117	9.75	14.50	29.00	43.50	
059	119	9.92	14.75	29.50	44.25	
060	121	10.08	15.00	30.00	45.00	10
061	123	10.25	15.25	30.50	45.75	
062	125	10.42	15.50	31.00	46.50	
063	127	10.58	15.75	31.50	47.25	
064	129	10.75	16.00	32.00	48.00	
065	131	10.92	16.25	32.50	48.75	
066	133	11.08	16.50	33.00	49.50	11
067	135	11.25	16.75	33.50	50.25	
068	137	11.42	17.00	34.00	51.00	
069	139	11.58	17.25	34.50	51.75	
070	141	11.75	17.50	35.00	52.50	
071	143	11.92	17.75	35.50	53.25	
072	145	12.08	18.00	36.00	54.00	12
073	147	12.25	18.25	36.50	54.75	
074	149	12.42	18.50	37.00	55.50	
075	151	12.58	18.75	37.50	56.25	
076	153	12.75	19.00	38.00	57.00	
077	155	12.92	19.25	38.50	57.75	
078	157	13.08	19.50	39.00	58.50	13
079	159	13.25	19.75	39.50	59.25	
080	161	13.42	20.00	40.00	60.00	
081	163	13.58	20.25	40.50	60.75	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
082	165	13.75	20.50	41.00	61.50	
083	167	13.92	20.75	41.50	62.25	
084	169	14.08	21.00	42.00	63.00	14
085	171	14.25	21.25	42.50	63.75	
086	173	14.42	21.50	43.00	64.50	
087	175	14.58	21.75	43.50	65.25	
088	177	14.75	22.00	44.00	66.00	
089	179	14.92	22.25	44.50	66.75	
090	181	15.08	22.50	45.00	67.50	15
091	183	15.25	22.75	45.50	68.25	
092	185	15.42	23.00	46.00	69.00	
093	187	15.58	23.25	46.50	69.75	
094	189	15.75	23.50	47.00	70.50	
095	191	15.92	23.75	47.50	71.25	
096	193	16.08	24.00	48.00	72.00	16
097	195	16.25	24.25	48.50	72.75	
098	197	16.42	24.50	49.00	73.50	
099	199	16.58	24.75	49.50	74.25	
100	201	16.75	25.00	50.00	75.00	
101	203	16.92	25.25	50.50	75.75	
102	205	17.08	25.50	51.00	76.50	17
103	207	17.25	25.75	51.50	77.25	
104	209	17.42	26.00	52.00	78.00	
105	211	17.58	26.25	52.50	78.75	
106	213	17.75	26.50	53.00	79.50	
107	215	17.92	26.75	53.50	80.25	
108	217	18.08	27.00	54.00	81.00	18
109	219	18.25	27.25	54.50	81.75	
110	221	18.42	27.50	55.00	82.50	
111	223	18.58	27.75	55.50	83.25	
112	225	18.75	28.00	56.00	84.00	
113	227	18.92	28.25	56.50	84.75	
114	229	19.08	28.50	57.00	85.50	19
115	231	19.25	28.75	57.50	X	
116	233	19.42	29.00	58.00	X	
117	235	19.58	29.25	58.50	X	
118	237	19.75	29.50	59.00	X	
119	239	19.92	29.75	59.50	X	

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 08/26/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Length Order Guide (Front - Front)

Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below
Total product length received will include added end-prep of choice within a tolerance (±in 0.275) - See example (B) below

Example (A)



Example (B)

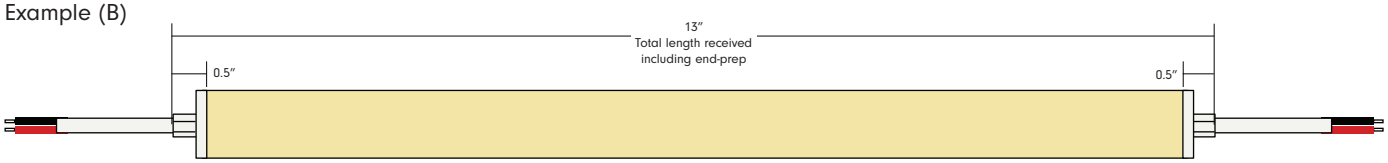

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
120	241	20.08	30.00	60.00	X	20
121	243	20.25	30.25	60.50	X	
122	245	20.42	30.50	61.00	X	
123	247	20.58	30.75	61.50	X	
124	249	20.75	31.00	62.00	X	
125	251	20.92	31.25	62.50	X	
126	253	21.08	31.50	63.00	X	21
127	255	21.25	31.75	63.50	X	
128	257	21.42	32.00	64.00	X	
129	259	21.58	32.25	64.50	X	
130	261	21.75	32.50	65.00	X	
131	263	21.92	32.75	65.50	X	
132	265	22.08	33.00	66.00	X	22
133	267	22.25	33.25	66.50	X	
134	269	22.42	33.50	67.00	X	
135	271	22.58	33.75	67.50	X	
136	273	22.75	34.00	68.00	X	
137	275	22.92	34.25	68.50	X	
138	277	23.08	34.50	69.00	X	23
139	279	23.25	34.75	69.50	X	
140	281	23.42	35.00	70.00	X	
141	283	23.58	35.25	70.50	X	
142	285	23.75	35.50	71.00	X	
143	287	23.92	35.75	71.50	X	
144	289	24.08	36.00	72.00	X	24
145	291	24.25	36.25	72.50	X	
146	293	24.42	36.50	73.00	X	
147	295	24.58	36.75	73.50	X	
148	297	24.75	37.00	74.00	X	
149	299	24.92	37.25	74.50	X	
150	301	25.08	37.50	75.00	X	25
151	303	25.25	37.75	75.50	X	
152	305	25.42	38.00	76.00	X	
153	307	25.58	38.25	76.50	X	
154	309	25.75	38.50	77.00	X	
155	311	25.92	38.75	77.50	X	
156	313	26.08	39.00	78.00	X	26
157	315	26.25	39.25	78.50	X	
158	317	26.42	39.50	79.00	X	
159	319	26.58	39.75	79.50	X	
160	321	26.75	40.00	80.00	X	
161	323	26.92	40.25	80.50	X	
162	325	27.08	40.50	81.00	X	27
163	327	27.25	40.75	81.50	X	
164	329	27.42	41.00	82.00	X	
165	331	27.58	41.25	82.50	X	
166	333	27.75	41.50	83.00	X	
167	335	27.92	41.75	83.50	X	
168	337	28.08	42.00	84.00	X	28
169	339	28.25	42.25	84.50	X	
170	341	28.42	42.50	85.00	X	
171	343	28.58	42.75	85.50	X	
172	345	28.75	43.00	86.00	X	
173	347	28.92	43.25	86.50	X	
174	349	29.08	43.50	87.00	X	29
175	351	29.25	43.75	X	X	
176	353	29.42	44.00	X	X	
177	355	29.58	44.25	X	X	
178	357	29.75	44.50	X	X	
179	359	29.92	44.75	X	X	
180	361	30.08	45.00	X	X	30
181	363	30.25	45.25	X	X	
182	365	30.42	45.50	X	X	
183	367	30.58	45.75	X	X	
184	369	30.75	46.00	X	X	
185	371	30.92	46.25	X	X	
186	373	31.08	46.50	X	X	31
187	375	31.25	46.75	X	X	
188	377	31.42	47.00	X	X	
189	379	31.58	47.25	X	X	
190	381	31.75	47.50	X	X	
191	383	31.92	47.75	X	X	
192	385	32.08	48.00	X	X	32
193	387	32.25	48.25	X	X	
194	389	32.42	48.50	X	X	
195	391	32.58	48.75	X	X	
196	393	32.75	49.00	X	X	
197	395	32.92	49.25	X	X	
198	397	33.08	49.50	X	X	33
199	399	33.25	49.75	X	X	
200	401	33.42	50.00	X	X	
201	403	33.58	50.25	X	X	
202	405	33.75	50.50	X	X	
203	407	33.92	50.75	X	X	
204	409	34.08	51.00	X	X	34
205	411	34.25	51.25	X	X	
206	413	34.42	51.50	X	X	
207	415	34.58	51.75	X	X	
208	417	34.75	52.00	X	X	
209	419	34.92	52.25	X	X	
210	421	35.08	52.50	X	X	35
211	423	35.25	52.75	X	X	
212	425	35.42	53.00	X	X	
213	427	35.58	53.25	X	X	
214	429	35.75	53.50	X	X	
215	431	35.92	53.75	X	X	
216	433	36.08	54.00	X	X	36
217	435	36.25	54.25	X	X	
218	437	36.42	54.50	X	X	
219	439	36.58	54.75	X	X	
220	441	36.75	55.00	X	X	
221	443	36.92	55.25	X	X	
222	445	37.08	55.50	X	X	37
223	447	37.25	55.75	X	X	
224	449	37.42	56.00	X	X	
225	451	37.58	56.25	X	X	
226	453	37.75	56.50	X	X	
227	455	37.92	56.75	X	X	
228	457	38.08	57.00	X	X	38
229	459	38.25	57.25	X	X	
230	461	38.42	57.50	X	X	
231	463	38.58	57.75	X	X	
232	465	38.75	58.00	X	X	
233	467	38.92	58.25	X	X	

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Length Order Guide (Front - Front)

Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below
Total product length received will include added end-prep of choice within a tolerance (±in 0.275) - See example (B) below

Example (A)



Example (B)

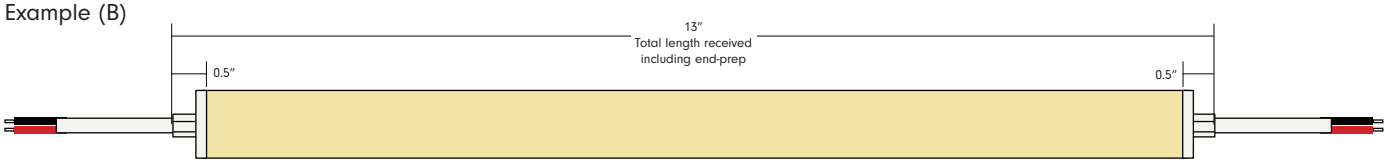

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
234	469	39.08	58.50	X	X	39
235	471	39.25	58.75	X	X	
236	473	39.42	59.00	X	X	
237	475	39.58	59.25	X	X	
238	477	39.75	59.50	X	X	
239	479	39.92	59.75	X	X	
240	481	40.08	60.00	X	X	40
241	483	40.25	60.25	X	X	
242	485	40.42	60.50	X	X	
243	487	40.58	60.75	X	X	
244	489	40.75	61.00	X	X	
245	491	40.92	61.25	X	X	
246	493	41.08	61.50	X	X	41
247	495	41.25	61.75	X	X	
248	497	41.42	62.00	X	X	
249	499	41.58	62.25	X	X	
250	501	41.75	62.50	X	X	
251	503	41.92	62.75	X	X	
252	505	42.08	63.00	X	X	42
253	507	42.25	63.25	X	X	
254	509	42.42	63.50	X	X	
255	511	42.58	63.75	X	X	
256	513	42.75	64.00	X	X	
257	515	42.92	64.25	X	X	
258	517	43.08	64.50	X	X	43
259	519	43.25	64.75	X	X	
260	521	43.42	65.00	X	X	
261	523	43.58	65.25	X	X	
262	525	43.75	65.50	X	X	
263	527	43.92	65.75	X	X	
264	529	44.08	66.00	X	X	44
265	531	44.25	66.25	X	X	
266	533	44.42	66.50	X	X	
267	535	44.58	66.75	X	X	
268	537	44.75	67.00	X	X	
269	539	44.92	67.25	X	X	
270	541	45.08	67.50	X	X	45
271	543	45.25	67.75	X	X	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
272	545	45.42	68.00	X	X	
273	547	45.58	68.25	X	X	
274	549	45.75	68.50	X	X	
275	551	45.92	68.75	X	X	
276	553	46.08	69.00	X	X	46
277	555	46.25	69.25	X	X	
278	557	46.42	69.50	X	X	
279	559	46.58	69.75	X	X	
280	561	46.75	70.00	X	X	
281	563	46.92	70.25	X	X	
282	565	47.08	70.50	X	X	47
283	567	47.25	70.75	X	X	
284	569	47.42	71.00	X	X	
285	571	47.58	71.25	X	X	
286	573	47.75	71.50	X	X	
287	575	47.92	71.75	X	X	
288	577	48.08	72.00	X	X	48
289	579	48.25	72.25	X	X	
290	581	48.42	72.50	X	X	
291	583	48.58	72.75	X	X	
292	585	48.75	73.00	X	X	
293	587	48.92	73.25	X	X	
294	589	49.08	73.50	X	X	49
295	591	49.25	73.75	X	X	
296	593	49.42	74.00	X	X	
297	595	49.58	74.25	X	X	
298	597	49.75	74.50	X	X	
299	599	49.92	74.75	X	X	
300	601	50.08	75.00	X	X	50
301	603	50.25	75.25	X	X	
302	605	50.42	75.50	X	X	
303	607	50.58	75.75	X	X	
304	609	50.75	76.00	X	X	
305	611	50.92	76.25	X	X	
306	613	51.08	76.50	X	X	51
307	615	51.25	76.75	X	X	
308	617	51.42	77.00	X	X	
309	619	51.58	77.25	X	X	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
310	621	51.75	77.50	X	X	
311	623	51.92	77.75	X	X	
312	625	52.08	78.00	X	X	52
313	627	52.25	78.25	X	X	
314	629	52.42	78.50	X	X	
315	631	52.58	78.75	X	X	
316	633	52.75	79.00	X	X	
317	635	52.92	79.25	X	X	
318	637	53.08	79.50	X	X	53
319	639	53.25	79.75	X	X	
320	641	53.42	80.00	X	X	
321	643	53.58	80.25	X	X	
322	645	53.75	80.50	X	X	
323	647	53.92	80.75	X	X	
324	649	54.08	81.00	X	X	54
325	651	54.25	81.25	X	X	
326	653	54.42	81.50	X	X	
327	655	54.58	81.75	X	X	
328	657	54.75	82.00	X	X	
329	659	54.92	82.25	X	X	
330	661	55.08	82.50	X	X	55
331	663	55.25	82.75	X	X	
332	665	55.42	83.00	X	X	
333	667	55.58	83.25	X	X	
334	669	55.75	83.50	X	X	
335	671	55.92	83.75	X	X	
336	673	56.08	84.00	X	X	56
337	675	56.25	84.25	X	X	
338	677	56.42	84.50	X	X	
339	679	56.58	84.75	X	X	
340	681	56.75	85.00	X	X	
341	683	56.92	85.25	X	X	
342	685	57.08	85.50	X	X	57
343	687	57.25	85.75	X	X	
344	689	57.42	86.00	X	X	
345	691	57.58	86.25	X	X	
346	693	57.75	86.50	X	X	
347	695	57.92	86.75	X	X	
348	697	58.08	87.00	X	X	58

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Length Order Guide (Front - Bottom/Side/End Cap)

Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below
Total product length received will include added end-prep of choice within a tolerance (±in 0.275) - See example (B) below

Example (A)

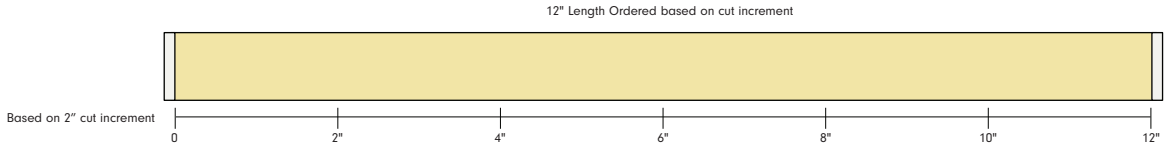

Example (B)

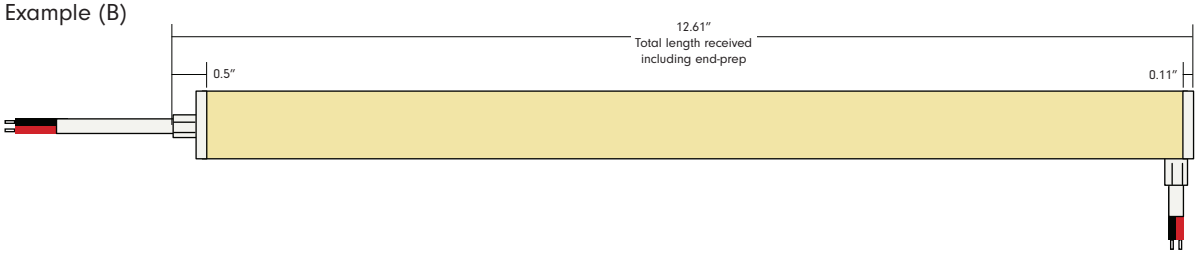

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
006	12.61	1.05	1.50	3.00	4.50	1
007	14.61	1.22	1.75	3.50	5.25	
008	16.61	1.38	2.00	4.00	6.00	
009	18.61	1.55	2.25	4.50	6.75	
010	20.61	1.72	2.50	5.00	7.50	
011	22.61	1.88	2.75	5.50	8.25	
012	24.61	2.05	3.00	6.00	9.00	2
013	26.61	2.22	3.25	6.50	9.75	
014	28.61	2.38	3.50	7.00	10.50	
015	30.61	2.55	3.75	7.50	11.25	
016	32.61	2.72	4.00	8.00	12.00	
017	34.61	2.88	4.25	8.50	12.75	
018	36.61	3.05	4.50	9.00	13.50	3
019	38.61	3.22	4.75	9.50	14.25	
020	40.61	3.38	5.00	10.00	15.00	
021	42.61	3.55	5.25	10.50	15.75	
022	44.61	3.72	5.50	11.00	16.50	
023	46.61	3.88	5.75	11.50	17.25	
024	48.61	4.05	6.00	12.00	18.00	4
025	50.61	4.22	6.25	12.50	18.75	
026	52.61	4.38	6.50	13.00	19.50	
027	54.61	4.55	6.75	13.50	20.25	
028	56.61	4.72	7.00	14.00	21.00	
029	58.61	4.88	7.25	14.50	21.75	
030	60.61	5.05	7.50	15.00	22.50	5
031	62.61	5.22	7.75	15.50	23.25	
032	64.61	5.38	8.00	16.00	24.00	
033	66.61	5.55	8.25	16.50	24.75	
034	68.61	5.72	8.50	17.00	25.50	
035	70.61	5.88	8.75	17.50	26.25	
036	72.61	6.05	9.00	18.00	27.00	6
037	74.61	6.22	9.25	18.50	27.75	
038	76.61	6.38	9.50	19.00	28.50	
039	78.61	6.55	9.75	19.50	29.25	
040	80.61	6.72	10.00	20.00	30.00	
041	82.61	6.88	10.25	20.50	30.75	
042	84.61	7.05	10.50	21.00	31.50	7
043	86.61	7.22	10.75	21.50	32.25	
044	88.61	7.38	11.00	22.00	33.00	
045	90.61	7.55	11.25	22.50	33.75	
046	92.61	7.72	11.50	23.00	34.50	
047	94.61	7.88	11.75	23.50	35.25	
048	96.61	8.05	12.00	24.00	36.00	8
049	98.61	8.22	12.25	24.50	36.75	
050	100.61	8.38	12.50	25.00	37.50	
051	102.61	8.55	12.75	25.50	38.25	
052	104.61	8.72	13.00	26.00	39.00	
053	106.61	8.88	13.25	26.50	39.75	
054	108.61	9.05	13.50	27.00	40.50	9
055	110.61	9.22	13.75	27.50	41.25	
056	112.61	9.38	14.00	28.00	42.00	
057	114.61	9.55	14.25	28.50	42.75	
058	116.61	9.72	14.50	29.00	43.50	
059	118.61	9.88	14.75	29.50	44.25	
060	120.61	10.05	15.00	30.00	45.00	10
061	122.61	10.22	15.25	30.50	45.75	
062	124.61	10.38	15.50	31.00	46.50	
063	126.61	10.55	15.75	31.50	47.25	
064	128.61	10.72	16.00	32.00	48.00	
065	130.61	10.88	16.25	32.50	48.75	
066	132.61	11.05	16.50	33.00	49.50	11
067	134.61	11.22	16.75	33.50	50.25	
068	136.61	11.38	17.00	34.00	51.00	
069	138.61	11.55	17.25	34.50	51.75	
070	140.61	11.72	17.50	35.00	52.50	
071	142.61	11.88	17.75	35.50	53.25	
072	144.61	12.05	18.00	36.00	54.00	12
073	146.61	12.22	18.25	36.50	54.75	
074	148.61	12.38	18.50	37.00	55.50	
075	150.61	12.55	18.75	37.50	56.25	
076	152.61	12.72	19.00	38.00	57.00	
077	154.61	12.88	19.25	38.50	57.75	
078	156.61	13.05	19.50	39.00	58.50	13
079	158.61	13.22	19.75	39.50	59.25	
080	160.61	13.38	20.00	40.00	60.00	
081	162.61	13.55	20.25	40.50	60.75	
082	164.61	13.72	20.50	41.00	61.50	
083	166.61	13.88	20.75	41.50	62.25	
084	168.61	14.05	21.00	42.00	63.00	14
085	170.61	14.22	21.25	42.50	63.75	
086	172.61	14.38	21.50	43.00	64.50	
087	174.61	14.55	21.75	43.50	65.25	
088	176.61	14.72	22.00	44.00	66.00	
089	178.61	14.88	22.25	44.50	66.75	
090	180.61	15.05	22.50	45.00	67.50	15
091	182.61	15.22	22.75	45.50	68.25	
092	184.61	15.38	23.00	46.00	69.00	
093	186.61	15.55	23.25	46.50	69.75	
094	188.61	15.72	23.50	47.00	70.50	
095	190.61	15.88	23.75	47.50	71.25	
096	192.61	16.05	24.00	48.00	72.00	16
097	194.61	16.22	24.25	48.50	72.75	
098	196.61	16.38	24.50	49.00	73.50	
099	198.61	16.55	24.75	49.50	74.25	
100	200.61	16.72	25.00	50.00	75.00	
101	202.61	16.88	25.25	50.50	75.75	
102	204.61	17.05	25.50	51.00	76.50	17
103	206.61	17.22	25.75	51.50	77.25	
104	208.61	17.38	26.00	52.00	78.00	
105	210.61	17.55	26.25	52.50	78.75	
106	212.61	17.72	26.50	53.00	79.50	
107	214.61	17.88	26.75	53.50	80.25	
108	216.61	18.05	27.00	54.00	81.00	18
109	218.61	18.22	27.25	54.50	81.75	
110	220.61	18.38	27.50	55.00	82.50	
111	222.61	18.55	27.75	55.50	83.25	
112	224.61	18.72	28.00	56.00	84.00	
113	226.61	18.88	28.25	56.50	84.75	
114	228.61	19.05	28.50	57.00	85.50	19
115	230.61	19.22	28.75	57.50	X	
116	232.61	19.38	29.00	58.00	X	
117	234.61	19.55	29.25	58.50	X	
118	236.61	19.72	29.50	59.00	X	
119	238.61	19.88	29.75	59.50	X	

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Length Order Guide (Front - Bottom/Side/End Cap)

Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below
Total product length received will include added end-prep of choice within a tolerance (±in 0.275) - See example (B) below

Example (A)

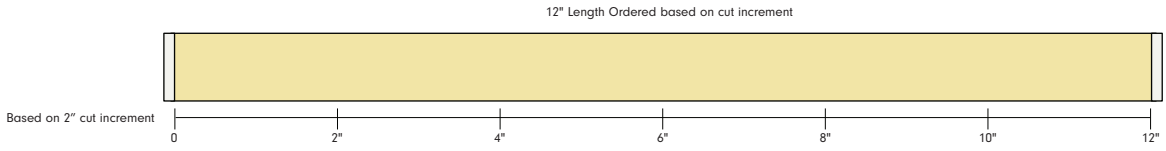

Example (B)

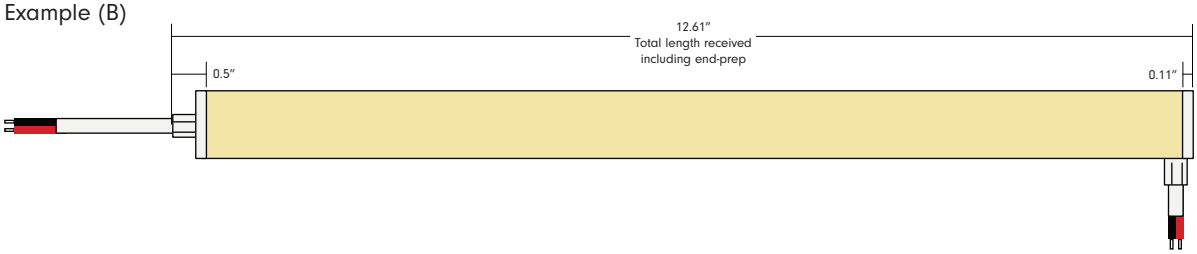

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
120	240.61	20.05	30.00	60.00	X	20
121	242.61	20.22	30.25	60.50	X	
122	244.61	20.38	30.50	61.00	X	
123	246.61	20.55	30.75	61.50	X	
124	248.61	20.72	31.00	62.00	X	
125	250.61	20.88	31.25	62.50	X	
126	252.61	21.05	31.50	63.00	X	21
127	254.61	21.22	31.75	63.50	X	
128	256.61	21.38	32.00	64.00	X	
129	258.61	21.55	32.25	64.50	X	
130	260.61	21.72	32.50	65.00	X	
131	262.61	21.88	32.75	65.50	X	
132	264.61	22.05	33.00	66.00	X	22
133	266.61	22.22	33.25	66.50	X	
134	268.61	22.38	33.50	67.00	X	
135	270.61	22.55	33.75	67.50	X	
136	272.61	22.72	34.00	68.00	X	
137	274.61	22.88	34.25	68.50	X	
138	276.61	23.05	34.50	69.00	X	23
139	278.61	23.22	34.75	69.50	X	
140	280.61	23.38	35.00	70.00	X	
141	282.61	23.55	35.25	70.50	X	
142	284.61	23.72	35.50	71.00	X	
143	286.61	23.88	35.75	71.50	X	
144	288.61	24.05	36.00	72.00	X	24
145	290.61	24.22	36.25	72.50	X	
146	292.61	24.38	36.50	73.00	X	
147	294.61	24.55	36.75	73.50	X	
148	296.61	24.72	37.00	74.00	X	
149	298.61	24.88	37.25	74.50	X	
150	300.61	25.05	37.50	75.00	X	25
151	302.61	25.22	37.75	75.50	X	
152	304.61	25.38	38.00	76.00	X	
153	306.61	25.55	38.25	76.50	X	
154	308.61	25.72	38.50	77.00	X	
155	310.61	25.88	38.75	77.50	X	
156	312.61	26.05	39.00	78.00	X	26
157	314.61	26.22	39.25	78.50	X	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
158	316.61	26.38	39.50	79.00	X	
159	318.61	26.55	39.75	79.50	X	
160	320.61	26.72	40.00	80.00	X	
161	322.61	26.88	40.25	80.50	X	
162	324.61	27.05	40.50	81.00	X	27
163	326.61	27.22	40.75	81.50	X	
164	328.61	27.38	41.00	82.00	X	
165	330.61	27.55	41.25	82.50	X	
166	332.61	27.72	41.50	83.00	X	
167	334.61	27.88	41.75	83.50	X	
168	336.61	28.05	42.00	84.00	X	28
169	338.61	28.22	42.25	84.50	X	
170	340.61	28.38	42.50	85.00	X	
171	342.61	28.55	42.75	85.50	X	
172	344.61	28.72	43.00	86.00	X	
173	346.61	28.88	43.25	86.50	X	
174	348.61	29.05	43.50	87.00	X	29
175	350.61	29.22	43.75	X	X	
176	352.61	29.38	44.00	X	X	
177	354.61	29.55	44.25	X	X	
178	356.61	29.72	44.50	X	X	
179	358.61	29.88	44.75	X	X	
180	360.61	30.05	45.00	X	X	30
181	362.61	30.22	45.25	X	X	
182	364.61	30.38	45.50	X	X	
183	366.61	30.55	45.75	X	X	
184	368.61	30.72	46.00	X	X	
185	370.61	30.88	46.25	X	X	
186	372.61	31.05	46.50	X	X	31
187	374.61	31.22	46.75	X	X	
188	376.61	31.38	47.00	X	X	
189	378.61	31.55	47.25	X	X	
190	380.61	31.72	47.50	X	X	
191	382.61	31.88	47.75	X	X	
192	384.61	32.05	48.00	X	X	32
193	386.61	32.22	48.25	X	X	
194	388.61	32.38	48.50	X	X	
195	390.61	32.55	48.75	X	X	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
196	392.61	32.72	49.00	X	X	
197	394.61	32.88	49.25	X	X	
198	396.61	33.05	49.50	X	X	33
199	398.61	33.22	49.75	X	X	
200	400.61	33.38	50.00	X	X	
201	402.61	33.55	50.25	X	X	
202	404.61	33.72	50.50	X	X	
203	406.61	33.88	50.75	X	X	
204	408.61	34.05	51.00	X	X	34
205	410.61	34.22	51.25	X	X	
206	412.61	34.38	51.50	X	X	
207	414.61	34.55	51.75	X	X	
208	416.61	34.72	52.00	X	X	
209	418.61	34.88	52.25	X	X	
210	420.61	35.05	52.50	X	X	35
211	422.61	35.22	52.75	X	X	
212	424.61	35.38	53.00	X	X	
213	426.61	35.55	53.25	X	X	
214	428.61	35.72	53.50	X	X	
215	430.61	35.88	53.75	X	X	
216	432.61	36.05	54.00	X	X	36
217	434.61	36.22	54.25	X	X	
218	436.61	36.38	54.50	X	X	
219	438.61	36.55	54.75	X	X	
220	440.61	36.72	55.00	X	X	
221	442.61	36.88	55.25	X	X	
222	444.61	37.05	55.50	X	X	37
223	446.61	37.22	55.75	X	X	
224	448.61	37.38	56.00	X	X	
225	450.61	37.55	56.25	X	X	
226	452.61	37.72	56.50	X	X	
227	454.61	37.88	56.75	X	X	
228	456.61	38.05	57.00	X	X	38
229	458.61	38.22	57.25	X	X	
230	460.61	38.38	57.50	X	X	
231	462.61	38.55	57.75	X	X	
232	464.61	38.72	58.00	X	X	
233	466.61	38.88	58.25	X	X	

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Length Order Guide (Front - Bottom/Side/End Cap)

Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below
Total product length received will include added end-prep of choice within a tolerance (±in 0.275) - See example (B) below

Example (A)

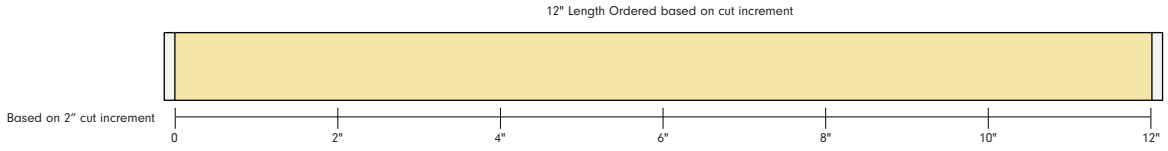

Example (B)

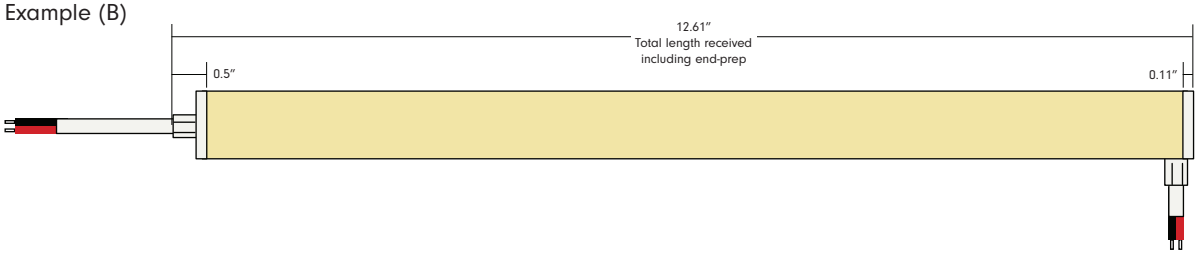

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
234	468.61	39.05	58.50	X	X	39
235	470.61	39.22	58.75	X	X	
236	472.61	39.38	59.00	X	X	
237	474.61	39.55	59.25	X	X	
238	476.61	39.72	59.50	X	X	
239	478.61	39.88	59.75	X	X	
240	480.61	40.05	60.00	X	X	40
241	482.61	40.22	60.25	X	X	
242	484.61	40.38	60.50	X	X	
243	486.61	40.55	60.75	X	X	
244	488.61	40.72	61.00	X	X	
245	490.61	40.88	61.25	X	X	
246	492.61	41.05	61.50	X	X	41
247	494.61	41.22	61.75	X	X	
248	496.61	41.38	62.00	X	X	
249	498.61	41.55	62.25	X	X	
250	500.61	41.72	62.50	X	X	
251	502.61	41.88	62.75	X	X	
252	504.61	42.05	63.00	X	X	42
253	506.61	42.22	63.25	X	X	
254	508.61	42.38	63.50	X	X	
255	510.61	42.55	63.75	X	X	
256	512.61	42.72	64.00	X	X	
257	514.61	42.88	64.25	X	X	
258	516.61	43.05	64.50	X	X	43
259	518.61	43.22	64.75	X	X	
260	520.61	43.38	65.00	X	X	
261	522.61	43.55	65.25	X	X	
262	524.61	43.72	65.50	X	X	
263	526.61	43.88	65.75	X	X	
264	528.61	44.05	66.00	X	X	44
265	530.61	44.22	66.25	X	X	
266	532.61	44.38	66.50	X	X	
267	534.61	44.55	66.75	X	X	
268	536.61	44.72	67.00	X	X	
269	538.61	44.88	67.25	X	X	
270	540.61	45.05	67.50	X	X	45
271	542.61	45.22	67.75	X	X	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
272	544.61	45.38	68.00	X	X	
273	546.61	45.55	68.25	X	X	
274	548.61	45.72	68.50	X	X	
275	550.61	45.88	68.75	X	X	
276	552.61	46.05	69.00	X	X	46
277	554.61	46.22	69.25	X	X	
278	556.61	46.38	69.50	X	X	
279	558.61	46.55	69.75	X	X	
280	560.61	46.72	70.00	X	X	
281	562.61	46.88	70.25	X	X	
282	564.61	47.05	70.50	X	X	47
283	566.61	47.22	70.75	X	X	
284	568.61	47.38	71.00	X	X	
285	570.61	47.55	71.25	X	X	
286	572.61	47.72	71.50	X	X	
287	574.61	47.88	71.75	X	X	
288	576.61	48.05	72.00	X	X	48
289	578.61	48.22	72.25	X	X	
290	580.61	48.38	72.50	X	X	
291	582.61	48.55	72.75	X	X	
292	584.61	48.72	73.00	X	X	
293	586.61	48.88	73.25	X	X	
294	588.61	49.05	73.50	X	X	49
295	590.61	49.22	73.75	X	X	
296	592.61	49.38	74.00	X	X	
297	594.61	49.55	74.25	X	X	
298	596.61	49.72	74.50	X	X	
299	598.61	49.88	74.75	X	X	
300	600.61	50.05	75.00	X	X	50
301	602.61	50.22	75.25	X	X	
302	604.61	50.38	75.50	X	X	
303	606.61	50.55	75.75	X	X	
304	608.61	50.72	76.00	X	X	
305	610.61	50.88	76.25	X	X	
306	612.61	51.05	76.50	X	X	51
307	614.61	51.22	76.75	X	X	
308	616.61	51.38	77.00	X	X	
309	618.61	51.55	77.25	X	X	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
310	620.61	51.72	77.50	X	X	
311	622.61	51.88	77.75	X	X	
312	624.61	52.05	78.00	X	X	52
313	626.61	52.22	78.25	X	X	
314	628.61	52.38	78.50	X	X	
315	630.61	52.55	78.75	X	X	
316	632.61	52.72	79.00	X	X	
317	634.61	52.88	79.25	X	X	
318	636.61	53.05	79.50	X	X	53
319	638.61	53.22	79.75	X	X	
320	640.61	53.38	80.00	X	X	
321	642.61	53.55	80.25	X	X	
322	644.61	53.72	80.50	X	X	
323	646.61	53.88	80.75	X	X	
324	648.61	54.05	81.00	X	X	54
325	650.61	54.22	81.25	X	X	
326	652.61	54.38	81.50	X	X	
327	654.61	54.55	81.75	X	X	
328	656.61	54.72	82.00	X	X	
329	658.61	54.88	82.25	X	X	
330	660.61	55.05	82.50	X	X	55
331	662.61	55.22	82.75	X	X	
332	664.61	55.38	83.00	X	X	
333	666.61	55.55	83.25	X	X	
334	668.61	55.72	83.50	X	X	
335	670.61	55.88	83.75	X	X	
336	672.61	56.05	84.00	X	X	56
337	674.61	56.22	84.25	X	X	
338	676.61	56.38	84.50	X	X	
339	678.61	56.55	84.75	X	X	
340	680.61	56.72	85.00	X	X	
341	682.61	56.88	85.25	X	X	
342	684.61	57.05	85.50	X	X	57
343	686.61	57.22	85.75	X	X	
344	688.61	57.38	86.00	X	X	
345	690.61	57.55	86.25	X	X	
346	692.61	57.72	86.50	X	X	
347	694.61	57.88	86.75	X	X	
348	696.61	58.05	87.00	X	X	58

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Length Order Guide (Bottom/Side/End Cap - Bottom/Side/End Cap)

Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below
Total product length received will include added end-prep of choice within a tolerance (±in 0.275) - See example (B) below

Example (A)



Example (B)

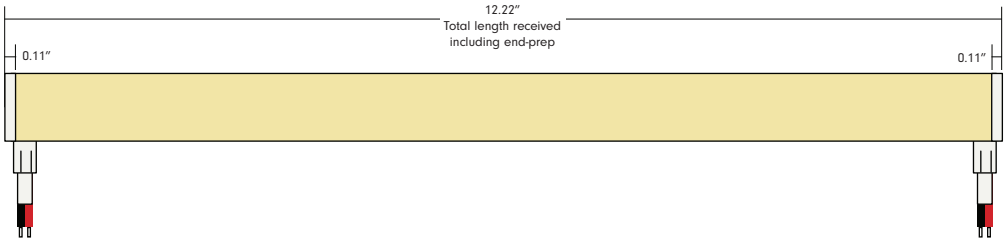

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
006	12.22	1.02	1.50	3.00	4.50	1
007	14.22	1.19	1.75	3.50	5.25	
008	16.22	1.35	2.00	4.00	6.00	
009	18.22	1.52	2.25	4.50	6.75	
010	20.22	1.69	2.50	5.00	7.50	
011	22.22	1.85	2.75	5.50	8.25	
012	24.22	2.02	3.00	6.00	9.00	2
013	26.22	2.19	3.25	6.50	9.75	
014	28.22	2.35	3.50	7.00	10.50	
015	30.22	2.52	3.75	7.50	11.25	
016	32.22	2.69	4.00	8.00	12.00	
017	34.22	2.85	4.25	8.50	12.75	
018	36.22	3.02	4.50	9.00	13.50	3
019	38.22	3.19	4.75	9.50	14.25	
020	40.22	3.35	5.00	10.00	15.00	
021	42.22	3.52	5.25	10.50	15.75	
022	44.22	3.69	5.50	11.00	16.50	
023	46.22	3.85	5.75	11.50	17.25	
024	48.22	4.02	6.00	12.00	18.00	4
025	50.22	4.19	6.25	12.50	18.75	
026	52.22	4.35	6.50	13.00	19.50	
027	54.22	4.52	6.75	13.50	20.25	
028	56.22	4.69	7.00	14.00	21.00	
029	58.22	4.85	7.25	14.50	21.75	
030	60.22	5.02	7.50	15.00	22.50	5
031	62.22	5.19	7.75	15.50	23.25	
032	64.22	5.35	8.00	16.00	24.00	
033	66.22	5.52	8.25	16.50	24.75	
034	68.22	5.69	8.50	17.00	25.50	
035	70.22	5.85	8.75	17.50	26.25	
036	72.22	6.02	9.00	18.00	27.00	6
037	74.22	6.19	9.25	18.50	27.75	
038	76.22	6.35	9.50	19.00	28.50	
039	78.22	6.52	9.75	19.50	29.25	
040	80.22	6.69	10.00	20.00	30.00	
041	82.22	6.85	10.25	20.50	30.75	
042	84.22	7.02	10.50	21.00	31.50	7
043	86.22	7.19	10.75	21.50	32.25	
044	88.22	7.35	11.00	22.00	33.00	
045	90.22	7.52	11.25	22.50	33.75	
046	92.22	7.69	11.50	23.00	34.50	
047	94.22	7.85	11.75	23.50	35.25	
048	96.22	8.02	12.00	24.00	36.00	8
049	98.22	8.19	12.25	24.50	36.75	
050	100.22	8.35	12.50	25.00	37.50	
051	102.22	8.52	12.75	25.50	38.25	
052	104.22	8.69	13.00	26.00	39.00	
053	106.22	8.85	13.25	26.50	39.75	
054	108.22	9.02	13.50	27.00	40.50	9
055	110.22	9.19	13.75	27.50	41.25	
056	112.22	9.35	14.00	28.00	42.00	
057	114.22	9.52	14.25	28.50	42.75	
058	116.22	9.69	14.50	29.00	43.50	
059	118.22	9.85	14.75	29.50	44.25	
060	120.22	10.02	15.00	30.00	45.00	10
061	122.22	10.19	15.25	30.50	45.75	
062	124.22	10.35	15.50	31.00	46.50	
063	126.22	10.52	15.75	31.50	47.25	
064	128.22	10.69	16.00	32.00	48.00	
065	130.22	10.85	16.25	32.50	48.75	
066	132.22	11.02	16.50	33.00	49.50	11
067	134.22	11.19	16.75	33.50	50.25	
068	136.22	11.35	17.00	34.00	51.00	
069	138.22	11.52	17.25	34.50	51.75	
070	140.22	11.69	17.50	35.00	52.50	
071	142.22	11.85	17.75	35.50	53.25	
072	144.22	12.02	18.00	36.00	54.00	12
073	146.22	12.19	18.25	36.50	54.75	
074	148.22	12.35	18.50	37.00	55.50	
075	150.22	12.52	18.75	37.50	56.25	
076	152.22	12.69	19.00	38.00	57.00	
077	154.22	12.85	19.25	38.50	57.75	
078	156.22	13.02	19.50	39.00	58.50	13
079	158.22	13.19	19.75	39.50	59.25	
080	160.22	13.35	20.00	40.00	60.00	
081	162.22	13.52	20.25	40.50	60.75	
082	164.22	13.69	20.50	41.00	61.50	
083	166.22	13.85	20.75	41.50	62.25	
084	168.22	14.02	21.00	42.00	63.00	14
085	170.22	14.19	21.25	42.50	63.75	
086	172.22	14.35	21.50	43.00	64.50	
087	174.22	14.52	21.75	43.50	65.25	
088	176.22	14.69	22.00	44.00	66.00	
089	178.22	14.85	22.25	44.50	66.75	
090	180.22	15.02	22.50	45.00	67.50	15
091	182.22	15.19	22.75	45.50	68.25	
092	184.22	15.35	23.00	46.00	69.00	
093	186.22	15.52	23.25	46.50	69.75	
094	188.22	15.69	23.50	47.00	70.50	
095	190.22	15.85	23.75	47.50	71.25	
096	192.22	16.02	24.00	48.00	72.00	16
097	194.22	16.19	24.25	48.50	72.75	
098	196.22	16.35	24.50	49.00	73.50	
099	198.22	16.52	24.75	49.50	74.25	
100	200.22	16.69	25.00	50.00	75.00	
101	202.22	16.85	25.25	50.50	75.75	
102	204.22	17.02	25.50	51.00	76.50	17
103	206.22	17.19	25.75	51.50	77.25	
104	208.22	17.35	26.00	52.00	78.00	
105	210.22	17.52	26.25	52.50	78.75	
106	212.22	17.69	26.50	53.00	79.50	
107	214.22	17.85	26.75	53.50	80.25	
108	216.22	18.02	27.00	54.00	81.00	18
109	218.22	18.19	27.25	54.50	81.75	
110	220.22	18.35	27.50	55.00	82.50	
111	222.22	18.52	27.75	55.50	83.25	
112	224.22	18.69	28.00	56.00	84.00	
113	226.22	18.85	28.25	56.50	84.75	
114	228.22	19.02	28.50	57.00	85.50	19
115	230.22	19.19	28.75	57.50	X	
116	232.22	19.35	29.00	58.00	X	
117	234.22	19.52	29.25	58.50	X	
118	236.22	19.69	29.50	59.00	X	
119	238.22	19.85	29.75	59.50	X	

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Length Order Guide (Bottom/Side/End Cap - Bottom/Side/End Cap)

Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below
Total product length received will include added end-prep of choice within a tolerance (±in 0.275) - See example (B) below

Example (A)



Example (B)

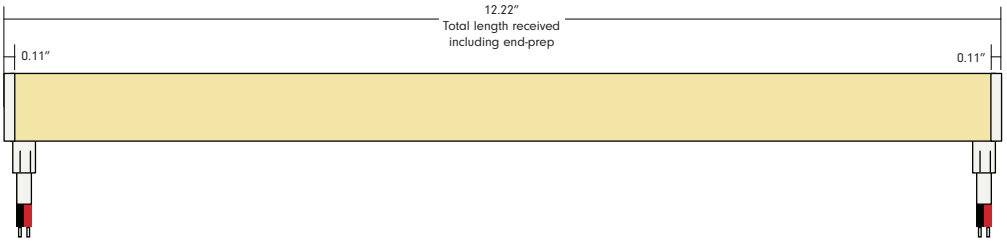

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
120	240.22	20.02	30.00	60.00	X	20
121	242.22	20.19	30.25	60.50	X	
122	244.22	20.35	30.50	61.00	X	
123	246.22	20.52	30.75	61.50	X	
124	248.22	20.69	31.00	62.00	X	
125	250.22	20.85	31.25	62.50	X	
126	252.22	21.02	31.50	63.00	X	21
127	254.22	21.19	31.75	63.50	X	
128	256.22	21.35	32.00	64.00	X	
129	258.22	21.52	32.25	64.50	X	
130	260.22	21.69	32.50	65.00	X	
131	262.22	21.85	32.75	65.50	X	
132	264.22	22.02	33.00	66.00	X	22
133	266.22	22.19	33.25	66.50	X	
134	268.22	22.35	33.50	67.00	X	
135	270.22	22.52	33.75	67.50	X	
136	272.22	22.69	34.00	68.00	X	
137	274.22	22.85	34.25	68.50	X	
138	276.22	23.02	34.50	69.00	X	23
139	278.22	23.19	34.75	69.50	X	
140	280.22	23.35	35.00	70.00	X	
141	282.22	23.52	35.25	70.50	X	
142	284.22	23.69	35.50	71.00	X	
143	286.22	23.85	35.75	71.50	X	
144	288.22	24.02	36.00	72.00	X	24
145	290.22	24.19	36.25	72.50	X	
146	292.22	24.35	36.50	73.00	X	
147	294.22	24.52	36.75	73.50	X	
148	296.22	24.69	37.00	74.00	X	
149	298.22	24.85	37.25	74.50	X	
150	300.22	25.02	37.50	75.00	X	25
151	302.22	25.19	37.75	75.50	X	
152	304.22	25.35	38.00	76.00	X	
153	306.22	25.52	38.25	76.50	X	
154	308.22	25.69	38.50	77.00	X	
155	310.22	25.85	38.75	77.50	X	
156	312.22	26.02	39.00	78.00	X	26
157	314.22	26.19	39.25	78.50	X	
158	316.22	26.35	39.50	79.00	X	
159	318.22	26.52	39.75	79.50	X	
160	320.22	26.69	40.00	80.00	X	
161	322.22	26.85	40.25	80.50	X	
162	324.22	27.02	40.50	81.00	X	27
163	326.22	27.19	40.75	81.50	X	
164	328.22	27.35	41.00	82.00	X	
165	330.22	27.52	41.25	82.50	X	
166	332.22	27.69	41.50	83.00	X	
167	334.22	27.85	41.75	83.50	X	
168	336.22	28.02	42.00	84.00	X	28
169	338.22	28.19	42.25	84.50	X	
170	340.22	28.35	42.50	85.00	X	
171	342.22	28.52	42.75	85.50	X	
172	344.22	28.69	43.00	86.00	X	
173	346.22	28.85	43.25	86.50	X	
174	348.22	29.02	43.50	87.00	X	29
175	350.22	29.19	43.75	X	X	
176	352.22	29.35	44.00	X	X	
177	354.22	29.52	44.25	X	X	
178	356.22	29.69	44.50	X	X	
179	358.22	29.85	44.75	X	X	
180	360.22	30.02	45.00	X	X	30
181	362.22	30.19	45.25	X	X	
182	364.22	30.35	45.50	X	X	
183	366.22	30.52	45.75	X	X	
184	368.22	30.69	46.00	X	X	
185	370.22	30.85	46.25	X	X	
186	372.22	31.02	46.50	X	X	31
187	374.22	31.19	46.75	X	X	
188	376.22	31.35	47.00	X	X	
189	378.22	31.52	47.25	X	X	
190	380.22	31.69	47.50	X	X	
191	382.22	31.85	47.75	X	X	
192	384.22	32.02	48.00	X	X	32
193	386.22	32.19	48.25	X	X	
194	388.22	32.35	48.50	X	X	
195	390.22	32.52	48.75	X	X	
196	392.22	32.69	49.00	X	X	
197	394.22	32.85	49.25	X	X	
198	396.22	33.02	49.50	X	X	33
199	398.22	33.19	49.75	X	X	
200	400.22	33.35	50.00	X	X	
201	402.22	33.52	50.25	X	X	
202	404.22	33.69	50.50	X	X	
203	406.22	33.85	50.75	X	X	
204	408.22	34.02	51.00	X	X	34
205	410.22	34.19	51.25	X	X	
206	412.22	34.35	51.50	X	X	
207	414.22	34.52	51.75	X	X	
208	416.22	34.69	52.00	X	X	
209	418.22	34.85	52.25	X	X	
210	420.22	35.02	52.50	X	X	35
211	422.22	35.19	52.75	X	X	
212	424.22	35.35	53.00	X	X	
213	426.22	35.52	53.25	X	X	
214	428.22	35.69	53.50	X	X	
215	430.22	35.85	53.75	X	X	
216	432.22	36.02	54.00	X	X	36
217	434.22	36.19	54.25	X	X	
218	436.22	36.35	54.50	X	X	
219	438.22	36.52	54.75	X	X	
220	440.22	36.69	55.00	X	X	
221	442.22	36.85	55.25	X	X	
222	444.22	37.02	55.50	X	X	37
223	446.22	37.19	55.75	X	X	
224	448.22	37.35	56.00	X	X	
225	450.22	37.52	56.25	X	X	
226	452.22	37.69	56.50	X	X	
227	454.22	37.85	56.75	X	X	
228	456.22	38.02	57.00	X	X	38
229	458.22	38.19	57.25	X	X	
230	460.22	38.35	57.50	X	X	
231	462.22	38.52	57.75	X	X	
232	464.22	38.69	58.00	X	X	
233	466.22	38.85	58.25	X	X	

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Length Order Guide (Bottom/Side/End Cap - Bottom/Side/End Cap)

Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below
Total product length received will include added end-prep of choice within a tolerance (±in 0.275) - See example (B) below

Example (A)



Example (B)

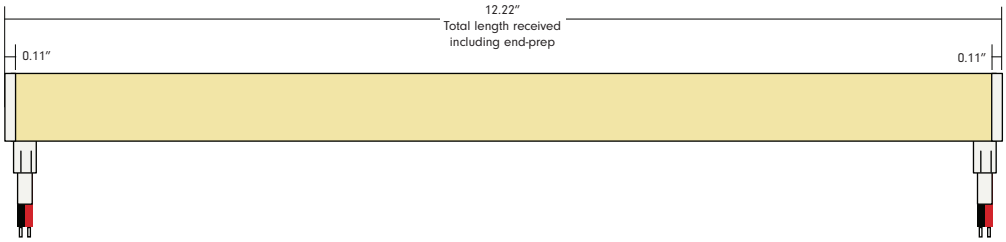

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
234	468.22	39.02	58.50	X	X	39
235	470.22	39.19	58.75	X	X	
236	472.22	39.35	59.00	X	X	
237	474.22	39.52	59.25	X	X	
238	476.22	39.69	59.50	X	X	
239	478.22	39.85	59.75	X	X	
240	480.22	40.02	60.00	X	X	40
241	482.22	40.19	60.25	X	X	
242	484.22	40.35	60.50	X	X	
243	486.22	40.52	60.75	X	X	
244	488.22	40.69	61.00	X	X	
245	490.22	40.85	61.25	X	X	
246	492.22	41.02	61.50	X	X	41
247	494.22	41.19	61.75	X	X	
248	496.22	41.35	62.00	X	X	
249	498.22	41.52	62.25	X	X	
250	500.22	41.69	62.50	X	X	
251	502.22	41.85	62.75	X	X	
252	504.22	42.02	63.00	X	X	42
253	506.22	42.19	63.25	X	X	
254	508.22	42.35	63.50	X	X	
255	510.22	42.52	63.75	X	X	
256	512.22	42.69	64.00	X	X	
257	514.22	42.85	64.25	X	X	
258	516.22	43.02	64.50	X	X	43
259	518.22	43.19	64.75	X	X	
260	520.22	43.35	65.00	X	X	
261	522.22	43.52	65.25	X	X	
262	524.22	43.69	65.50	X	X	
263	526.22	43.85	65.75	X	X	
264	528.22	44.02	66.00	X	X	44
265	530.22	44.19	66.25	X	X	
266	532.22	44.35	66.50	X	X	
267	534.22	44.52	66.75	X	X	
268	536.22	44.69	67.00	X	X	
269	538.22	44.85	67.25	X	X	
270	540.22	45.02	67.50	X	X	45
271	542.22	45.19		X	X	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
272	544.22	45.35	68.00	X	X	
273	546.22	45.52	68.25	X	X	
274	548.22	45.69	68.50	X	X	
275	550.22	45.85	68.75	X	X	
276	552.22	46.02	69.00	X	X	46
277	554.22	46.19	69.25	X	X	
278	556.22	46.35	69.50	X	X	
279	558.22	46.52	69.75	X	X	
280	560.22	46.69	70.00	X	X	
281	562.22	46.85	70.25	X	X	
282	564.22	47.02	70.50	X	X	47
283	566.22	47.19	70.75	X	X	
284	568.22	47.35	71.00	X	X	
285	570.22	47.52	71.25	X	X	
286	572.22	47.69	71.50	X	X	
287	574.22	47.85	71.75	X	X	
288	576.22	48.02	72.00	X	X	48
289	578.22	48.19	72.25	X	X	
290	580.22	48.35	72.50	X	X	
291	582.22	48.52	72.75	X	X	
292	584.22	48.69	73.00	X	X	
293	586.22	48.85	73.25	X	X	
294	588.22	49.02	73.50	X	X	49
295	590.22	49.19	73.75	X	X	
296	592.22	49.35	74.00	X	X	
297	594.22	49.52	74.25	X	X	
298	596.22	49.69	74.50	X	X	
299	598.22	49.85	74.75	X	X	
300	600.22	50.02	75.00	X	X	50
301	602.22	50.19	75.25	X	X	
302	604.22	50.35	75.50	X	X	
303	606.22	50.52	75.75	X	X	
304	608.22	50.69	76.00	X	X	
305	610.22	50.85	76.25	X	X	
306	612.22	51.02	76.50	X	X	51
307	614.22	51.19	76.75	X	X	
308	616.22	51.35	77.00	X	X	
309	618.22	51.52	77.25	X	X	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	NOMINAL LENGTH
310	620.22	51.69	77.50	X	X	
311	622.22	51.85	77.75	X	X	
312	624.22	52.02	78.00	X	X	52
313	626.22	52.19	78.25	X	X	
314	628.22	52.35	78.50	X	X	
315	630.22	52.52	78.75	X	X	
316	632.22	52.69	79.00	X	X	
317	634.22	52.85	79.25	X	X	
318	636.22	53.02	79.50	X	X	53
319	638.22	53.19	79.75	X	X	
320	640.22	53.35	80.00	X	X	
321	642.22	53.52	80.25	X	X	
322	644.22	53.69	80.50	X	X	
323	646.22	53.85	80.75	X	X	
324	648.22	54.02	81.00	X	X	54
325	650.22	54.19	81.25	X	X	
326	652.22	54.35	81.50	X	X	
327	654.22	54.52	81.75	X	X	
328	656.22	54.69	82.00	X	X	
329	658.22	54.85	82.25	X	X	
330	660.22	55.02	82.50	X	X	55
331	662.22	55.19	82.75	X	X	
332	664.22	55.35	83.00	X	X	
333	666.22	55.52	83.25	X	X	
334	668.22	55.69	83.50	X	X	
335	670.22	55.85	83.75	X	X	
336	672.22	56.02	84.00	X	X	56
337	674.22	56.19	84.25	X	X	
338	676.22	56.35	84.50	X	X	
339	678.22	56.52	84.75	X	X	
340	680.22	56.69	85.00	X	X	
341	682.22	56.85	85.25	X	X	
342	684.22	57.02	85.50	X	X	57
343	686.22	57.19	85.75	X	X	
344	688.22	57.35	86.00	X	X	
345	690.22	57.52	86.25	X	X	
346	692.22	57.69	86.50	X	X	
347	694.22	57.85	86.75	X	X	
348	696.22	58.02	87.00	X	X	58

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Accessories Mounting



TRCEPR-SLV-CHAN-4
Aluminum Channel
with internal grip
4' Length



TRCEPR-SLV-SF-CHAN-4
Aluminum Single Flange
Mud-In Horizontal-Bend Channel
4' Length



TRCEPR-SLV-DF-CHAN-4
Aluminum Double Flange
Mud-In Dual-Bend Channel
4' Length



TRCEPR-SLV-NCHAN-4
Aluminum Notched
Dual-Bend Channel
4' Length



TRCEPR-XXX-MTCLIPS
XXX= **SLV** (silver), **BLK** (black)
3 Mounting clips with 3 screws



TRCEPR-CLR-PCCHAN-01-4
Polycarbonate Channel
4' Length



TRCEPR-CLR-PCCHAN-02-4
Polycarbonate Channel
4' Length



TRCEPR-CLR-PCCLIPS
Polycarbonate Clip
3 Mounting clips with 3 screws

TRCEPR-NS-EC
Trace Pro Assembled
Closed Clear Mechanical End
Cap (Screwless)

FLXD-SIL-GE-10
GE Silicone 10oz Tube
Use to adhere TRACE into
entire run length of channel
25' estimated bead length per
10oz tube

Accessories Power & Data

TRCEPR-JUMPER-5P-XX
XX = **5** (5'), **10** (10'), **25** (25')
M12 (5-Pin) Jumper Cable

GELJB-3-01-BK
1/2/3 Wire IP67 Small Gel Filled
Junction Box

GELJB-3-02-BK
1/2/3 Wire IP67 Medium Gel
Filled Junction Box

Tivoli, LLC. reserves the right to modify this specification without prior notice.

In-Wall DMX Controls

TVOQ-10-XX-7
XX = **BK** (black), **WH** (white)
1024 DMX channel, 500 scene,
10 zone, glass touch screen

TVOQ-2-XX
XX = **BK** (black), **WH** (white)
512 DMX channel, 99 scene,
1 zone, glass touch screen

TVOQ-1-WHT
512 DMX channel, 16 scene,
4 zone, glass touch screen

Power Supplies - Indoor

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-D	Indoor / Damp	100-277V AC 50/60 HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-D				2	2x96W	2x4A
	ADUL-320-3-4-24-D				3	3x96W	3x4A

ADUL - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-DOT	Indoor / Damp	100-277V AC 50/60 HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-DOT				2	2x96W	2x4A
	ADUL-320-3-4-24-DOT				3	3x96W	3x4A

ADUL - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-DIN	Indoor / Damp	100-277V AC 50/60 HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-DIN				2	2x96W	2x4A
	ADUL-320-3-4-24-DIN				3	3x96W	3x4A

ADUL - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-240-2-4-24-DIN-2	Indoor / Damp	100-277V AC 5o/60 Hz	24V DC	2	2x96W	2x4A
	ADUL-320-3-4-24-DIN-3				3	3x96W	3x4A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Power Supplies - Indoor/Outdoor

INFINITY DIRECT- MLV / ELV / 0-10V / PWM / TRIAC

Note: For TRACE product select internal switch to Voltage Regulated option

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Direct Series Class 2 Transformer	INF-DR-J-96-1-4-24	Indoor / Outdoor	100 - 277V AC	24V DC	1	96W	9W	4A
	INF-DR-J-192-2-4-24				2	2x96W	2x9W	2x4A
	INF-DR-J-288-3-4-24				3	3x96W	3X9W	3x4A

ADNM - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-90-1-4-24-D	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	90W	3.75A
	ADNM-120-1-4-24-D				1	96W	4A
	ADNM-240-2-4-24-D				2	2x96W	2x4A
	ADNM-320-3-4-24-D				3	3x96W	3x4A

ADNM - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-90-1-4-24-DOT	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	90W	3.75A
	ADNM-120-1-4-24-DOT				1	96W	4A
	ADNM-240-2-4-24-DOT				2	2x96W	2x4A
	ADNM-320-3-4-24-DOT				3	3x96W	3x4A

ADNM - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-90-1-4-24-DIN	Indoor / Outdoor	100-277V AC 5o/60 Hz	24V DC	1	90W	3.75A
	ADNM-120-1-4-24-DIN				1	96W	4A
	ADNM-240-2-4-24-DIN				2	2x96W	2x4A
	ADNM-320-3-4-24-DIN				3	3x96W	3x4A

ADNM - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-240-2-4-24-DIN-2	Indoor / Outdoor	100-277V AC 5o/60 Hz	24V DC	2	2x96W	2x4A
	ADNM-320-3-4-24-DIN-3				3	3x96W	3x4A

ADNM - DMX/DALI FLICKER-FREE FOR TV STUDIO

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-120-1-4-24-DTV	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	1x96W	1x4A
	ADNM-240-2-4-24-DTV				2	2x96W	2x4A
	ADNM-320-3-4-24-DTV				3	3x96W	3x4A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)

DIMMING - MLV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

DIMMING - ELV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W

Dimmer + Driver

STANDARD STATIC DRIVER + DIMMER 2 IN 1

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
Standard Driver + Dimmer Static 2 in 1 Class 2	TDD-1-XXX-24	Indoor	120V AC 60Hz	24V DC	1	96W	4A

WIRELESS STATIC DRIVER + DIMMER 2 IN 1

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
Wireless Driver + Dimmer Static 2 in 1 Class 2	TDD-1-XXX-24-KIT	Indoor	120V AC 60Hz	24V DC	1	96W	4A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Warnings - Handling and Care

TRACE™ Pixel RGB+W VERTICAL MAY BE EASILY DAMAGED! The reliability of the product can only be ensured if these warnings and cautions are complied with faithfully. Keep these instructions for future maintenance work.

WARNING! Risk of product damage. Longer runs of Trace™ Pixel RGB+W Vertical lighting strands must be installed by at least two people.

IMPORTANT! The Trace™ Pixel RGB+W Vertical luminaire must not be allowed to bend or hang down. That way, the bending limit will not be inadvertently exceeded, resulting in product damage.

Warning! Risk of product damage. Trace™ Pixel RGB+W Vertical must not be bent at less than 9.45" diameter or damage will result. Do not allow Trace™ Pixel RGB+W Vertical to twist or bend in the wrong direction.

WARNING! Risk of product damage. Insert Trace™ Pixel RGB+W Vertical into channel evenly and gradually to keep twisting and bending to a minimum.



Keep Trace™ Pixel Vertical from twisting or bending in the wrong direction. Two person installation.

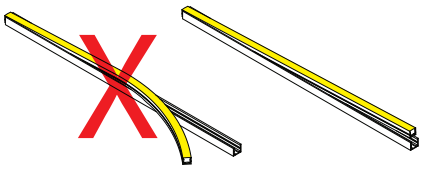

TRACE™ Pixel VERTICAL
Do not allow to twist or bend in the wrong direction.

Tivoli, LLC. reserves the right to modify this specification without prior notice.