
# MARSALA

Pre-Built Fixture - ELITE+ PRO



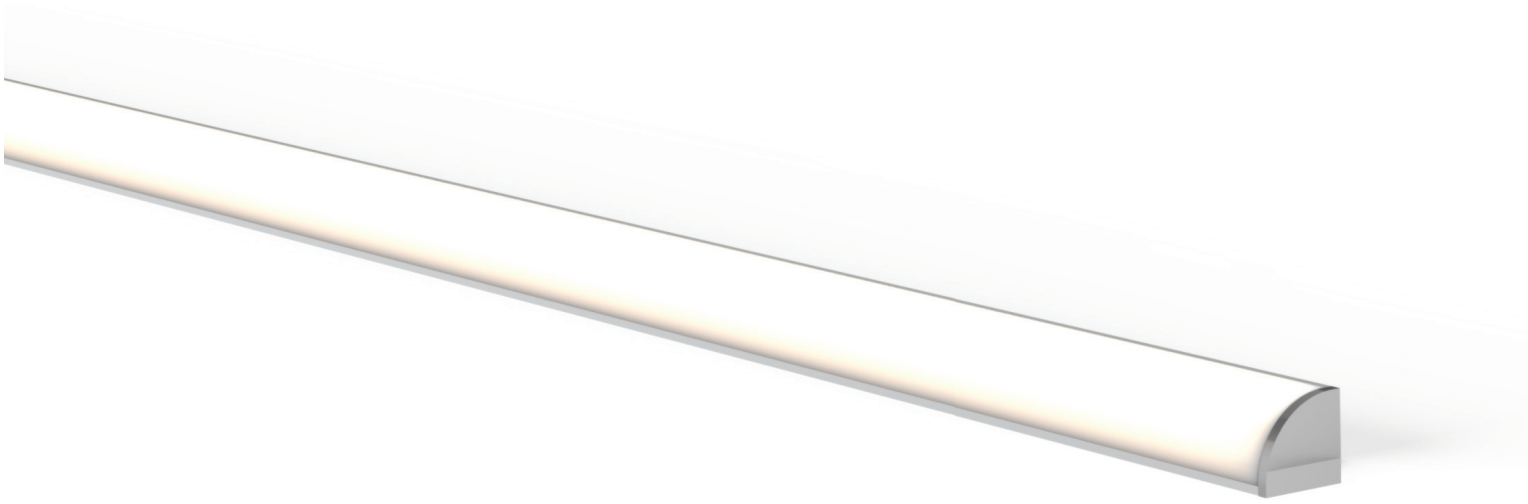


Project: _____ Type: _____


- Available in selected CCT options for consistent focus on high efficacy.
- Delivered ready to install with integrated light engine, housing, and factory-installed power leads.
- Available in fixture lengths from 1 ft to 6.5 ft to accommodate a wide range of architectural applications.
- Optimized optical design provides smooth, uniform color blending with no visible color separation.
- Streamlined ordering and manufacturing processes ensure consistency across all fixture lengths.
- MLV, ELV, 0-10V and DMX supported control systems
- Low Voltage 24V DC
- IP54 Rating
- 5 Year Warranty

## Dimensions

With Metal Clip




With Adjustable Bracket

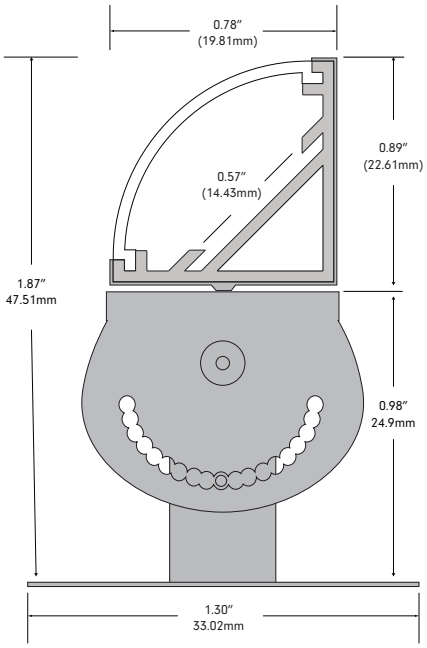


Tivoli, LLC. reserves the right to modify this specification without prior notice.

## Specification

| PRODUCT CODE | INTENSITY | LOCATION | CCT | FINISH | LENS | FIRST POWER LEAD | FIRST POSITION TYPE | SECOND POWER LEAD | SECOND POSITION TYPE | MOUNTING | LENGTH |
|---|---|---|---|---|---|---|---|---|---|---|---|
| MRSL | - | - | | | | | | | | | |
| **MRSL** = Marsala | **PRS** = Elite+ PRO SB<br>**PRH** = Elite+ PRO HO<br>**PRV** = Elite+ PRO VHO | **I** = Indoor | **18** = 1800K<br>**22** = 2200K<br>**24** = 2400K<br>**27** = 2700K<br>**30** = 3000K<br>**35** = 3500K<br>**40** = 4000K<br>**50** = 5000K | **SL** = Silver<br>**BK** = Black<br>**WH** = White | **OP** = Opal<br>**CL** = Clear<br>**DF** = Deffused | **B2B24** = 24" 2 Bare Wire Power Lead, Black<br>**B2W24** = 24" 2 Bare Wire Power Lead, White<br>**P2W24** = 24" 2 Plenum Rated Bare Wire Power Lead, White<br>**CB06** = 6" DC FEMALE Barrel Power Lead, Black, Indoor<br>**CW06** = 6" DC FEMALE Barrel Power Lead, White, Indoor | **F** = Front<br>**L** = Left<br>**R** = Right<br>**N** = Non Apply | **B2B24** = 24" 2 Bare Wire Power Lead, Black<br>**B2W24** = 24" 2 Bare Wire Power Lead, White<br>**P2W24** = 24" 2 Plenum Rated Bare Wire Power Lead, White<br>**CB06** = 6" DC MALE Barrel Power Lead, Black, Indoor<br>**CW06** = 6" DC MALE Barrel Power Lead, White, Indoor<br>**DED** = Dead End | **F** = Front<br>**L** = Left<br>**R** = Right<br>**N** = Non Apply | **C** = Clip<br>**J** = Adjustable | **See Chart** |

## Specification - Clear Lens

**SB** Standard Brightness

| Kelvin Temperature | 1800K | 2200K | 2400K | 2700K | 3000K | 3500K | 4000K | 5000K |
|---|---|---|---|---|---|---|---|---|
| Lumens/ft | 334.8 | 405.48 | 412.92 | 432.45 | 454.77 | 456.63 | 498.48 | 499.41 |
| Efficacy (Lm/W) | 111.6 | 135.16 | 137.64 | 144.15 | 151.59 | 152.21 | 166.16 | 166.47 |
| CRI | 91 | 93 | 92 | 93 | 93 | 94 | 93 | 94 |
| R9 | 53.2 | 64.2 | 64.2 | 64.2 | 68.1 | 72.6 | 65.5 | 65.5 |
| Measured Power W/ft | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.6 |
| Listed Power W/ft. | 3 | | | | | | | |
| Max Run | 30' | | | | | | | |

**HO** High Output

| Kelvin Temperature | 1800K | 2200K | 2400K | 2700K | 3000K | 3500K | 4000K | 5000K |
|---|---|---|---|---|---|---|---|---|
| Lumens/ft | 478.95 | 573.81 | 590.55 | 610.08 | 631.47 | 639.84 | 708.66 | 724.47 |
| Efficacy (Lm/W) | 106.43 | 127.51 | 131.23 | 135.57 | 140.33 | 142.19 | 157.48 | 160.99 |
| CRI | 93 | 93 | 93 | 93 | 93 | 93 | 93 | 93 |
| R9 | 64.5 | 64.5 | 64.5 | 64.5 | 64.5 | 64.5 | 64.5 | 64.5 |
| Measured Power W/ft | 3.6 | 3.6 | 3.6 | 3.6 | 3.6 | 3.6 | 3.7 | 3.7 |
| Listed Power W/ft. | 4.5 | | | | | | | |
| Max Run | 20' | | | | | | | |

**VHO** Very High Output

| Kelvin Temperature | 1800K | 2200K | 2400K | 2700K | 3000K | 3500K | 4000K | 5000K |
|---|---|---|---|---|---|---|---|---|
| Lumens/ft | 657.51 | 788.64 | 810.96 | 837.93 | 875.13 | 878.85 | 947.67 | 988.59 |
| Efficacy (Lm/W) | 109.59 | 131.44 | 135.16 | 139.66 | 145.86 | 146.48 | 157.95 | 164.77 |
| CRI | 93 | 93 | 93 | 93 | 93 | 93 | 93 | 93 |
| R9 | 63.2 | 63.2 | 63.2 | 63.2 | 63.2 | 63.2 | 63.2 | 63.2 |
| Measured Power W/ft | 5 | 5 | 5 | 5 | 5 | 5 | 5.1 | 5.1 |
| Listed Power W/ft. | 6 | | | | | | | |
| Max Run | 15' | | | | | | | |

## Specification - Diffused Lens

**SB** Standard Brightness

| Kelvin Temperature | 1800K | 2200K | 2400K | 2700K | 3000K | 3500K | 4000K | 5000K |
|---|---|---|---|---|---|---|---|---|
| Lumens/ft | 277.2 | 335.72 | 341.88 | 358.05 | 376.53 | 378.07 | 412.72 | 413.49 |
| Efficacy (Lm/W) | 92.40 | 111.91 | 113.96 | 119.35 | 125.51 | 126.02 | 137.57 | 137.83 |
| CRI | 91 | 93 | 92 | 93 | 93 | 94 | 93 | 94 |
| R9 | 53.2 | 64.2 | 64.2 | 64.2 | 68.1 | 72.6 | 65.5 | 65.5 |
| Measured Power W/ft | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.6 |
| Listed Power W/ft. | 3 | | | | | | | |
| Max Run | 30' | | | | | | | |

**HO** High Output

| Kelvin Temperature | 1800K | 2200K | 2400K | 2700K | 3000K | 3500K | 4000K | 5000K |
|---|---|---|---|---|---|---|---|---|
| Lumens/ft | 396.55 | 475.09 | 488.95 | 505.12 | 522.83 | 529.76 | 586.74 | 599.83 |
| Efficacy (Lm/W) | 88.12 | 105.58 | 108.66 | 112.25 | 116.18 | 117.72 | 130.39 | 133.30 |
| CRI | 93 | 93 | 93 | 93 | 93 | 93 | 93 | 93 |
| R9 | 64.5 | 64.5 | 64.5 | 64.5 | 64.5 | 64.5 | 64.5 | 64.5 |
| Measured Power W/ft | 3.6 | 3.6 | 3.6 | 3.6 | 3.6 | 3.6 | 3.7 | 3.7 |
| Listed Power W/ft. | 4.5 | | | | | | | |
| Max Run | 20' | | | | | | | |

**VHO** Very High Output

| Kelvin Temperature | 1800K | 2200K | 2400K | 2700K | 3000K | 3500K | 4000K | 5000K |
|---|---|---|---|---|---|---|---|---|
| Lumens/ft | 544.39 | 652.96 | 671.44 | 693.77 | 724.57 | 727.65 | 784.63 | 818.51 |
| Efficacy (Lm/W) | 90.73 | 108.83 | 111.91 | 115.63 | 120.76 | 121.28 | 130.77 | 136.42 |
| CRI | 93 | 93 | 93 | 93 | 93 | 93 | 93 | 93 |
| R9 | 63.2 | 63.2 | 63.2 | 63.2 | 63.2 | 63.2 | 63.2 | 63.2 |
| Measured Power W/ft | 5 | 5 | 5 | 5 | 5 | 5 | 5.1 | 5.1 |
| Listed Power W/ft. | 6 | | | | | | | |
| Max Run | 15' | | | | | | | |

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 10/19/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

## Specification - Opal Lens

| **SB** Standard Brightness | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Kelvin Temperature | 1800K | 2200K | 2400K | 2700K | 3000K | 3500K | 4000K | 5000K |
| Lumens/ft | 230.4 | 279.04 | 284.16 | 297.6 | 312.96 | 314.24 | 343.04 | 343.68 |
| Efficacy (Lm/W) | 76.80 | 93.01 | 94.72 | 99.20 | 104.32 | 104.75 | 114.35 | 114.56 |
| CRI | 91 | 93 | 92 | 93 | 93 | 94 | 93 | 94 |
| R9 | 53.2 | 64.2 | 64.2 | 64.2 | 68.1 | 72.6 | 65.5 | 65.5 |
| Measured Power W/ft | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.6 |
| Listed Power W/ft. | 3 | | | | | | | |
| Max Run | 30' | | | | | | | |

| **HO** High Output | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Kelvin Temperature | 1800K | 2200K | 2400K | 2700K | 3000K | 3500K | 4000K | 5000K |
| Lumens/ft | 329.6 | 394.88 | 406.4 | 419.84 | 434.56 | 440.32 | 487.68 | 498.56 |
| Efficacy (Lm/W) | 73.24 | 87.75 | 90.31 | 93.30 | 96.57 | 97.85 | 108.37 | 110.79 |
| CRI | 93 | 93 | 93 | 93 | 93 | 93 | 93 | 93 |
| R9 | 64.5 | 64.5 | 64.5 | 64.5 | 64.5 | 64.5 | 64.5 | 64.5 |
| Measured Power W/ft | 3.6 | 3.6 | 3.6 | 3.6 | 3.6 | 3.6 | 3.7 | 3.7 |
| Listed Power W/ft. | 4.5 | | | | | | | |
| Max Run | 20' | | | | | | | |

| **VHO** Very High Output | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Kelvin Temperature | 1800K | 2200K | 2400K | 2700K | 3000K | 3500K | 4000K | 5000K |
| Lumens/ft | 452.48 | 542.72 | 558.08 | 576.64 | 602.24 | 604.8 | 652.16 | 680.32 |
| Efficacy (Lm/W) | 75.41 | 90.45 | 93.01 | 96.11 | 100.37 | 100.80 | 108.69 | 113.39 |
| CRI | 93 | 93 | 93 | 93 | 93 | 93 | 93 | 93 |
| R9 | 63.2 | 63.2 | 63.2 | 63.2 | 63.2 | 63.2 | 63.2 | 63.2 |
| Measured Power W/ft | 5 | 5 | 5 | 5 | 5 | 5 | 5.1 | 5.1 |
| Listed Power W/ft. | 6 | | | | | | | |
| Max Run | 15' | | | | | | | |

## Overall Specification

| Electrical | |
|---|---|
| Input Voltage | 24V |
| Dimming | MLV/ELV/0-10V/DMX |
| **Physical** | |
| Operating Temperature | -40°F (-40°C) ~ +140°F (+60°C) |

| Certification and Testing | |
|---|---|
| Certification | UL Listed, CE |
| Lumen Maintenance (L70) | 60,000 hrs |
| Environment | IP54 Damp Location, Conformal eXo Shield |
| Warranty | 5 years |


Tivoli, LLC. reserves the right to modify this specification without prior notice.

## Length Order Guide (Front - Front)


Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below.
Total product length received will include added end-prep of choice within a tolerance (± 0.25") - See example (B) below

Example (A)

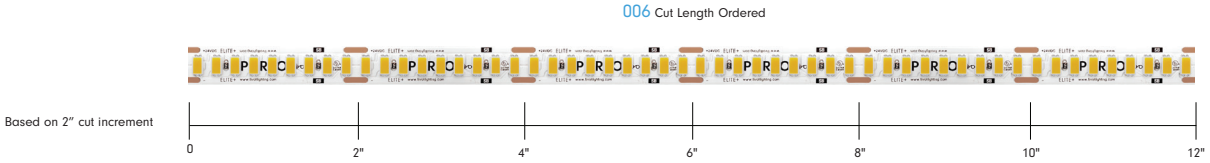


Example (B)

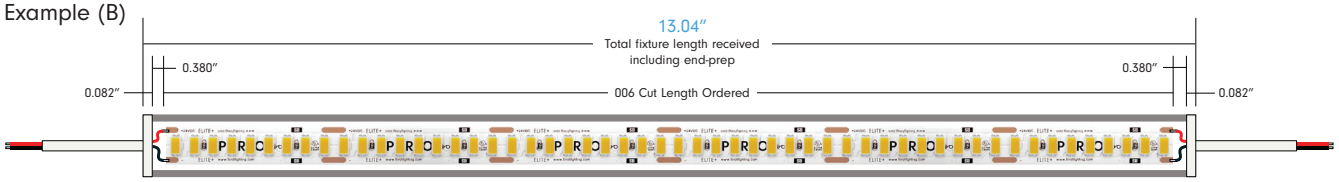


| CUT INCREMENT | ACTUAL INCH | ACTUAL FOOT | WATTS 3.0W | WATTS 4.5W | WATTS 6.0W | NOMINAL LENGTH |
|---|---|---|---|---|---|---|
| 006 | 13.04 | 1.09 | 3.03 | 4.55 | 6.06 | 1' |
| 007 | 15.06 | 1.26 | 3.54 | 5.30 | 7.07 | |
| 008 | 17.08 | 1.42 | 4.04 | 6.06 | 8.08 | |
| 009 | 19.10 | 1.59 | 4.55 | 6.82 | 9.09 | |
| 010 | 21.12 | 1.76 | 5.05 | 7.58 | 10.10 | |
| 011 | 23.14 | 1.93 | 5.56 | 8.33 | 11.11 | |
| 012 | 25.16 | 2.10 | 6.06 | 9.09 | 12.12 | 2' |
| 013 | 27.18 | 2.27 | 6.57 | 9.85 | 13.13 | |
| 014 | 29.20 | 2.43 | 7.07 | 10.61 | 14.14 | |
| 015 | 31.22 | 2.60 | 7.58 | 11.36 | 15.15 | |
| 016 | 33.24 | 2.77 | 8.08 | 12.12 | 16.16 | |
| 017 | 35.26 | 2.94 | 8.59 | 12.88 | 17.17 | |
| 018 | 37.28 | 3.11 | 9.09 | 13.64 | 18.18 | 3' |
| 019 | 39.30 | 3.28 | 9.60 | 14.39 | 19.19 | |
| 020 | 41.32 | 3.44 | 10.10 | 15.15 | 20.20 | |
| 021 | 43.34 | 3.61 | 10.61 | 15.91 | 21.21 | |
| 022 | 45.36 | 3.78 | 11.11 | 16.67 | 22.22 | |
| 023 | 47.38 | 3.95 | 11.62 | 17.42 | 23.23 | |
| 024 | 49.40 | 4.12 | 12.12 | 18.18 | 24.24 | 4' |
| 025 | 51.42 | 4.29 | 12.63 | 18.94 | 25.25 | |
| 026 | 53.44 | 4.45 | 13.13 | 19.70 | 26.26 | |
| 027 | 55.46 | 4.62 | 13.64 | 20.45 | 27.27 | |
| 028 | 57.48 | 4.79 | 14.14 | 21.21 | 28.28 | |
| 029 | 59.50 | 4.96 | 14.65 | 21.97 | 29.29 | |
| 030 | 61.52 | 5.13 | 15.15 | 22.73 | 30.30 | 5' |
| 031 | 63.54 | 5.30 | 15.66 | 23.48 | 31.31 | |
| 032 | 65.56 | 5.46 | 16.16 | 24.24 | 32.32 | |
| 033 | 67.58 | 5.63 | 16.67 | 25.00 | 33.33 | |
| 034 | 69.60 | 5.80 | 17.17 | 25.76 | 34.34 | |
| 035 | 71.62 | 5.97 | 17.68 | 26.51 | 35.35 | |
| 036 | 73.64 | 6.14 | 18.18 | 27.27 | 36.36 | 6' |
| 037 | 75.66 | 6.31 | 18.69 | 28.03 | 37.37 | |
| 038 | 77.68 | 6.47 | 19.19 | 28.79 | 38.38 | 6.5' |


Tivoli, LLC. reserves the right to modify this specification without prior notice.

## Length Order Guide (Front - Left, Right **or** Left, Right - Front)


Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below.
Total product length received will include added end-prep of choice within a tolerance (± 0.25") - See example (B) below

Example (A)

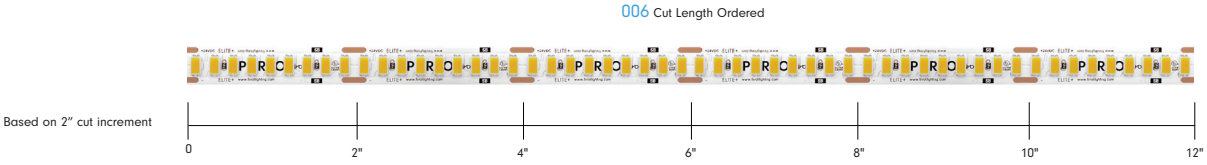


Example (B)

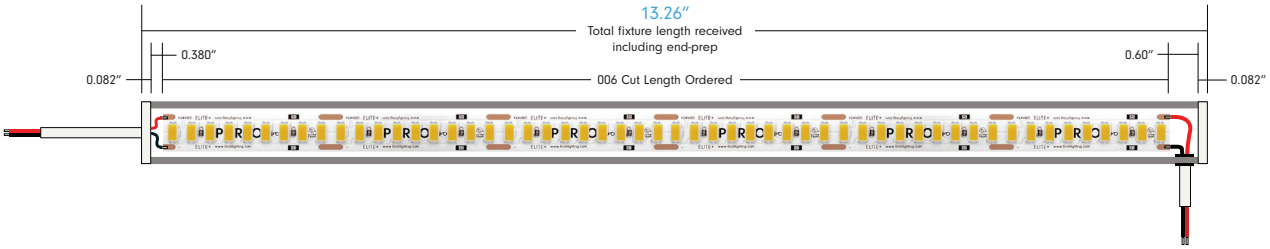


| CUT INCREMENT | ACTUAL INCH | ACTUAL FOOT | WATTS 3.0W | WATTS 4.5W | WATTS 6.0W | NOMINAL LENGTH |
|---|---|---|---|---|---|---|
| 006 | 13.26 | 1.11 | 3.03 | 4.55 | 6.06 | 1' |
| 007 | 15.28 | 1.27 | 3.54 | 5.30 | 7.07 | |
| 008 | 17.30 | 1.44 | 4.04 | 6.06 | 8.08 | |
| 009 | 19.32 | 1.61 | 4.55 | 6.82 | 9.09 | |
| 010 | 21.34 | 1.78 | 5.05 | 7.58 | 10.10 | |
| 011 | 23.36 | 1.95 | 5.56 | 8.33 | 11.11 | 2' |
| 012 | 25.38 | 2.12 | 6.06 | 9.09 | 12.12 | |
| 013 | 27.40 | 2.28 | 6.57 | 9.85 | 13.13 | |
| 014 | 29.42 | 2.45 | 7.07 | 10.61 | 14.14 | |
| 015 | 31.44 | 2.62 | 7.58 | 11.36 | 15.15 | |
| 016 | 33.46 | 2.79 | 8.08 | 12.12 | 16.16 | |
| 017 | 35.48 | 2.96 | 8.59 | 12.88 | 17.17 | 3' |
| 018 | 37.50 | 3.13 | 9.09 | 13.64 | 18.18 | |
| 019 | 39.52 | 3.29 | 9.60 | 14.39 | 19.19 | |
| 020 | 41.54 | 3.46 | 10.10 | 15.15 | 20.20 | |
| 021 | 43.56 | 3.63 | 10.61 | 15.91 | 21.21 | |
| 022 | 45.58 | 3.80 | 11.11 | 16.67 | 22.22 | |
| 023 | 47.60 | 3.97 | 11.62 | 17.42 | 23.23 | 4' |
| 024 | 49.62 | 4.14 | 12.12 | 18.18 | 24.24 | |
| 025 | 51.64 | 4.30 | 12.63 | 18.94 | 25.25 | |
| 026 | 53.66 | 4.47 | 13.13 | 19.70 | 26.26 | |
| 027 | 55.68 | 4.64 | 13.64 | 20.45 | 27.27 | |
| 028 | 57.70 | 4.81 | 14.14 | 21.21 | 28.28 | |
| 029 | 59.72 | 4.98 | 14.65 | 21.97 | 29.29 | 5' |
| 030 | 61.74 | 5.15 | 15.15 | 22.73 | 30.30 | |
| 031 | 63.76 | 5.31 | 15.66 | 23.48 | 31.31 | |
| 032 | 65.78 | 5.48 | 16.16 | 24.24 | 32.32 | |
| 033 | 67.80 | 5.65 | 16.67 | 25.00 | 33.33 | |
| 034 | 69.82 | 5.82 | 17.17 | 25.76 | 34.34 | |
| 035 | 71.84 | 5.99 | 17.68 | 26.51 | 35.35 | 6' |
| 036 | 73.86 | 6.16 | 18.18 | 27.27 | 36.36 | |
| 037 | 75.88 | 6.32 | 18.69 | 28.03 | 37.37 | |
| 038 | 77.90 | 6.49 | 19.19 | 28.79 | 38.38 | 6.5' |


Tivoli, LLC. reserves the right to modify this specification without prior notice.

## Length Order Guide (Front - Non Apply DED)


Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below.
Total product length received will include added end-prep of choice within a tolerance (± 0.25") - See example (B) below

Example (A)

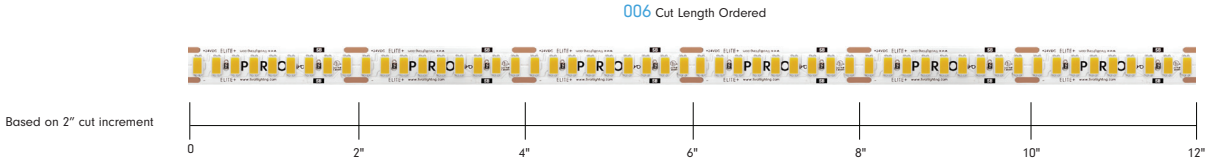


Example (B)

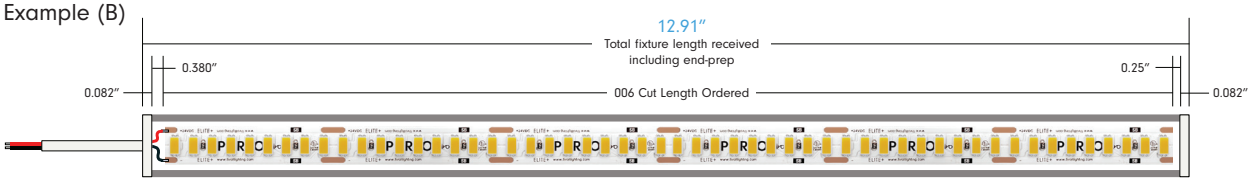


| CUT INCREMENT | ACTUAL INCH | ACTUAL FOOT | WATTS 3.0W | WATTS 4.5W | WATTS 6.0W | NOMINAL LENGTH |
|---|---|---|---|---|---|---|
| 006 | 12.91 | 1.08 | 3.03 | 4.55 | 6.06 | 1' |
| 007 | 14.93 | 1.24 | 3.54 | 5.30 | 7.07 | |
| 008 | 16.95 | 1.41 | 4.04 | 6.06 | 8.08 | |
| 009 | 18.97 | 1.58 | 4.55 | 6.82 | 9.09 | |
| 010 | 20.99 | 1.75 | 5.05 | 7.58 | 10.10 | |
| 011 | 23.01 | 1.92 | 5.56 | 8.33 | 11.11 | |
| 012 | 25.03 | 2.09 | 6.06 | 9.09 | 12.12 | 2' |
| 013 | 27.05 | 2.25 | 6.57 | 9.85 | 13.13 | |
| 014 | 29.07 | 2.42 | 7.07 | 10.61 | 14.14 | |
| 015 | 31.09 | 2.59 | 7.58 | 11.36 | 15.15 | |
| 016 | 33.11 | 2.76 | 8.08 | 12.12 | 16.16 | |
| 017 | 35.13 | 2.93 | 8.59 | 12.88 | 17.17 | |
| 018 | 37.15 | 3.10 | 9.09 | 13.64 | 18.18 | 3' |
| 019 | 39.17 | 3.26 | 9.60 | 14.39 | 19.19 | |
| 020 | 41.19 | 3.43 | 10.10 | 15.15 | 20.20 | |
| 021 | 43.21 | 3.60 | 10.61 | 15.91 | 21.21 | |
| 022 | 45.23 | 3.77 | 11.11 | 16.67 | 22.22 | |
| 023 | 47.25 | 3.94 | 11.62 | 17.42 | 23.23 | |
| 024 | 49.27 | 4.11 | 12.12 | 18.18 | 24.24 | 4' |
| 025 | 51.29 | 4.27 | 12.63 | 18.94 | 25.25 | |
| 026 | 53.31 | 4.44 | 13.13 | 19.70 | 26.26 | |
| 027 | 55.33 | 4.61 | 13.64 | 20.45 | 27.27 | |
| 028 | 57.35 | 4.78 | 14.14 | 21.21 | 28.28 | |
| 029 | 59.37 | 4.95 | 14.65 | 21.97 | 29.29 | |
| 030 | 61.39 | 5.12 | 15.15 | 22.73 | 30.30 | 5' |
| 031 | 63.41 | 5.28 | 15.66 | 23.48 | 31.31 | |
| 032 | 65.43 | 5.45 | 16.16 | 24.24 | 32.32 | |
| 033 | 67.45 | 5.62 | 16.67 | 25.00 | 33.33 | |
| 034 | 69.47 | 5.79 | 17.17 | 25.76 | 34.34 | |
| 035 | 71.49 | 5.96 | 17.68 | 26.51 | 35.35 | |
| 036 | 73.51 | 6.13 | 18.18 | 27.27 | 36.36 | 6' |
| 037 | 75.53 | 6.29 | 18.69 | 28.03 | 37.37 | |
| 038 | 77.55 | 6.46 | 19.19 | 28.79 | 38.38 | 6.5' |


Tivoli, LLC. reserves the right to modify this specification without prior notice.

## Length Order Guide (Left, Right - Left, Right)


Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below.
Total product length received will include added end-prep of choice within a tolerance (± 0.25") - See example (B) below

Example (A)

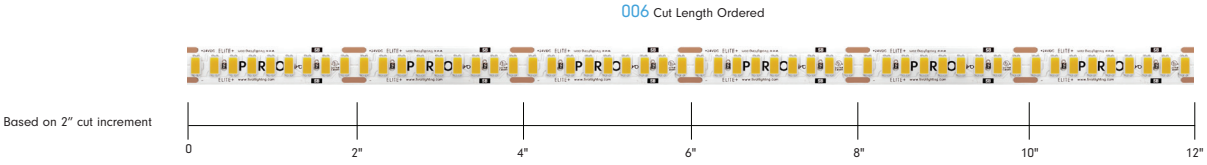


Example (B)

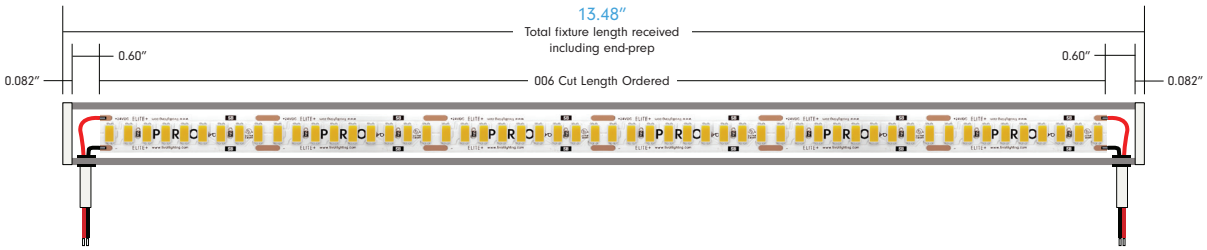


| CUT INCREMENT | ACTUAL INCH | ACTUAL FOOT | WATTS 3.0W | WATTS 4.5W | WATTS 6.0W | NOMINAL LENGTH |
|---|---|---|---|---|---|---|
| 006 | 13.48 | 1.12 | 3.03 | 4.55 | 6.06 | 1' |
| 007 | 15.50 | 1.29 | 3.54 | 5.30 | 7.07 | |
| 008 | 17.52 | 1.46 | 4.04 | 6.06 | 8.08 | |
| 009 | 19.54 | 1.63 | 4.55 | 6.82 | 9.09 | |
| 010 | 21.56 | 1.80 | 5.05 | 7.58 | 10.10 | |
| 011 | 23.58 | 1.97 | 5.56 | 8.33 | 11.11 | 2' |
| 012 | 25.60 | 2.13 | 6.06 | 9.09 | 12.12 | |
| 013 | 27.62 | 2.30 | 6.57 | 9.85 | 13.13 | |
| 014 | 29.64 | 2.47 | 7.07 | 10.61 | 14.14 | |
| 015 | 31.66 | 2.64 | 7.58 | 11.36 | 15.15 | |
| 016 | 33.68 | 2.81 | 8.08 | 12.12 | 16.16 | |
| 017 | 35.70 | 2.98 | 8.59 | 12.88 | 17.17 | 3' |
| 018 | 37.72 | 3.14 | 9.09 | 13.64 | 18.18 | |
| 019 | 39.74 | 3.31 | 9.60 | 14.39 | 19.19 | |
| 020 | 41.76 | 3.48 | 10.10 | 15.15 | 20.20 | |
| 021 | 43.78 | 3.65 | 10.61 | 15.91 | 21.21 | |
| 022 | 45.80 | 3.82 | 11.11 | 16.67 | 22.22 | |
| 023 | 47.82 | 3.99 | 11.62 | 17.42 | 23.23 | 4' |
| 024 | 49.84 | 4.15 | 12.12 | 18.18 | 24.24 | |
| 025 | 51.86 | 4.32 | 12.63 | 18.94 | 25.25 | |
| 026 | 53.88 | 4.49 | 13.13 | 19.70 | 26.26 | |
| 027 | 55.90 | 4.66 | 13.64 | 20.45 | 27.27 | |
| 028 | 57.92 | 4.83 | 14.14 | 21.21 | 28.28 | |
| 029 | 59.94 | 5.00 | 14.65 | 21.97 | 29.29 | 5' |
| 030 | 61.96 | 5.16 | 15.15 | 22.73 | 30.30 | |
| 031 | 63.98 | 5.33 | 15.66 | 23.48 | 31.31 | |
| 032 | 66.00 | 5.50 | 16.16 | 24.24 | 32.32 | |
| 033 | 68.02 | 5.67 | 16.67 | 25.00 | 33.33 | |
| 034 | 70.04 | 5.84 | 17.17 | 25.76 | 34.34 | |
| 035 | 72.06 | 6.01 | 17.68 | 26.51 | 35.35 | 6' |
| 036 | 74.08 | 6.17 | 18.18 | 27.27 | 36.36 | |
| 037 | 76.10 | 6.34 | 18.69 | 28.03 | 37.37 | |


Tivoli, LLC. reserves the right to modify this specification without prior notice.

## Length Order Guide (Left, Right - Non Apply DED)


Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below.
Total product length received will include added end-prep of choice within a tolerance (± 0.25") - See example (B) below

Example (A)

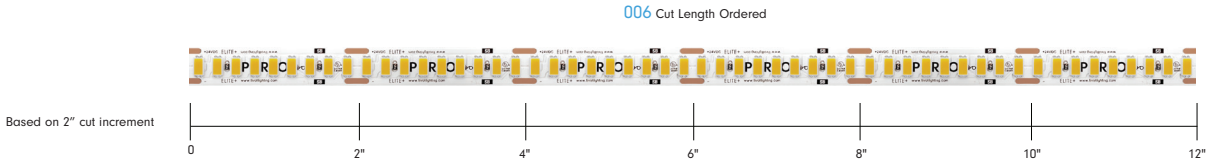


Example (B)

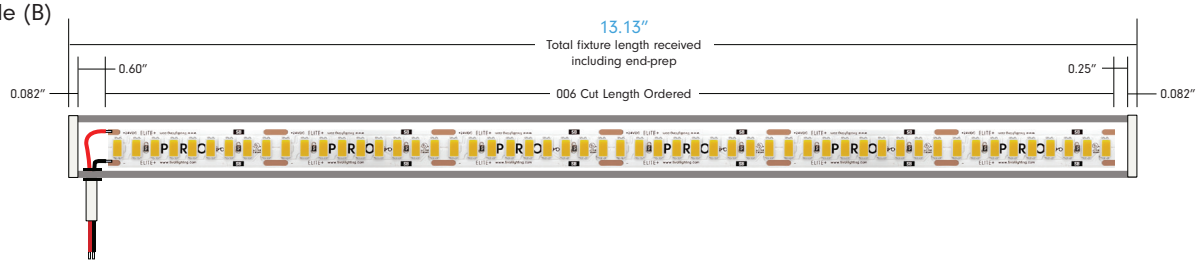


| CUT INCREMENT | ACTUAL INCH | ACTUAL FOOT | WATTS 3.0W | WATTS 4.5W | WATTS 6.0W | NOMINAL LENGTH |
|---|---|---|---|---|---|---|
| 006 | 13.13 | 1.09 | 3.03 | 4.55 | 6.06 | 1' |
| 007 | 15.15 | 1.26 | 3.54 | 5.30 | 7.07 | |
| 008 | 17.17 | 1.43 | 4.04 | 6.06 | 8.08 | |
| 009 | 19.19 | 1.60 | 4.55 | 6.82 | 9.09 | |
| 010 | 21.21 | 1.77 | 5.05 | 7.58 | 10.10 | |
| 011 | 23.23 | 1.94 | 5.56 | 8.33 | 11.11 | |
| 012 | 25.25 | 2.10 | 6.06 | 9.09 | 12.12 | 2' |
| 013 | 27.27 | 2.27 | 6.57 | 9.85 | 13.13 | |
| 014 | 29.29 | 2.44 | 7.07 | 10.61 | 14.14 | |
| 015 | 31.31 | 2.61 | 7.58 | 11.36 | 15.15 | |
| 016 | 33.33 | 2.78 | 8.08 | 12.12 | 16.16 | |
| 017 | 35.35 | 2.95 | 8.59 | 12.88 | 17.17 | |
| 018 | 37.37 | 3.11 | 9.09 | 13.64 | 18.18 | 3' |
| 019 | 39.39 | 3.28 | 9.60 | 14.39 | 19.19 | |
| 020 | 41.41 | 3.45 | 10.10 | 15.15 | 20.20 | |
| 021 | 43.43 | 3.62 | 10.61 | 15.91 | 21.21 | |
| 022 | 45.45 | 3.79 | 11.11 | 16.67 | 22.22 | |
| 023 | 47.47 | 3.96 | 11.62 | 17.42 | 23.23 | |
| 024 | 49.49 | 4.12 | 12.12 | 18.18 | 24.24 | 4' |
| 025 | 51.51 | 4.29 | 12.63 | 18.94 | 25.25 | |
| 026 | 53.53 | 4.46 | 13.13 | 19.70 | 26.26 | |
| 027 | 55.55 | 4.63 | 13.64 | 20.45 | 27.27 | |
| 028 | 57.57 | 4.80 | 14.14 | 21.21 | 28.28 | |
| 029 | 59.59 | 4.97 | 14.65 | 21.97 | 29.29 | |
| 030 | 61.61 | 5.13 | 15.15 | 22.73 | 30.30 | 5' |
| 031 | 63.63 | 5.30 | 15.66 | 23.48 | 31.31 | |
| 032 | 65.65 | 5.47 | 16.16 | 24.24 | 32.32 | |
| 033 | 67.67 | 5.64 | 16.67 | 25.00 | 33.33 | |
| 034 | 69.69 | 5.81 | 17.17 | 25.76 | 34.34 | |
| 035 | 71.71 | 5.98 | 17.68 | 26.51 | 35.35 | |
| 036 | 73.73 | 6.14 | 18.18 | 27.27 | 36.36 | 6' |
| 037 | 75.75 | 6.31 | 18.69 | 28.03 | 37.37 | |
| 038 | 77.77 | 6.48 | 19.19 | 28.79 | 38.38 | 6.5' |

Tivoli, LLC. reserves the right to modify this specification without prior notice.

## Mounting Hardware



**MRSL-CLP-SLV**
Metal clip



**UNIV-ADJ-MTBK**
Universal Adjustable Mounting Bracketlengths

## In-Wall Controls




**TVOQ-2-BK**
Black




**TVOQ-10-XX-7**
**XX** = **BK** (Black), **WH** (White)




**LTEC-UB5**
5-channel DMX compatible (RGBWY)Touch enabled Multi-scene and zone with App and Bluetooth connectivity

## Controls



**MDRX-AURA-XX**
**X** = **02, 12, 32** (ports)
MADRIX Aura is a stand-alone controller for up to 2, 12, or 32 universes per unit



**SP630E-S**
All-In-One SPI/PWM Controller
Note: Control with available BT app or optional SP630E-R remote

## Newtwork Accessories



**DMX-SPLT-X**
**X**= **2, 4, 8** (Output Channels)
DMX Splitter
1 Input to 8 Output
Ethernet or Hardwire Connection



**ARTNET-L-X-512**
**X** = **8** (8 Ports), **16** (Ports)
8 or 16 port universe Artnet to DMX interface, 16 port 8192



**NTG-SWI-XXPT**
**XX** = **8** (8 Ports), **16** (16 Ports)
NETGEAR 16-Port gigabit Unmanaged Switch



**MDRX-LUNA-XX**
**X** = **04, 08, 16** (ports)
MADRIX Luna 4, 8, 16 port universe Artnet to DMX interface 16 port 8192, 8 port 4096, 4 port 2048 DMX channels

Tivoli, LLC. reserves the right to modify this specification without prior notice.
Copyright © Tivoli 10/19/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

# Power Supplies

## MLV / ELV / 0-10V / PWM / TRIAC

| DESCRIPTION | CAT NO | APPLICATION | PRIMARY VOLTAGE | SECONDARY VOLTAGE | CIRCUIT BREAKERS | MAX LOAD | MIN LOAD | CIRCUIT CAPACITY |
|---|---|---|---|---|---|---|---|---|
| Infinity Direct Series Class 2 Transformer | INF-DR-J-30-1-1.3-24 | Indoor / Outdoor | 100 - 277V AC | 24V DC | 1 | 30W | 6W | 1.3A |
| | INF-DR-J-60-1-2.5-24 | | | | 1 | 60W | 12W | 2.5A |
| | INF-DR-J-96-1-4-24 | | | | 1 | 96W | 19.2W | 4A |
| | INF-DR-J-192-2-4-24 | | | | 2 | 2x96W | 2x28.8W | 2x4A |
| | INF-DR-J-288-3-4-24 | | | | 3 | 3x96W | 3X43.2W | 3x4A |

## TITLE 24 COMPLIANT

| **DESCRIPTION** | **CAT NO** | **APPLICATION** | **PRIMARY VOLTAGE** | **SECONDARY VOLTAGE** | **CIRCUIT BREAKERS** | **MAX LOAD** | **CIRCUIT CAPACITY** |
|---|---|---|---|---|---|---|---|
| ER Series Class 2 Driver | ER-80-1-3.3-24-D | Indoor / Outdoor | 100-277V AC 5o//60 Hz | 24V DC | 1 | 80W | 3.3A |
| ER Series Class 2 0-10V Dimming | ERG-80-24-DIM1-10 | | | | | | |

## NON DIMMING

| DESCRIPTION | CAT NO | APPLICATION | PRIMARY VOLTAGE | SECONDARY VOLTAGE | CIRCUIT BREAKERS | MAX LOAD | CIRCUIT CAPACITY |
|---|---|---|---|---|---|---|---|
| ADUL Series Class 2 Transformer | ADUL-120-1-4-24-D | Indoor / Damp | 100-277V AC 50/60 HZ | 24V DC | 1 | 96W | 4A |
| | ADUL-240-2-4-24-D | | | | 2 | 2x96W | 2x4A |
| | ADUL-320-3-4-24-D | | | | 3 | 3x96W | 3x4A |

## 0-10V DIMMING

| DESCRIPTION | CAT NO | APPLICATION | PRIMARY VOLTAGE | SECONDARY VOLTAGE | CIRCUIT BREAKERS | MAX LOAD | CIRCUIT CAPACITY |
|---|---|---|---|---|---|---|---|
| ADUL Series Class 2 Transformer | ADUL-120-1-4-24-DOT | Indoor / Damp | 100-277V AC 50/60 HZ | 24V DC | 1 | 96W | 4A |
| | ADUL-240-2-4-24-DOT | | | | 2 | 2x96W | 2x4A |
| | ADUL-320-3-4-24-DOT | | | | 3 | 3x96W | 3x4A |

## DMX SINGLE ADDRESS

| DESCRIPTION | CAT NO | APPLICATION | PRIMARY VOLTAGE | SECONDARY VOLTAGE | CIRCUIT BREAKERS | MAX LOAD | CIRCUIT CAPACITY |
|---|---|---|---|---|---|---|---|
| ADUL Series Class 2 Transformer | ADUL-120-1-4-24-DIN | Indoor / Damp | 100-277V AC 50/60 HZ | 24V DC | 1 | 96W | 4A |
| | ADUL-240-2-4-24-DIN | | | | 2 | 2x96W | 2x4A |
| | ADUL-320-3-4-24-DIN | | | | 3 | 3x96W | 3x4A |

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 10/19/26



www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

# Power Supplies

## DMX MULTI ADDRESS

| DESCRIPTION | CAT NO | APPLICATION | PRIMARY VOLTAGE | SECONDARY VOLTAGE | CIRCUIT BREAKERS | MAX LOAD | CIRCUIT CAPACITY |
|---|---|---|---|---|---|---|---|
| ADUL Series Class 2 Transformer | ADUL-240-2-4-24-DIN-2 | Indoor / Damp | 100-277V AC 5o//60 Hz | 24V DC | 2 | 2x96W | 2x4A |
| | ADUL-320-3-4-24-DIN-3 | | | | 3 | 3x96W | 3x4A |

## DMX/DALI FLICKER-FREE FOR TV STUDIO

| **DESCRIPTION** | **CAT NO** | **APPLICATION** | **PRIMARY VOLTAGE** | **SECONDARY VOLTAGE** | **CIRCUIT BREAKERS** | **MAX LOAD** | **CIRCUIT CAPACITY** |
|---|---|---|---|---|---|---|---|
| ADNM Series Class 2 Transformer | ADNM-120-1-4-24-DTV | Indoor / Outdoor | 100-277V AC 50/60 HZ | 24V DC | 1 | 1x96W | 1x4A |
| | ADNM-240-2-4-24-DTV | | | | 2 | 2x96W | 2x4A |
| | ADNM-320-3-4-24-DTV | | | | 3 | 3x96W | 3x4A |

# Dimmers

## DIMMING - 0-10V

| DESCRIPTION | CAT NO | APPLICATION | INPUT VOLTAGE | OUTPUT VOLTAGE | MAX LOAD |
|---|---|---|---|---|---|
| 0-10V Dimmer | DIM-LD-010 | Indoor | 12V/24V DC | 12V/24V DC | 30 mA max. output (sink only) |

## DIMMING - MLV

| **DESCRIPTION** | **CAT NO** | **APPLICATION** | **INPUT VOLTAGE** | **OUTPUT VOLTAGE** | **MAX LOAD** |
|---|---|---|---|---|---|
| MLV Dimmer | N-600 | Indoor | 120V AC | 120V AC | 450W |
| | N-1000 | | | | 800W |
| | N-1500 | | | | 1200W |
| | D-600 | | | | 450W |
| | M-600 | | | | 450W |
| | M-1000 | | | | 800W |

## DIMMING - ELV

| **DESCRIPTION** | **CAT NO** | **APPLICATION** | **INPUT VOLTAGE** | **OUTPUT VOLTAGE** | **MAX LOAD** |
|---|---|---|---|---|---|
| ELV Dimmer | ME-600 | Indoor | 120V AC | 120V AC | 450W |
| | DE-300 | | | | 300W |

Tivoli, LLC. reserves the right to modify this specification without prior notice.