RIDGELINE

Pre-Built Fixture - ELITE+ Static White

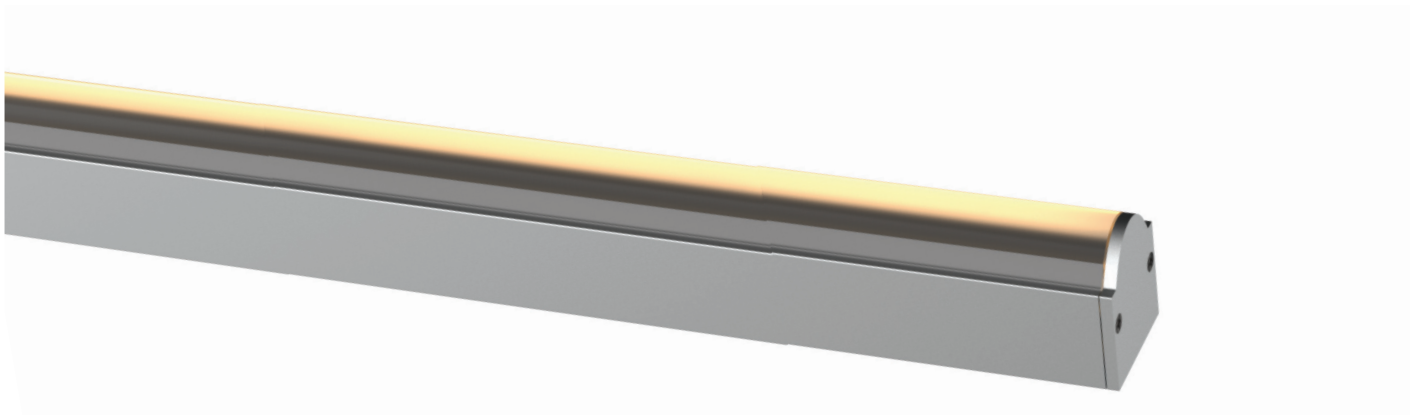

Project: _____ Type: _____

- Delivers a sleek grazer effect with available 10 degree or 30 degree lens option
- Optional snap-on baffle for glare control
- Available in selected CCT options for consistent focus on high CRI values
- Delivered ready to install with integrated light engine, housing, and factory-installed power leads.
- Available in fixture lengths from 1 ft to 8 ft to accommodate a wide range of architectural applications.
- MLV, ELV, 0-10V and DMX supported control systems
- Low Voltage 24V DC
- IP54 Rating
- 5 Year Warranty

Dimensions

Metal Clip

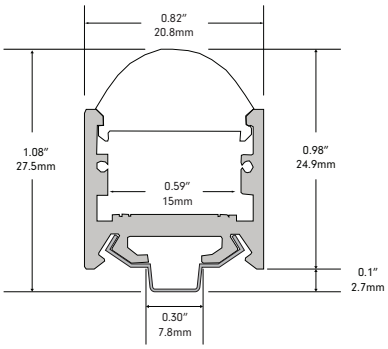

Metal Clip with Baffle

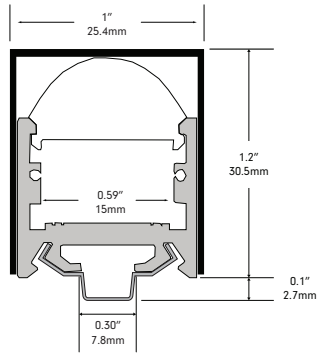

Adjustable Bracket

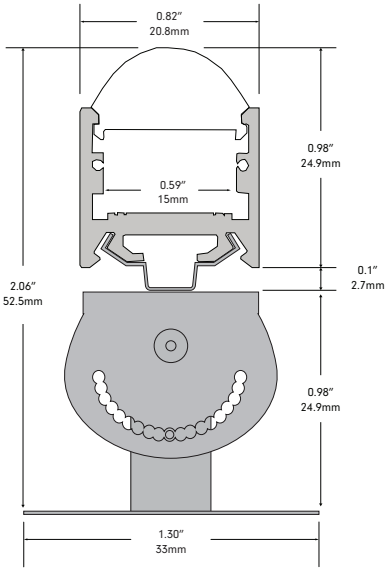

Adjustable Bracket with Baffle

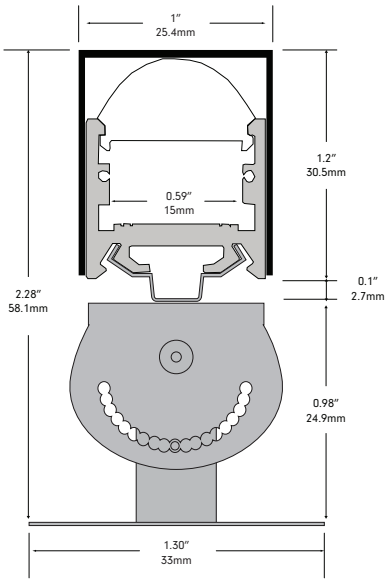

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 09/22/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Specification

PRODUCT CODE	INTENSITY	LOCATION	CCT	FINISH	LENS	FIRST POWER LEAD	FIRST POSITION TYPE	SECOND POWER LEAD	SECOND POSITION TYPE	MOUNTING	LENGTH
RIDG		**I**									
RIDG = Ridgeline	**EPX** = Elite+ XLB **EPL** = Elite+ LB **EPS** = Elite+ SB **EPH** = Elite+ HO **EPV** = Elite+ VHO **EPU** = Elite+ UHO	**I** = Indoor	**18** = 1800K **22** = 2200K **24** = 2400K **27** = 2700K **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K	**SL** = Silver **BK** = Black **WH** = White	**10** = 10 degree **30** = 30 degree	**B2B24** = 24" 2 Bare Wire Power Lead, Black **B2W24** = 24" 2 Bare Wire Power Lead, White **P2B24** = 24" 2 planum rated bare wire power lead, black **P2W24** = 24" 2 Planum Rated Bare Wire Power Lead, White **CB06** = 6" DC FEMALE Barrel Power Lead, Black, Indoor **CW06** = 6" DC FEMALE Barrel Power Lead, White, Indoor	**F** = Front **B** = Bottom **L** = Left **R** = Right **N** = Non Apply	**B2B24** = 24" 2 Bare Wire Power Lead, Black **B2W24** = 24" 2 Bare Wire Power Lead, White **P2B24** = 24" 2 planum rated bare wire power lead, black **P2W24** = 24" 2 Planum Rated Bare Wire Power Lead, White **CB06** = 6" DC MALE Barrel Power Lead, Black, Indoor **CW06** = 6" DC MALE Barrel Power Lead, White, Indoor **DED** = Dead End	**F** = Front **B** = Bottom **L** = Left **R** = Right **N** = Non Apply	**C** = Clip **J** = Adjustable	**See Chart**

Specification - 10° Lens (no baffle)

XLB Low Brightness

Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93.5	93.5	93.5	93.5	93.5	94	93.7	93.5
R9	69.7	69.7	69.7	69.7	69.7	69.7	67.9	67.9
Measured Power W/ft	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Listed Power W/ft.	0.6							
Max Run	64'							

LB Low Brightness

Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93.2	93	94	94	92.9	93	93.6	94
R9	59.2	69.8	69.8	69.8	69.8	69.8	62.7	62.7
Measured Power W/ft	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
Listed Power W/ft.	1.5							
Max Run	64'							

SB Standard Brightness

Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93.2	92.6	93.2	92.7	93.4	94	93.4	94.1
R9	58.2	62.9	62.9	65.5	68.9	68.9	61.9	77.9
Measured Power W/ft	3.0	3.0	3.0	3.0	2.97	2.5	3.0	3.0
Listed Power W/ft.	3.2							
Max Run	29'							

HO High Output

Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93	93	93	93	93	92	93	94
R9	59	56.5	63.2	68.6	68.6	68.9	60.8	75.9
Measured Power W/ft	4.3	4.3	4.3	4.25	4.26	4.3	4.3	4.3
Listed Power W/ft.	4.5							
Max Run	20'							

VHO Very High Output

Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93	93	93	93	93.2	93	93.1	93
R9	68.3	68.3	68.3	68.3	68.3	68.3	60	60
Measured Power W/ft	6.08	6.08	6.08	6.08	6.08	6.08	6.1	6.08
Listed Power W/ft.	7							
Max Run	13'							

UHO Ultra High Output

Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93	93	93	93	93	93	93	93
R9	67.6	67.6	67.6	67.6	67.6	67.6	59.7	59.7
Measured Power W/ft	8.5	8.2	8.5	8.2	8.5	8.5	8.2	8.5
Listed Power W/ft.	9							
Max Run	10'							

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Specification - 30° Lens (no baffle)

XLB Low Brightness								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	37	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	73	CF	CF	CF
CRI	CF	CF	CF	CF	95.1	CF	CF	CF
R9	CF	CF	CF	CF	74	CF	CF	CF
Measured Power W/ft	CF	CF	CF	CF	0.5	CF	CF	CF
Listed Power W/ft.	0.6							
Max Run	64'							

LB Low Brightness								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	93.7	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	68	CF	CF	CF
CRI	CF	CF	CF	CF	94.9	CF	CF	CF
R9	CF	CF	CF	CF	74	CF	CF	CF
Measured Power W/ft	CF	CF	CF	CF	1.4	CF	CF	CF
Listed Power W/ft.	1.5							
Max Run	64'							

SB Standard Brightness								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	202	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	66	CF	CF	CF
CRI	CF	CF	CF	CF	94.6	CF	CF	CF
R9	CF	CF	CF	CF	73	CF	CF	CF
Measured Power W/ft	CF	CF	CF	CF	3.1	CF	CF	CF
Listed Power W/ft.	3.2							
Max Run	29'							

HO High Output								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	289	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	67	CF	CF	CF
CRI	CF	CF	CF	CF	96.1	CF	CF	CF
R9	CF	CF	CF	CF	80	CF	CF	CF
Measured Power W/ft	CF	CF	CF	CF	4.3	CF	CF	CF
Listed Power W/ft.	4.5							
Max Run	20'							

VHO Very High Output								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	417	CF	449	CF
Efficacy (Lm/W)	CF	CF	CF	CF	65	CF	74	CF
CRI	CF	CF	CF	CF	94.4	CF	94.6	CF
R9	CF	CF	CF	CF	71.4	CF	70	CF
Measured Power W/ft					6.4		6.1	
Listed Power W/ft.	7							
Max Run	13'							

UHO Ultra High Output								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	604	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	69	CF	CF	CF
CRI	CF	CF	CF	CF	94.3	CF	CF	CF
R9	CF	CF	CF	CF	77	CF	CF	CF
Measured Power W/ft	CF	CF	CF	CF	8.8	CF	CF	CF
Listed Power W/ft.	9							
Max Run	10'							

Specification - 10° Lens (with baffle)

XLB Low Brightness								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93.5	93.5	93.5	93.5	93.5	94	93.7	93.5
R9	69.7	69.7	69.7	69.7	69.7	69.7	67.9	67.9
Measured Power W/ft	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Listed Power W/ft.	0.6							
Max Run	64'							

LB Low Brightness								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93.2	93	94	94	92.9	93	93.6	94
R9	59.2	69.8	69.8	69.8	69.8	69.8	62.7	62.7
Measured Power W/ft	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
Listed Power W/ft.	1.5							
Max Run	64'							

SB Standard Brightness								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93.2	92.6	93.2	92.7	93.4	94	93.4	94.1
R9	58.2	62.9	62.9	65.5	68.9	68.9	61.9	77.9
Measured Power W/ft	3.0	3.0	3.0	3.0	2.97	2.5	3.0	3.0
Listed Power W/ft.	3.2							
Max Run	29'							

HO High Output								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93	93	93	93	93	92	93	94
R9	59	56.5	63.2	68.6	68.6	68.9	60.8	75.9
Measured Power W/ft	4.3	4.3	4.3	4.25	4.26	4.3	4.3	4.3
Listed Power W/ft.	4.5							
Max Run	20'							

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Specification - 10° Lens (with baffle)

VHO Very High Output								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93	93	93	93	93.2	93	93.1	93
R9	68.3	68.3	68.3	68.3	68.3	68.3	60	60
Measured Power W/ft	6.08	6.08	6.08	6.08	6.08	6.08	6.1	6.08
Listed Power W/ft.	7							
Max Run	13'							

UHO Ultra High Output								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93	93	93	93	93	93	93	93
R9	67.6	67.6	67.6	67.6	67.6	67.6	59.7	59.7
Measured Power W/ft	8.5	8.2	8.5	8.2	8.5	8.5	8.2	8.5
Listed Power W/ft.	9							
Max Run	10'							

Specification - 30° Lens (with baffle)

XLB Low Brightness								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93.5	93.5	93.5	93.5	93.5	94	93.7	93.5
R9	69.7	69.7	69.7	69.7	69.7	69.7	67.9	67.9
Measured Power W/ft	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Listed Power W/ft.	0.6							
Max Run	64'							

LB Low Brightness								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93.2	93	94	94	92.9	93	93.6	94
R9	59.2	69.8	69.8	69.8	69.8	69.8	62.7	62.7
Measured Power W/ft	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
Listed Power W/ft.	1.5							
Max Run	64'							

SB Standard Brightness								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93.2	92.6	93.2	92.7	93.4	94	93.4	94.1
R9	58.2	62.9	62.9	65.5	68.9	68.9	61.9	77.9
Measured Power W/ft	3.0	3.0	3.0	3.0	2.97	2.5	3.0	3.0
Listed Power W/ft.	3.2							
Max Run	29'							

HO High Output								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93	93	93	93	93	92	93	94
R9	59	56.5	63.2	68.6	68.6	68.9	60.8	75.9
Measured Power W/ft	4.3	4.3	4.3	4.25	4.26	4.3	4.3	4.3
Listed Power W/ft.	4.5							
Max Run	20'							

VHO Very High Output								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93	93	93	93	93.2	93	93.1	93
R9	68.3	68.3	68.3	68.3	68.3	68.3	60	60
Measured Power W/ft	6.08	6.08	6.08	6.08	6.08	6.08	6.1	6.08
Listed Power W/ft.	7							
Max Run	13'							

UHO Ultra High Output								
Kelvin Temperature	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumens/ft	CF	CF	CF	CF	CF	CF	CF	CF
Efficacy (Lm/W)	CF	CF	CF	CF	CF	CF	CF	CF
CRI	93	93	93	93	93	93	93	93
R9	67.6	67.6	67.6	67.6	67.6	67.6	59.7	59.7
Measured Power W/ft	8.5	8.2	8.5	8.2	8.5	8.5	8.2	8.5
Listed Power W/ft.	9							
Max Run	10'							

Overall Specification

Electrical	
Input Voltage	24V
Dimming	MLV/ELV/0-10V/DMX
Physical	
LED Package	2835
LEDs/ft	73
Copper Trace	4 Ounce
Cut Increments	1.33" (34mm)
Operating Temperature	-40°F (-40°C) ~ +140°F (+60°C)

Certification and Testing	
Certification	UL Listed, CE
Lumen Maintenance (L70)	60,000 hrs
Binning Tolerance	1.5 Step MacAdam Elipse
Environment	IP54 Damp Location
Warranty	5 years

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 09/22/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Length Order Guide (Front - Front)

Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below.
Total product length received will include added end-prep of choice within a tolerance (± 0.25") - See example (B) below

Example (A)

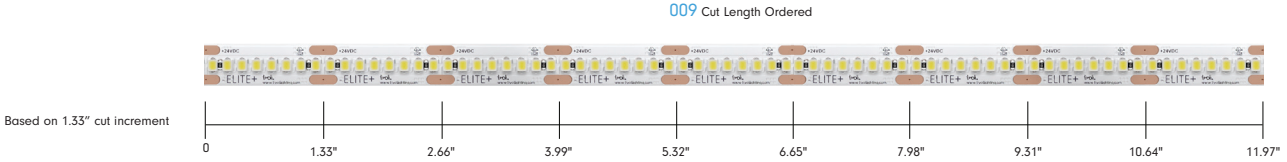

Example (B)

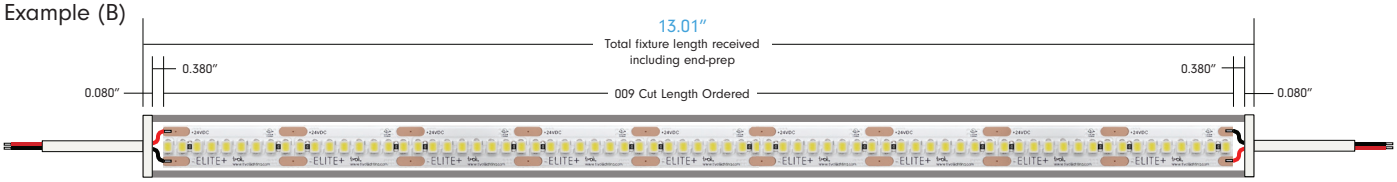

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 0.6W	WATTS 1.5W	WATTS 3.2W	WATTS 4.5W	WATTS 7.0W	WATTS 9.0W	NOMINAL LENGTH
009	13.01	1.08	0.60	1.51	3.22	4.53	7.05	9.07	1'
010	14.35	1.20	0.67	1.68	3.58	5.04	7.84	10.07	
011	15.70	1.31	0.74	1.85	3.94	5.54	8.62	11.08	
012	17.04	1.42	0.81	2.02	4.30	6.05	9.40	12.09	
013	18.38	1.53	0.87	2.18	4.66	6.55	10.19	13.10	
014	19.73	1.64	0.94	2.35	5.01	7.05	10.97	14.10	
015	21.07	1.76	1.01	2.52	5.37	7.56	11.75	15.11	
016	22.41	1.87	1.07	2.69	5.73	8.06	12.54	16.12	
017	23.76	1.98	1.14	2.85	6.09	8.56	13.32	17.13	2'
018	25.10	2.09	1.21	3.02	6.45	9.07	14.10	18.13	
019	26.44	2.20	1.28	3.19	6.81	9.57	14.89	19.14	
020	27.79	2.32	1.34	3.36	7.16	10.07	15.67	20.15	
021	29.13	2.43	1.41	3.53	7.52	10.58	16.46	21.16	
022	30.47	2.54	1.48	3.69	7.88	11.08	17.24	22.16	
023	31.82	2.65	1.54	3.86	8.24	11.59	18.02	23.17	
024	33.16	2.76	1.61	4.03	8.60	12.09	18.81	24.18	
025	34.50	2.88	1.68	4.20	8.96	12.59	19.59	25.19	
026	35.85	2.99	1.75	4.37	9.31	13.10	20.37	26.19	3'
027	37.19	3.10	1.81	4.53	9.67	13.60	21.16	27.20	
028	38.53	3.21	1.88	4.70	10.03	14.10	21.94	28.21	
029	39.88	3.32	1.95	4.87	10.39	14.61	22.72	29.22	
030	41.22	3.43	2.01	5.04	10.75	15.11	23.51	30.22	
031	42.56	3.55	2.08	5.21	11.10	15.62	24.29	31.23	
032	43.91	3.66	2.15	5.37	11.46	16.12	25.08	32.24	
033	45.25	3.77	2.22	5.54	11.82	16.62	25.86	33.25	
034	46.59	3.88	2.28	5.71	12.18	17.13	26.64	34.25	
035	47.94	3.99	2.35	5.88	12.54	17.63	27.43	35.26	4'
036	49.28	4.11	2.42	6.04	12.90	18.13	28.21	36.27	
037	50.62	4.22	2.49	6.21	13.25	18.64	28.99	37.28	
038	51.97	4.33	2.55	6.38	13.61	19.14	29.78	38.28	
039	53.31	4.44	2.62	6.55	13.97	19.65	30.56	39.29	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 0.6W	WATTS 1.5W	WATTS 3.2W	WATTS 4.5W	WATTS 7.0W	WATTS 9.0W	NOMINAL LENGTH
040	54.65	4.55	2.69	6.72	14.33	20.15	31.34	40.30	
041	56.00	4.67	2.75	6.88	14.69	20.65	32.13	41.31	
042	57.34	4.78	2.82	7.05	15.05	21.16	32.91	42.31	
043	58.68	4.89	2.89	7.22	15.40	21.66	33.69	43.32	
044	60.03	5.00	2.96	7.39	15.76	22.16	34.48	44.33	5'
045	61.37	5.11	3.02	7.56	16.12	22.67	35.26	45.34	
046	62.71	5.23	3.09	7.72	16.48	23.17	36.05	46.34	
047	64.06	5.34	3.16	7.89	16.84	23.68	36.83	47.35	
048	65.40	5.45	3.22	8.06	17.19	24.18	37.61	48.36	
049	66.74	5.56	3.29	8.23	17.55	24.68	38.40	49.37	
050	68.09	5.67	3.36	8.40	17.91	25.19	39.18	50.37	
051	69.43	5.79	3.43	8.56	18.27	25.69	39.96	51.38	
052	70.77	5.90	3.49	8.73	18.63	26.19	40.75	52.39	
053	72.12	6.01	3.56	8.90	18.99	26.70	41.53	53.40	6'
054	73.46	6.12	3.63	9.07	19.34	27.20	42.31	54.40	
055	74.80	6.23	3.69	9.24	19.70	27.71	43.10	55.41	
056	76.15	6.35	3.76	9.40	20.06	28.21	43.88	56.42	
057	77.49	6.46	3.83	9.57	20.42	28.71	44.66	57.43	
058	78.83	6.57	3.90	9.74	20.78	29.22	45.45	58.43	
059	80.18	6.68	3.96	9.91	21.13	29.72	46.23	59.44	
060	81.52	6.79	4.03	10.07	21.49	30.22	47.02	60.45	
061	82.86	6.91	4.10	10.24	21.85	30.73	47.80	61.46	
062	84.21	7.02	4.16	10.41	22.21	31.23	48.58	62.46	7'
063	85.55	7.13	4.23	10.58	22.57	31.74	49.37	63.47	
064	86.89	7.24	4.30	10.75	22.93	32.24	50.15	64.48	
065	88.24	7.35	4.37	10.91	23.28	32.74	50.93	65.49	
066	89.58	7.46	4.43	11.08	23.64	33.25	51.72	66.49	
067	90.92	7.58	4.50	11.25	24.00	33.75	52.50	67.50	
068	92.26	7.69	4.57	11.42	24.36	34.25	53.28	68.51	
069	93.61	7.80	4.63	11.59	24.72	34.76	54.07	69.52	
070	94.95	7.91	4.70	11.75	25.07	35.26	54.85	70.52	8'

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Length Order Guide (Front - Bottom, Left, Right **or** Bottom, Left, Right - Front)

Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below.
Total product length received will include added end-prep of choice within a tolerance (± 0.25") - See example (B) below

Example (A)

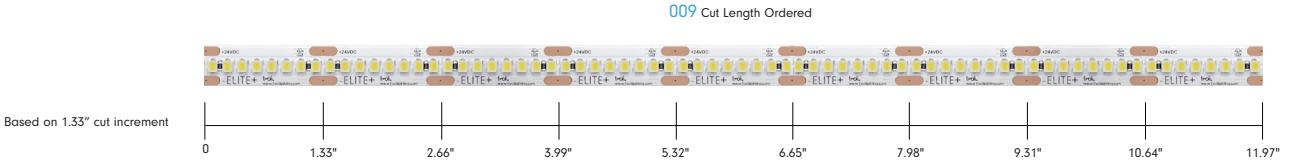

Example (B)

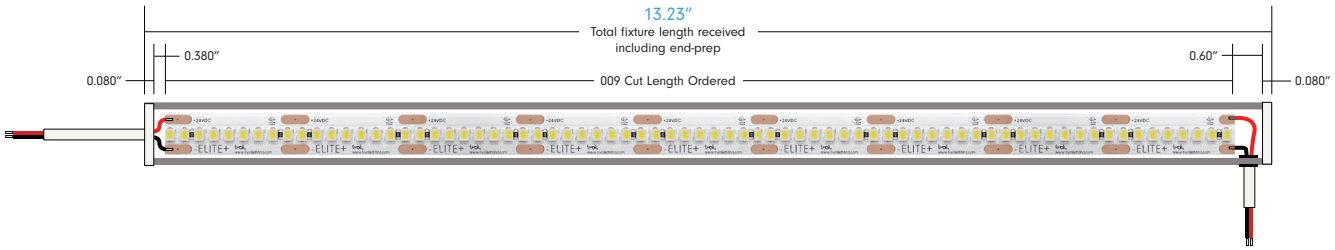

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 0.6W	WATTS 1.5W	WATTS 3.2W	WATTS 4.5W	WATTS 7.0W	WATTS 9.0W	NOMINAL LENGTH
008	11.89	0.99	0.54	1.34	2.87	4.03	6.27	8.06	1'
009	13.23	1.10	0.60	1.51	3.22	4.53	7.05	9.07	
010	14.57	1.21	0.67	1.68	3.58	5.04	7.84	10.07	
011	15.92	1.33	0.74	1.85	3.94	5.54	8.62	11.08	
012	17.26	1.44	0.81	2.02	4.30	6.05	9.40	12.09	
013	18.60	1.55	0.87	2.18	4.66	6.55	10.19	13.10	
014	19.95	1.66	0.94	2.35	5.01	7.05	10.97	14.10	
015	21.29	1.77	1.01	2.52	5.37	7.56	11.75	15.11	
016	22.63	1.89	1.07	2.69	5.73	8.06	12.54	16.12	2'
017	23.98	2.00	1.14	2.85	6.09	8.56	13.32	17.13	
018	25.32	2.11	1.21	3.02	6.45	9.07	14.10	18.13	
019	26.66	2.22	1.28	3.19	6.81	9.57	14.89	19.14	
020	28.01	2.33	1.34	3.36	7.16	10.07	15.67	20.15	
021	29.35	2.45	1.41	3.53	7.52	10.58	16.46	21.16	
022	30.69	2.56	1.48	3.69	7.88	11.08	17.24	22.16	
023	32.04	2.67	1.54	3.86	8.24	11.59	18.02	23.17	
024	33.38	2.78	1.61	4.03	8.60	12.09	18.81	24.18	
025	34.72	2.89	1.68	4.20	8.96	12.59	19.59	25.19	3'
026	36.07	3.01	1.75	4.37	9.31	13.10	20.37	26.19	
027	37.41	3.12	1.81	4.53	9.67	13.60	21.16	27.20	
028	38.75	3.23	1.88	4.70	10.03	14.10	21.94	28.21	
029	40.10	3.34	1.95	4.87	10.39	14.61	22.72	29.22	
030	41.44	3.45	2.01	5.04	10.75	15.11	23.51	30.22	
031	42.78	3.57	2.08	5.21	11.10	15.62	24.29	31.23	
032	44.13	3.68	2.15	5.37	11.46	16.12	25.08	32.24	
033	45.47	3.79	2.22	5.54	11.82	16.62	25.86	33.25	
034	46.81	3.90	2.28	5.71	12.18	17.13	26.64	34.25	4'
035	48.16	4.01	2.35	5.88	12.54	17.63	27.43	35.26	
036	49.50	4.12	2.42	6.04	12.90	18.13	28.21	36.27	
037	50.84	4.24	2.49	6.21	13.25	18.64	28.99	37.28	
038	52.19	4.35	2.55	6.38	13.61	19.14	29.78	38.28	
039	53.53	4.46	2.62	6.55	13.97	19.65	30.56	39.29	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 0.6W	WATTS 1.5W	WATTS 3.2W	WATTS 4.5W	WATTS 7.0W	WATTS 9.0W	NOMINAL LENGTH
040	54.87	4.57	2.69	6.72	14.33	20.15	31.34	40.30	
041	56.22	4.68	2.75	6.88	14.69	20.65	32.13	41.31	
042	57.56	4.80	2.82	7.05	15.05	21.16	32.91	42.31	
043	58.90	4.91	2.89	7.22	15.40	21.66	33.69	43.32	
044	60.25	5.02	2.96	7.39	15.76	22.16	34.48	44.33	5'
045	61.59	5.13	3.02	7.56	16.12	22.67	35.26	45.34	
046	62.93	5.24	3.09	7.72	16.48	23.17	36.05	46.34	
047	64.28	5.36	3.16	7.89	16.84	23.68	36.83	47.35	
048	65.62	5.47	3.22	8.06	17.19	24.18	37.61	48.36	
049	66.96	5.58	3.29	8.23	17.55	24.68	38.40	49.37	
050	68.31	5.69	3.36	8.40	17.91	25.19	39.18	50.37	
051	69.65	5.80	3.43	8.56	18.27	25.69	39.96	51.38	
052	70.99	5.92	3.49	8.73	18.63	26.19	40.75	52.39	
053	72.34	6.03	3.56	8.90	18.99	26.70	41.53	53.40	6'
054	73.68	6.14	3.63	9.07	19.34	27.20	42.31	54.40	
055	75.02	6.25	3.69	9.24	19.70	27.71	43.10	55.41	
056	76.37	6.36	3.76	9.40	20.06	28.21	43.88	56.42	
057	77.71	6.48	3.83	9.57	20.42	28.71	44.66	57.43	
058	79.05	6.59	3.90	9.74	20.78	29.22	45.45	58.43	
059	80.40	6.70	3.96	9.91	21.13	29.72	46.23	59.44	
060	81.74	6.81	4.03	10.07	21.49	30.22	47.02	60.45	
061	83.08	6.92	4.10	10.24	21.85	30.73	47.80	61.46	
062	84.43	7.04	4.16	10.41	22.21	31.23	48.58	62.46	7'
063	85.77	7.15	4.23	10.58	22.57	31.74	49.37	63.47	
064	87.11	7.26	4.30	10.75	22.93	32.24	50.15	64.48	
065	88.46	7.37	4.37	10.91	23.28	32.74	50.93	65.49	
066	89.80	7.48	4.43	11.08	23.64	33.25	51.72	66.49	
067	91.14	7.60	4.50	11.25	24.00	33.75	52.50	67.50	
068	92.48	7.71	4.57	11.42	24.36	34.25	53.28	68.51	
069	93.83	7.82	4.63	11.59	24.72	34.76	54.07	69.52	
070	95.17	7.93	4.70	11.75	25.07	35.26	54.85	70.52	8'

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Length Order Guide (Front - Non Apply DED)

Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below.
Total product length received will include added end-prep of choice within a tolerance (± 0.25") - See example (B) below

Example (A)

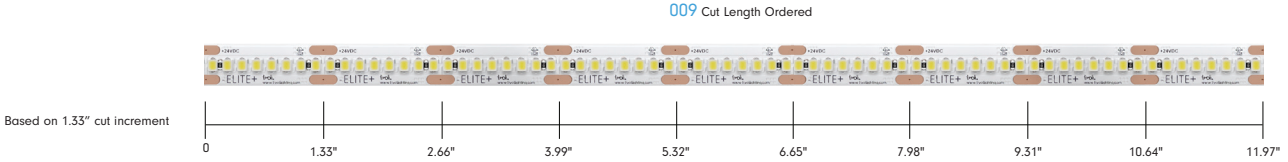

Example (B)

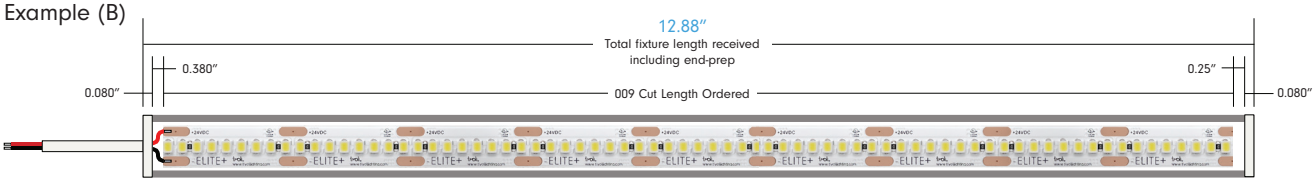

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 0.6W	WATTS 1.5W	WATTS 3.2W	WATTS 4.5W	WATTS 7.0W	WATTS 9.0W	NOMINAL LENGTH
008	11.54	0.96	0.54	1.34	2.87	4.03	6.27	8.06	1'
009	12.88	1.07	0.60	1.51	3.22	4.53	7.05	9.07	
010	14.22	1.19	0.67	1.68	3.58	5.04	7.84	10.07	
011	15.57	1.30	0.74	1.85	3.94	5.54	8.62	11.08	
012	16.91	1.41	0.81	2.02	4.30	6.05	9.40	12.09	
013	18.25	1.52	0.87	2.18	4.66	6.55	10.19	13.10	
014	19.60	1.63	0.94	2.35	5.01	7.05	10.97	14.10	
015	20.94	1.75	1.01	2.52	5.37	7.56	11.75	15.11	
016	22.28	1.86	1.07	2.69	5.73	8.06	12.54	16.12	
017	23.63	1.97	1.14	2.85	6.09	8.56	13.32	17.13	2'
018	24.97	2.08	1.21	3.02	6.45	9.07	14.10	18.13	
019	26.31	2.19	1.28	3.19	6.81	9.57	14.89	19.14	
020	27.66	2.30	1.34	3.36	7.16	10.07	15.67	20.15	
021	29.00	2.42	1.41	3.53	7.52	10.58	16.46	21.16	
022	30.34	2.53	1.48	3.69	7.88	11.08	17.24	22.16	
023	31.69	2.64	1.54	3.86	8.24	11.59	18.02	23.17	
024	33.03	2.75	1.61	4.03	8.60	12.09	18.81	24.18	
025	34.37	2.86	1.68	4.20	8.96	12.59	19.59	25.19	
026	35.72	2.98	1.75	4.37	9.31	13.10	20.37	26.19	3'
027	37.06	3.09	1.81	4.53	9.67	13.60	21.16	27.20	
028	38.40	3.20	1.88	4.70	10.03	14.10	21.94	28.21	
029	39.75	3.31	1.95	4.87	10.39	14.61	22.72	29.22	
030	41.09	3.42	2.01	5.04	10.75	15.11	23.51	30.22	
031	42.43	3.54	2.08	5.21	11.10	15.62	24.29	31.23	
032	43.78	3.65	2.15	5.37	11.46	16.12	25.08	32.24	
033	45.12	3.76	2.22	5.54	11.82	16.62	25.86	33.25	
034	46.46	3.87	2.28	5.71	12.18	17.13	26.64	34.25	
035	47.81	3.98	2.35	5.88	12.54	17.63	27.43	35.26	4'
036	49.15	4.10	2.42	6.04	12.90	18.13	28.21	36.27	
037	50.49	4.21	2.49	6.21	13.25	18.64	28.99	37.28	
038	51.84	4.32	2.55	6.38	13.61	19.14	29.78	38.28	
039	53.18	4.43	2.62	6.55	13.97	19.65	30.56	39.29	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 0.6W	WATTS 1.5W	WATTS 3.2W	WATTS 4.5W	WATTS 7.0W	WATTS 9.0W	NOMINAL LENGTH
040	54.52	4.54	2.69	6.72	14.33	20.15	31.34	40.30	
041	55.87	4.66	2.75	6.88	14.69	20.65	32.13	41.31	
042	57.21	4.77	2.82	7.05	15.05	21.16	32.91	42.31	
043	58.55	4.88	2.89	7.22	15.40	21.66	33.69	43.32	
044	59.90	4.99	2.96	7.39	15.76	22.16	34.48	44.33	5'
045	61.24	5.10	3.02	7.56	16.12	22.67	35.26	45.34	
046	62.58	5.22	3.09	7.72	16.48	23.17	36.05	46.34	
047	63.93	5.33	3.16	7.89	16.84	23.68	36.83	47.35	
048	65.27	5.44	3.22	8.06	17.19	24.18	37.61	48.36	
049	66.61	5.55	3.29	8.23	17.55	24.68	38.40	49.37	
050	67.96	5.66	3.36	8.40	17.91	25.19	39.18	50.37	
051	69.30	5.77	3.43	8.56	18.27	25.69	39.96	51.38	
052	70.64	5.89	3.49	8.73	18.63	26.19	40.75	52.39	
053	71.99	6.00	3.56	8.90	18.99	26.70	41.53	53.40	6'
054	73.33	6.11	3.63	9.07	19.34	27.20	42.31	54.40	
055	74.67	6.22	3.69	9.24	19.70	27.71	43.10	55.41	
056	76.02	6.33	3.76	9.40	20.06	28.21	43.88	56.42	
057	77.36	6.45	3.83	9.57	20.42	28.71	44.66	57.43	
058	78.70	6.56	3.90	9.74	20.78	29.22	45.45	58.43	
059	80.05	6.67	3.96	9.91	21.13	29.72	46.23	59.44	
060	81.39	6.78	4.03	10.07	21.49	30.22	47.02	60.45	
061	82.73	6.89	4.10	10.24	21.85	30.73	47.80	61.46	
062	84.08	7.01	4.16	10.41	22.21	31.23	48.58	62.46	7'
063	85.42	7.12	4.23	10.58	22.57	31.74	49.37	63.47	
064	86.76	7.23	4.30	10.75	22.93	32.24	50.15	64.48	
065	88.11	7.34	4.37	10.91	23.28	32.74	50.93	65.49	
066	89.45	7.45	4.43	11.08	23.64	33.25	51.72	66.49	
067	90.79	7.57	4.50	11.25	24.00	33.75	52.50	67.50	
068	92.13	7.68	4.57	11.42	24.36	34.25	53.28	68.51	
069	93.48	7.79	4.63	11.59	24.72	34.76	54.07	69.52	
070	94.82	7.90	4.70	11.75	25.07	35.26	54.85	70.52	8'

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Length Order Guide (Bottom, Left, Right - Bottom, Left, Right)

Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below.
Total product length received will include added end-prep of choice within a tolerance (± 0.25") - See example (B) below

Example (A)

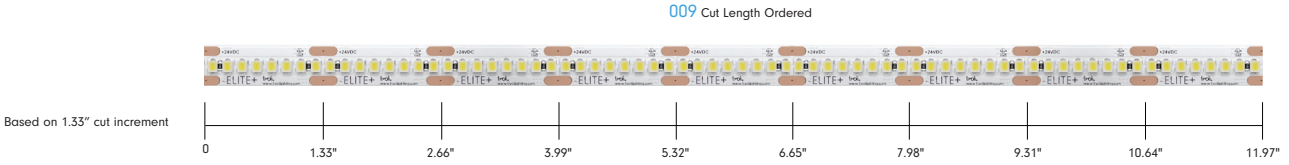

Example (B)

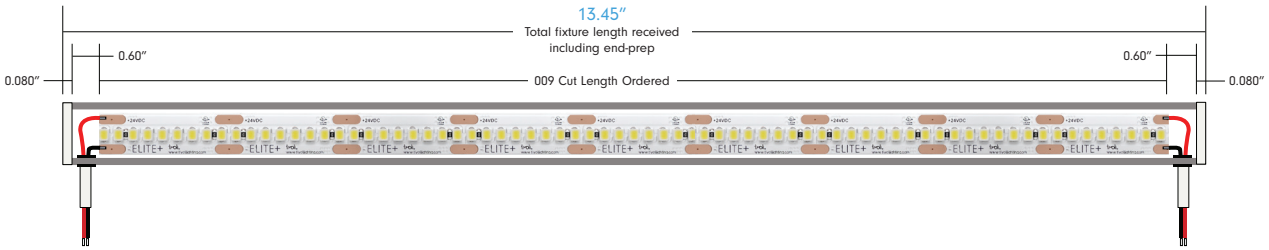

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 0.6W	WATTS 1.5W	WATTS 3.2W	WATTS 4.5W	WATTS 7.0W	WATTS 9.0W	NOMINAL LENGTH
008	12.11	1.01	0.54	1.34	2.87	4.03	6.27	8.06	1'
009	13.45	1.12	0.60	1.51	3.22	4.53	7.05	9.07	
010	14.79	1.23	0.67	1.68	3.58	5.04	7.84	10.07	
011	16.14	1.34	0.74	1.85	3.94	5.54	8.62	11.08	
012	17.48	1.46	0.81	2.02	4.30	6.05	9.40	12.09	
013	18.82	1.57	0.87	2.18	4.66	6.55	10.19	13.10	
014	20.17	1.68	0.94	2.35	5.01	7.05	10.97	14.10	
015	21.51	1.79	1.01	2.52	5.37	7.56	11.75	15.11	
016	22.85	1.90	1.07	2.69	5.73	8.06	12.54	16.12	2'
017	24.20	2.02	1.14	2.85	6.09	8.56	13.32	17.13	
018	25.54	2.13	1.21	3.02	6.45	9.07	14.10	18.13	
019	26.88	2.24	1.28	3.19	6.81	9.57	14.89	19.14	
020	28.23	2.35	1.34	3.36	7.16	10.07	15.67	20.15	
021	29.57	2.46	1.41	3.53	7.52	10.58	16.46	21.16	
022	30.91	2.58	1.48	3.69	7.88	11.08	17.24	22.16	
023	32.26	2.69	1.54	3.86	8.24	11.59	18.02	23.17	
024	33.60	2.80	1.61	4.03	8.60	12.09	18.81	24.18	
025	34.94	2.91	1.68	4.20	8.96	12.59	19.59	25.19	3'
026	36.29	3.02	1.75	4.37	9.31	13.10	20.37	26.19	
027	37.63	3.14	1.81	4.53	9.67	13.60	21.16	27.20	
028	38.97	3.25	1.88	4.70	10.03	14.10	21.94	28.21	
029	40.32	3.36	1.95	4.87	10.39	14.61	22.72	29.22	
030	41.66	3.47	2.01	5.04	10.75	15.11	23.51	30.22	
031	43.00	3.58	2.08	5.21	11.10	15.62	24.29	31.23	
032	44.35	3.70	2.15	5.37	11.46	16.12	25.08	32.24	
033	45.69	3.81	2.22	5.54	11.82	16.62	25.86	33.25	
034	47.03	3.92	2.28	5.71	12.18	17.13	26.64	34.25	4'
035	48.38	4.03	2.35	5.88	12.54	17.63	27.43	35.26	
036	49.72	4.14	2.42	6.04	12.90	18.13	28.21	36.27	
037	51.06	4.26	2.49	6.21	13.25	18.64	28.99	37.28	
038	52.41	4.37	2.55	6.38	13.61	19.14	29.78	38.28	
039	53.75	4.48	2.62	6.55	13.97	19.65	30.56	39.29	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 0.6W	WATTS 1.5W	WATTS 3.2W	WATTS 4.5W	WATTS 7.0W	WATTS 9.0W	NOMINAL LENGTH
040	55.09	4.59	2.69	6.72	14.33	20.15	31.34	40.30	
041	56.44	4.70	2.75	6.88	14.69	20.65	32.13	41.31	
042	57.78	4.81	2.82	7.05	15.05	21.16	32.91	42.31	
043	59.12	4.93	2.89	7.22	15.40	21.66	33.69	43.32	
044	60.47	5.04	2.96	7.39	15.76	22.16	34.48	44.33	5'
045	61.81	5.15	3.02	7.56	16.12	22.67	35.26	45.34	
046	63.15	5.26	3.09	7.72	16.48	23.17	36.05	46.34	
047	64.50	5.37	3.16	7.89	16.84	23.68	36.83	47.35	
048	65.84	5.49	3.22	8.06	17.19	24.18	37.61	48.36	
049	67.18	5.60	3.29	8.23	17.55	24.68	38.40	49.37	
050	68.53	5.71	3.36	8.40	17.91	25.19	39.18	50.37	
051	69.87	5.82	3.43	8.56	18.27	25.69	39.96	51.38	
052	71.21	5.93	3.49	8.73	18.63	26.19	40.75	52.39	
053	72.56	6.05	3.56	8.90	18.99	26.70	41.53	53.40	6'
054	73.90	6.16	3.63	9.07	19.34	27.20	42.31	54.40	
055	75.24	6.27	3.69	9.24	19.70	27.71	43.10	55.41	
056	76.59	6.38	3.76	9.40	20.06	28.21	43.88	56.42	
057	77.93	6.49	3.83	9.57	20.42	28.71	44.66	57.43	
058	79.27	6.61	3.90	9.74	20.78	29.22	45.45	58.43	
059	80.62	6.72	3.96	9.91	21.13	29.72	46.23	59.44	
060	81.96	6.83	4.03	10.07	21.49	30.22	47.02	60.45	
061	83.30	6.94	4.10	10.24	21.85	30.73	47.80	61.46	
062	84.65	7.05	4.16	10.41	22.21	31.23	48.58	62.46	7'
063	85.99	7.17	4.23	10.58	22.57	31.74	49.37	63.47	
064	87.33	7.28	4.30	10.75	22.93	32.24	50.15	64.48	
065	88.68	7.39	4.37	10.91	23.28	32.74	50.93	65.49	
066	90.02	7.50	4.43	11.08	23.64	33.25	51.72	66.49	
067	91.36	7.61	4.50	11.25	24.00	33.75	52.50	67.50	
068	92.70	7.73	4.57	11.42	24.36	34.25	53.28	68.51	
069	94.05	7.84	4.63	11.59	24.72	34.76	54.07	69.52	
070	95.39	7.95	4.70	11.75	25.07	35.26	54.85	70.52	8'

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Length Order Guide (Bottom, Left, Right - Non Apply DED)

Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below.
Total product length received will include added end-prep of choice within a tolerance (± 0.25") - See example (B) below

Example (A)

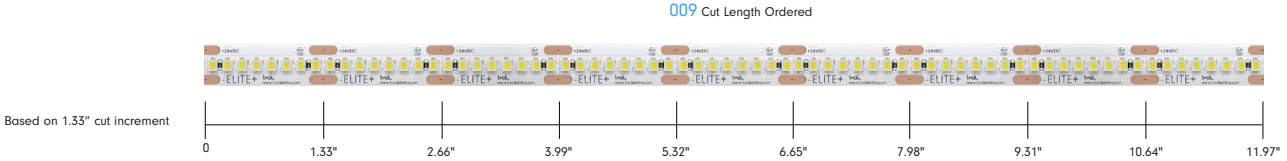

Example (B)

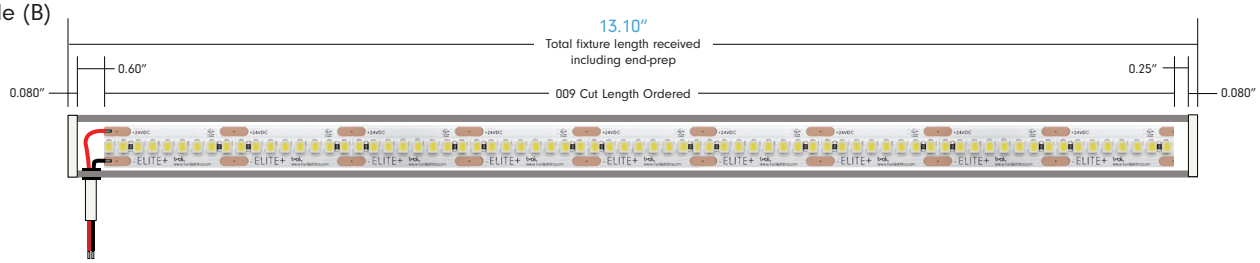

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 0.6W	WATTS 1.5W	WATTS 3.2W	WATTS 4.5W	WATTS 7.0W	WATTS 9.0W	NOMINAL LENGTH
008	11.76	0.98	0.54	1.34	2.87	4.03	6.27	8.06	1'
009	13.10	1.09	0.60	1.51	3.22	4.53	7.05	9.07	
010	14.44	1.20	0.67	1.68	3.58	5.04	7.84	10.07	
011	15.79	1.32	0.74	1.85	3.94	5.54	8.62	11.08	
012	17.13	1.43	0.81	2.02	4.30	6.05	9.40	12.09	
013	18.47	1.54	0.87	2.18	4.66	6.55	10.19	13.10	
014	19.82	1.65	0.94	2.35	5.01	7.05	10.97	14.10	
015	21.16	1.76	1.01	2.52	5.37	7.56	11.75	15.11	
016	22.50	1.88	1.07	2.69	5.73	8.06	12.54	16.12	
017	23.85	1.99	1.14	2.85	6.09	8.56	13.32	17.13	2'
018	25.19	2.10	1.21	3.02	6.45	9.07	14.10	18.13	
019	26.53	2.21	1.28	3.19	6.81	9.57	14.89	19.14	
020	27.88	2.32	1.34	3.36	7.16	10.07	15.67	20.15	
021	29.22	2.43	1.41	3.53	7.52	10.58	16.46	21.16	
022	30.56	2.55	1.48	3.69	7.88	11.08	17.24	22.16	
023	31.91	2.66	1.54	3.86	8.24	11.59	18.02	23.17	
024	33.25	2.77	1.61	4.03	8.60	12.09	18.81	24.18	
025	34.59	2.88	1.68	4.20	8.96	12.59	19.59	25.19	
026	35.94	2.99	1.75	4.37	9.31	13.10	20.37	26.19	3'
027	37.28	3.11	1.81	4.53	9.67	13.60	21.16	27.20	
028	38.62	3.22	1.88	4.70	10.03	14.10	21.94	28.21	
029	39.97	3.33	1.95	4.87	10.39	14.61	22.72	29.22	
030	41.31	3.44	2.01	5.04	10.75	15.11	23.51	30.22	
031	42.65	3.55	2.08	5.21	11.10	15.62	24.29	31.23	
032	44.00	3.67	2.15	5.37	11.46	16.12	25.08	32.24	
033	45.34	3.78	2.22	5.54	11.82	16.62	25.86	33.25	
034	46.68	3.89	2.28	5.71	12.18	17.13	26.64	34.25	
035	48.03	4.00	2.35	5.88	12.54	17.63	27.43	35.26	4'
036	49.37	4.11	2.42	6.04	12.90	18.13	28.21	36.27	
037	50.71	4.23	2.49	6.21	13.25	18.64	28.99	37.28	
038	52.06	4.34	2.55	6.38	13.61	19.14	29.78	38.28	
039	53.40	4.45	2.62	6.55	13.97	19.65	30.56	39.29	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 0.6W	WATTS 1.5W	WATTS 3.2W	WATTS 4.5W	WATTS 7.0W	WATTS 9.0W	NOMINAL LENGTH
040	54.74	4.56	2.69	6.72	14.33	20.15	31.34	40.30	
041	56.09	4.67	2.75	6.88	14.69	20.65	32.13	41.31	
042	57.43	4.79	2.82	7.05	15.05	21.16	32.91	42.31	
043	58.77	4.90	2.89	7.22	15.40	21.66	33.69	43.32	
044	60.12	5.01	2.96	7.39	15.76	22.16	34.48	44.33	5'
045	61.46	5.12	3.02	7.56	16.12	22.67	35.26	45.34	
046	62.80	5.23	3.09	7.72	16.48	23.17	36.05	46.34	
047	64.15	5.35	3.16	7.89	16.84	23.68	36.83	47.35	
048	65.49	5.46	3.22	8.06	17.19	24.18	37.61	48.36	
049	66.83	5.57	3.29	8.23	17.55	24.68	38.40	49.37	
050	68.18	5.68	3.36	8.40	17.91	25.19	39.18	50.37	
051	69.52	5.79	3.43	8.56	18.27	25.69	39.96	51.38	
052	70.86	5.91	3.49	8.73	18.63	26.19	40.75	52.39	
053	72.21	6.02	3.56	8.90	18.99	26.70	41.53	53.40	6'
054	73.55	6.13	3.63	9.07	19.34	27.20	42.31	54.40	
055	74.89	6.24	3.69	9.24	19.70	27.71	43.10	55.41	
056	76.24	6.35	3.76	9.40	20.06	28.21	43.88	56.42	
057	77.58	6.46	3.83	9.57	20.42	28.71	44.66	57.43	
058	78.92	6.58	3.90	9.74	20.78	29.22	45.45	58.43	
059	80.27	6.69	3.96	9.91	21.13	29.72	46.23	59.44	
060	81.61	6.80	4.03	10.07	21.49	30.22	47.02	60.45	
061	82.95	6.91	4.10	10.24	21.85	30.73	47.80	61.46	
062	84.30	7.02	4.16	10.41	22.21	31.23	48.58	62.46	7'
063	85.64	7.14	4.23	10.58	22.57	31.74	49.37	63.47	
064	86.98	7.25	4.30	10.75	22.93	32.24	50.15	64.48	
065	88.33	7.36	4.37	10.91	23.28	32.74	50.93	65.49	
066	89.67	7.47	4.43	11.08	23.64	33.25	51.72	66.49	
067	91.01	7.58	4.50	11.25	24.00	33.75	52.50	67.50	
068	92.35	7.70	4.57	11.42	24.36	34.25	53.28	68.51	
069	93.70	7.81	4.63	11.59	24.72	34.76	54.07	69.52	
070	95.04	7.92	4.70	11.75	25.07	35.26	54.85	70.52	8'

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Mounting Hardware

RIDG-CLP-SLV
Metal mounting clip

UNIV-ADJ-MTBK
Universal Adjustable Mounting Bracket

Glare Control

RIDG-BFL-BLK-1
Ridgeline 1ft Baffle Snap On Black, Kit consists (1)Left (1) Right EC w/ hole, (1)L (1)R EC w/o hole

RIDG-BFL-FTEC-BLK-02
Ridgeline Field-Trim Baffle End Cap Baffle End Cap Black with power feed hole

In-Wall Controls

TVOQ-2-BK
Black

TVOQ-10-XX-7
XX = **BK** (Black), **WH** (White)

LTEC-UB5
5-channel DMX compatible (RGBWY)Touch enabled Multi-scene and zone with App and Bluetooth connectivity

Controls

MDRX-AURA-XX
X = **02, 12, 32** (ports)
MADRIX Aura is a stand-alone controller for up to 2, 12, or 32 universes per unit

SP630E-S
All-In-One SPI/PWM Controller
Note: Control with available BT app or optional SP630E-R remote

Newtwork Accessories

DMX-SPLT-X
X= **2, 4, 8** (Output Channels)
DMX Splitter
1 Input to 8 Output
Ethernet or Hardwire Connection

ARTNET-L-X-512
X = **8** (8 Ports), **16** (Ports)
8 or 16 port universe Artnet to DMX interface, 16 port 8192

NTG-SWI-XXPT
XX = **8** (8 Ports), **16** (16 Ports)
NETGEAR 16-Port gigabit Unmanaged Switch

MDRX-LUNA-XX
X = **04, 08, 16** (ports)
MADRIX Luna 4, 8, 16 port universe Artnet to DMX interface 16 port 8192, 8 port 4096, 4 port 2048 DMX channels

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Power Supplies

MLV / ELV / 0-10V / PWM / TRIAC

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Direct Series Class 2 Transformer	INF-DR-J-96-1-4-24	Indoor / Outdoor	100 - 277V AC	24V DC	1	96W	9W	4A
	INF-DR-J-192-2-4-24				2	2x96W	2x9W	2x4A
	INF-DR-J-288-3-4-24				3	3x96W	3X9W	3x4A

TITLE 24 COMPLIANT

DESCRIPTION	**CAT NO**	**APPLICATION**	**PRIMARY VOLTAGE**	**SECONDARY VOLTAGE**	**CIRCUIT BREAKERS**	**MAX LOAD**	**CIRCUIT CAPACITY**
ER Series Class 2 Driver	ER-80-1-3.3-24-D	Indoor / Outdoor	100-277V AC 5o/60 Hz	24V DC	1	80W	3.3A
ER Series Class 2 0-10V Dimming	ERG-80-24-DIM1-10						

NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-D	Indoor / Damp	100-277V AC 50/60 HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-D				2	2x96W	2x4A
	ADUL-320-3-4-24-D				3	3x96W	3x4A

0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-DOT	Indoor / Damp	100-277V AC 50/60 HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-DOT				2	2x96W	2x4A
	ADUL-320-3-4-24-DOT				3	3x96W	3x4A

DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-DIN	Indoor / Damp	100-277V AC 50/60 HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-DIN				2	2x96W	2x4A
	ADUL-320-3-4-24-DIN				3	3x96W	3x4A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Power Supplies

DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-240-2-4-24-DIN-2	Indoor / Damp	100-277V AC 5o//60 Hz	24V DC	2	2x96W	2x4A
	ADUL-320-3-4-24-DIN-3				3	3x96W	3x4A

DMX/DALI FLICKER-FREE FOR TV STUDIO

DESCRIPTION	**CAT NO**	**APPLICATION**	**PRIMARY VOLTAGE**	**SECONDARY VOLTAGE**	**CIRCUIT BREAKERS**	**MAX LOAD**	**CIRCUIT CAPACITY**
ADNM Series Class 2 Transformer	ADNM-120-1-4-24-DTV	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	1x96W	1x4A
	ADNM-240-2-4-24-DTV				2	2x96W	2x4A
	ADNM-320-3-4-24-DTV				3	3x96W	3x4A

Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)

DIMMING - MLV

DESCRIPTION	**CAT NO**	**APPLICATION**	**INPUT VOLTAGE**	**OUTPUT VOLTAGE**	**MAX LOAD**
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

DIMMING - ELV

DESCRIPTION	**CAT NO**	**APPLICATION**	**INPUT VOLTAGE**	**OUTPUT VOLTAGE**	**MAX LOAD**
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W

Tivoli, LLC. reserves the right to modify this specification without prior notice.