
RIDGELINE

Pre-Built Fixture - Natura



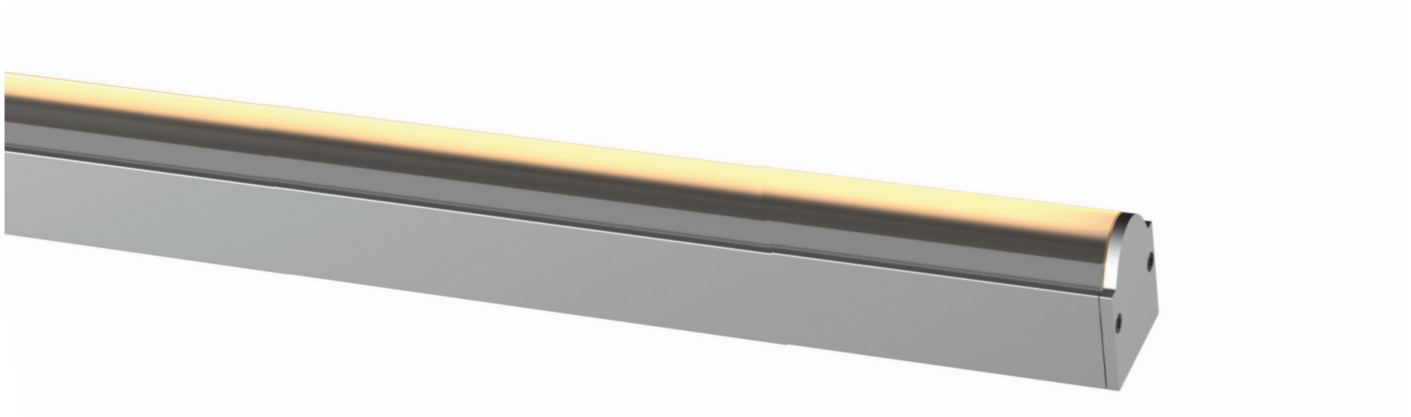


Project: _____ Type: _____


- Available turtle-safe amber 597nm lighting
- Delivered ready to install with integrated light engine, housing, and factory-installed power leads
- Available in fixture lengths from 1 ft to 6.5 ft to accommodate a wide range of architectural applications
- Streamlined ordering and manufacturing processes ensure consistency across all fixture lengths
- MLV, ELV, 0-10V and DMX supported control systems
- Low Voltage 24V DC
- IP54 Indoor rating
- 5 Year Warranty

Dimensions


Metal Clip

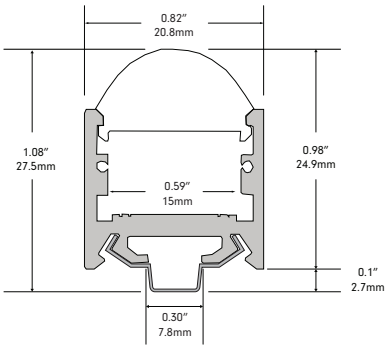


Metal Clip with Baffle

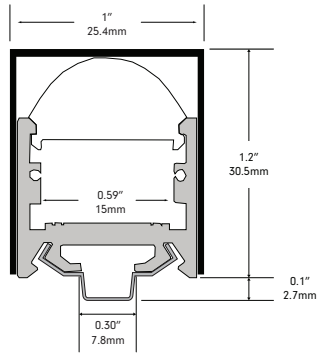

Adjustable Bracket

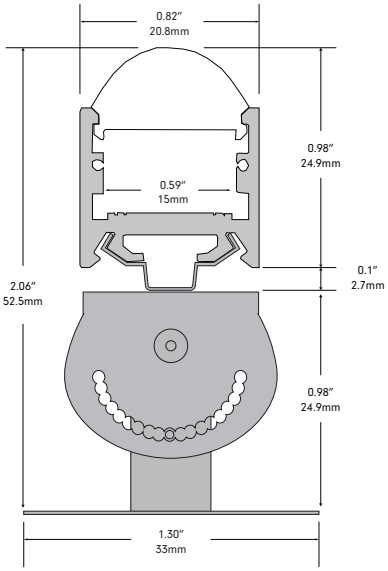

Adjustable Bracket with Baffle

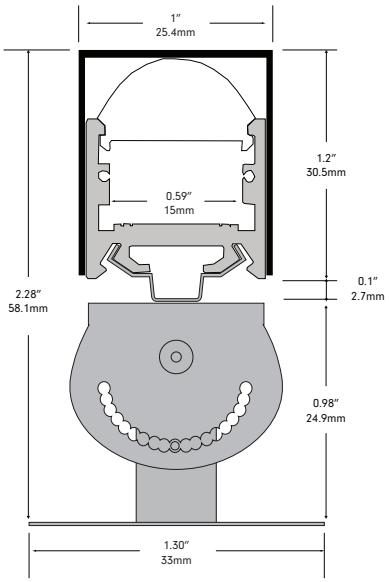

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 10/23/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Specification

PRODUCT CODE	INTENSITY	LOCATION	CCT	FINISH	LENS	FIRST POWER LEAD	FIRST POSITION TYPE	SECOND POWER LEAD	SECOND POSITION TYPE	MOUNTING	LENGTH
RIDG		I	AM								
RIDG = Ridgeline	**NTL** = Natura Low Brightiness **NTS** = Natura Standard Brightiness **NTH** = Natura High Output **NTV** = Natura Very High Output	**I** = Indoor	**AM** = Amber	**SL** = Silver **BK** = Black **WH** = White	**10** = 10 degree **30** = 30 degree	**B2B24** = 24" 2 Bare Wire Power Lead, Black **B2W24** = 24" 2 Bare Wire Power Lead, White **P2W24** = 24" 2 Plenum Rated Bare Wire Power Lead, White **CB06** = 6" DC FEMALE Barrel Power Lead, Black, Indoor **CW06** = 6" DC FEMALE Barrel Power Lead, White, Indoor	**F** = Front **B** = Bottom **L** = Left **R** = Right	**B2B24** = 24" 2 Bare Wire Power Lead, Black **B2W24** = 24" 2 Bare Wire Power Lead, White **P2W24** = 24" 2 Plenum Rated Bare Wire Power Lead, White **CB06** = 6" DC MALE Barrel Power Lead, Black, Indoor **CW06** = 6" DC MALE Barrel Power Lead, White, Indoor **DED** = Dead End	**F** = Front **B** = Bottom **L** = Left **R** = Right **N** = Non Apply	**C** = Clip **J** = Adjustable	**See Chart**

Specification - 10° Lens (no baffle)

LB Low Brightness	
Color	Amber
Lumens/ft	CF
Efficacy (Lm/W)	CF
Wavelength	597
Listed Power W/ft.	1.5
Max Run	58'

SB Standard Brightness	
Color	Amber
Lumens/ft	CF
Efficacy (Lm/W)	CF
Wavelength	597
Listed Power W/ft.	3
Max Run	30'

HO High Output	
Color	Amber
Lumens/ft	CF
Efficacy (Lm/W)	CF
Wavelength	597
Listed Power W/ft.	4.5
Max Run	20'

VHO Very High Output	
Color	Amber
Lumens/ft	CF
Efficacy (Lm/W)	CF
Wavelength	597
Listed Power W/ft.	7
Max Run	13'

Specification - 30° Lens (no baffle)

LB Low Brightness	
Color	Amber
Lumens/ft	CF
Efficacy (Lm/W)	CF
Wavelength	597
Listed Power W/ft.	1.5
Max Run	58'

SB Standard Brightness	
Color	Amber
Lumens/ft	CF
Efficacy (Lm/W)	CF
Wavelength	597
Listed Power W/ft.	3
Max Run	30'

HO High Output	
Color	Amber
Lumens/ft	CF
Efficacy (Lm/W)	CF
Wavelength	597
Listed Power W/ft.	4.5
Max Run	20'

VHO Very High Output	
Color	Amber
Lumens/ft	CF
Efficacy (Lm/W)	CF
Wavelength	597
Listed Power W/ft.	7
Max Run	13'

Specification - 10° Lens (with baffle)

LB Low Brightness	
Color	Amber
Lumens/ft	CF
Efficacy (Lm/W)	CF
Wavelength	597
Listed Power W/ft.	1.5
Max Run	58'

SB Standard Brightness	
Color	Amber
Lumens/ft	CF
Efficacy (Lm/W)	CF
Wavelength	597
Listed Power W/ft.	3
Max Run	30'

HO High Output	
Color	Amber
Lumens/ft	CF
Efficacy (Lm/W)	CF
Wavelength	597
Listed Power W/ft.	4.5
Max Run	20'

VHO Very High Output	
Color	Amber
Lumens/ft	CF
Efficacy (Lm/W)	CF
Wavelength	597
Listed Power W/ft.	7
Max Run	13'

Specification - 30° Lens (with baffle)

LB Low Brightness	
Color	Amber
Lumens/ft	CF
Efficacy (Lm/W)	CF
Wavelength	597
Listed Power W/ft.	1.5
Max Run	58'

SB Standard Brightness	
Color	Amber
Lumens/ft	CF
Efficacy (Lm/W)	CF
Wavelength	597
Listed Power W/ft.	3
Max Run	30'

HO High Output	
Color	Amber
Lumens/ft	CF
Efficacy (Lm/W)	CF
Wavelength	597
Listed Power W/ft.	4.5
Max Run	20'

VHO Very High Output	
Color	Amber
Lumens/ft	CF
Efficacy (Lm/W)	CF
Wavelength	597
Listed Power W/ft.	7
Max Run	13'

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 10/23/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Overall Specification

Electrical	
Input Voltage	24V
Dimming	MLV/ELV/0-10V/DMX
Physical	
Operating Temperature	-40°F (-40°C) ~ +140°F (+60°C)

Certification and Testing	
Certification	UL Listed, CE
Lumen Maintenance (L70)	60,000 hrs
Environment	IP54
Location	Indoor Dry
Warranty	5 years


Tivoli, LLC. reserves the right to modify this specification without prior notice.

Length Order Guide (Front - Front)


Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below.
Total product length received will include added end-prep of choice within a tolerance (± 0.25") - See example (B) below

Example (A)

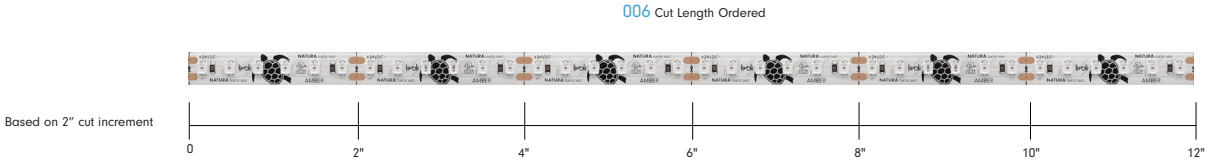

Example (B)

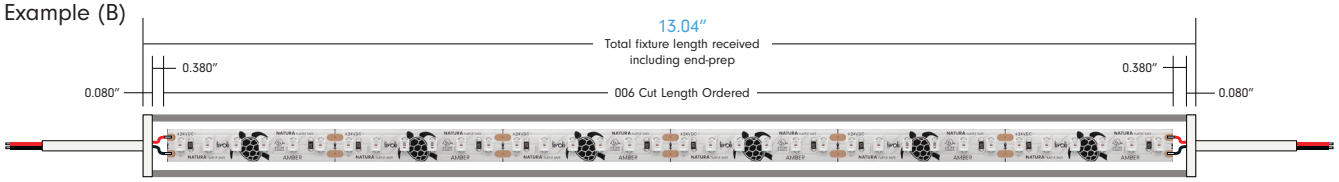

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	WATTS 7.0W	NOMINAL LENGTH
006	13.04	1.09	1.52	3.03	4.55	7.07	1'
007	15.06	1.26	1.77	3.54	5.30	8.25	
008	17.08	1.42	2.02	4.04	6.06	9.43	
009	19.10	1.59	2.27	4.55	6.82	10.61	
010	21.12	1.76	2.53	5.05	7.58	11.78	
011	23.14	1.93	2.78	5.56	8.33	12.96	
012	25.16	2.10	3.03	6.06	9.09	14.14	2'
013	27.18	2.27	3.28	6.57	9.85	15.32	
014	29.20	2.43	3.54	7.07	10.61	16.50	
015	31.22	2.60	3.79	7.58	11.36	17.68	
016	33.24	2.77	4.04	8.08	12.12	18.85	
017	35.26	2.94	4.29	8.59	12.88	20.03	
018	37.28	3.11	4.55	9.09	13.64	21.21	3'
019	39.30	3.28	4.80	9.60	14.39	22.39	
020	41.32	3.44	5.05	10.10	15.15	23.57	
021	43.34	3.61	5.30	10.61	15.91	24.75	
022	45.36	3.78	5.56	11.11	16.67	25.92	
023	47.38	3.95	5.81	11.62	17.42	27.10	
024	49.40	4.12	6.06	12.12	18.18	28.28	4'
025	51.42	4.29	6.31	12.63	18.94	29.46	
026	53.44	4.45	6.57	13.13	19.70	30.64	
027	55.46	4.62	6.82	13.64	20.45	31.82	
028	57.48	4.79	7.07	14.14	21.21	32.99	
029	59.50	4.96	7.32	14.65	21.97	34.17	
030	61.52	5.13	7.58	15.15	22.73	35.35	5'
031	63.54	5.30	7.83	15.66	23.48	36.53	
032	65.56	5.46	8.08	16.16	24.24	37.71	
033	67.58	5.63	8.33	16.67	25.00	38.89	
034	69.60	5.80	8.59	17.17	25.76	40.06	
035	71.62	5.97	8.84	17.68	26.51	41.24	
036	73.64	6.14	9.09	18.18	27.27	42.42	6'
037	75.66	6.31	9.34	18.69	28.03	43.60	
038	77.68	6.47	9.60	19.19	28.79	44.78	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	WATTS 7.0W	NOMINAL LENGTH
039	79.70	6.64	9.85	19.70	29.54	45.96	
040	81.72	6.81	10.10	20.20	30.30	47.13	
041	83.74	6.98	10.35	20.71	31.06	48.31	7'
042	85.76	7.15	10.61	21.21	31.82	49.49	
043	87.78	7.32	10.86	21.72	32.57	50.67	
044	89.80	7.48	11.11	22.22	33.33	51.85	
045	91.82	7.65	11.36	22.73	34.09	53.03	
046	93.84	7.82	11.62	23.23	34.85	54.20	
047	95.86	7.99	11.87	23.74	35.60	55.38	8'


Tivoli, LLC. reserves the right to modify this specification without prior notice.

Length Order Guide (Front - Non Apply DED)


Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below.
Total product length received will include added end-prep of choice within a tolerance (± 0.25") - See example (B) below

Example (A)

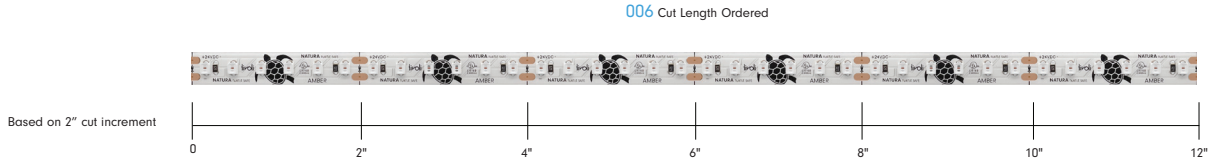

Example (B)

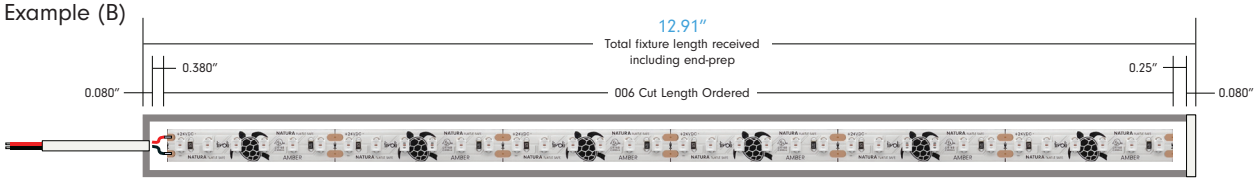

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	WATTS 7.0W	NOMINAL LENGTH
006	12.91	1.08	1.52	3.03	4.55	7.07	1'
007	14.93	1.24	1.77	3.54	5.30	8.25	
008	16.95	1.41	2.02	4.04	6.06	9.43	
009	18.97	1.58	2.27	4.55	6.82	10.61	
010	20.99	1.75	2.53	5.05	7.58	11.78	
011	23.01	1.92	2.78	5.56	8.33	12.96	
012	25.03	2.09	3.03	6.06	9.09	14.14	2'
013	27.05	2.25	3.28	6.57	9.85	15.32	
014	29.07	2.42	3.54	7.07	10.61	16.50	
015	31.09	2.59	3.79	7.58	11.36	17.68	
016	33.11	2.76	4.04	8.08	12.12	18.85	
017	35.13	2.93	4.29	8.59	12.88	20.03	
018	37.15	3.10	4.55	9.09	13.64	21.21	3'
019	39.17	3.26	4.80	9.60	14.39	22.39	
020	41.19	3.43	5.05	10.10	15.15	23.57	
021	43.21	3.60	5.30	10.61	15.91	24.75	
022	45.23	3.77	5.56	11.11	16.67	25.92	
023	47.25	3.94	5.81	11.62	17.42	27.10	
024	49.27	4.11	6.06	12.12	18.18	28.28	4'
025	51.29	4.27	6.31	12.63	18.94	29.46	
026	53.31	4.44	6.57	13.13	19.70	30.64	
027	55.33	4.61	6.82	13.64	20.45	31.82	
028	57.35	4.78	7.07	14.14	21.21	32.99	
029	59.37	4.95	7.32	14.65	21.97	34.17	
030	61.39	5.12	7.58	15.15	22.73	35.35	5'
031	63.41	5.28	7.83	15.66	23.48	36.53	
032	65.43	5.45	8.08	16.16	24.24	37.71	
033	67.45	5.62	8.33	16.67	25.00	38.89	
034	69.47	5.79	8.59	17.17	25.76	40.06	
035	71.49	5.96	8.84	17.68	26.51	41.24	
036	73.51	6.13	9.09	18.18	27.27	42.42	6'
037	75.53	6.29	9.34	18.69	28.03	43.60	
038	77.55	6.46	9.60	19.19	28.79	44.78	6.5'

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	WATTS 7.0W	NOMINAL LENGTH
039	79.57	6.63	9.85	19.70	29.54	45.96	
040	81.59	6.80	10.10	20.20	30.30	47.13	
041	83.61	6.97	10.35	20.71	31.06	48.31	7'
042	85.63	7.14	10.61	21.21	31.82	49.49	
043	87.65	7.30	10.86	21.72	32.57	50.67	
044	89.67	7.47	11.11	22.22	33.33	51.85	
045	91.69	7.64	11.36	22.73	34.09	53.03	
046	93.71	7.81	11.62	23.23	34.85	54.20	
047	95.73	7.98	11.87	23.74	35.60	55.38	8'


Tivoli, LLC. reserves the right to modify this specification without prior notice.

Length Order Guide (Front - Bottom, Left, Right **or** Bottom, Left, Right - Front)


Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below.
Total product length received will include added end-prep of choice within a tolerance (± 0.25") - See example (B) below

Example (A)

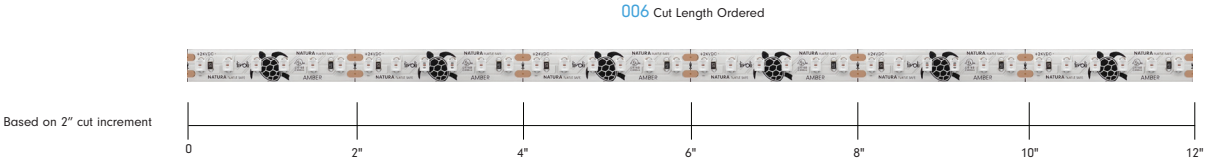

Example (B)

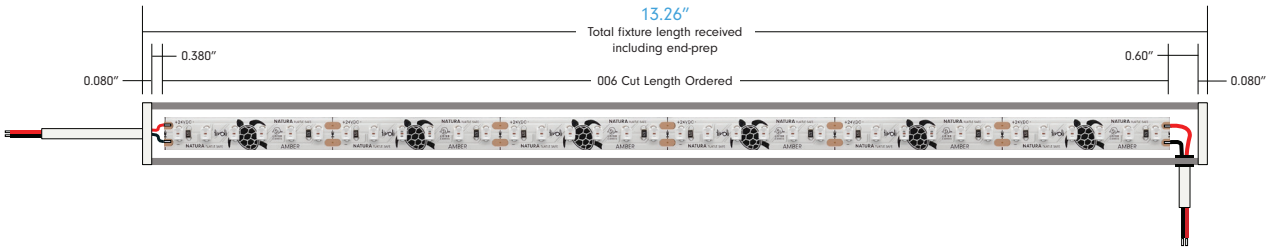

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	WATTS 7.0W	NOMINAL LENGTH
006	13.26	1.11	1.52	3.03	4.55	7.07	1'
007	15.28	1.27	1.77	3.54	5.30	8.25	
008	17.30	1.44	2.02	4.04	6.06	9.43	
009	19.32	1.61	2.27	4.55	6.82	10.61	
010	21.34	1.78	2.53	5.05	7.58	11.78	
011	23.36	1.95	2.78	5.56	8.33	12.96	2'
012	25.38	2.12	3.03	6.06	9.09	14.14	
013	27.40	2.28	3.28	6.57	9.85	15.32	
014	29.42	2.45	3.54	7.07	10.61	16.50	
015	31.44	2.62	3.79	7.58	11.36	17.68	
016	33.46	2.79	4.04	8.08	12.12	18.85	
017	35.48	2.96	4.29	8.59	12.88	20.03	3'
018	37.50	3.13	4.55	9.09	13.64	21.21	
019	39.52	3.29	4.80	9.60	14.39	22.39	
020	41.54	3.46	5.05	10.10	15.15	23.57	
021	43.56	3.63	5.30	10.61	15.91	24.75	
022	45.58	3.80	5.56	11.11	16.67	25.92	
023	47.60	3.97	5.81	11.62	17.42	27.10	4'
024	49.62	4.14	6.06	12.12	18.18	28.28	
025	51.64	4.30	6.31	12.63	18.94	29.46	
026	53.66	4.47	6.57	13.13	19.70	30.64	
027	55.68	4.64	6.82	13.64	20.45	31.82	
028	57.70	4.81	7.07	14.14	21.21	32.99	
029	59.72	4.98	7.32	14.65	21.97	34.17	5'
030	61.74	5.15	7.58	15.15	22.73	35.35	
031	63.76	5.31	7.83	15.66	23.48	36.53	
032	65.78	5.48	8.08	16.16	24.24	37.71	
033	67.80	5.65	8.33	16.67	25.00	38.89	
034	69.82	5.82	8.59	17.17	25.76	40.06	
035	71.84	5.99	8.84	17.68	26.51	41.24	6'
036	73.86	6.16	9.09	18.18	27.27	42.42	
037	75.88	6.32	9.34	18.69	28.03	43.60	
038	77.90	6.49	9.60	19.19	28.79	44.78	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	WATTS 7.0W	NOMINAL LENGTH
039	79.92	6.66	9.85	19.70	29.54	45.96	
040	81.94	6.83	10.10	20.20	30.30	47.13	
041	83.96	7.00	10.35	20.71	31.06	48.31	7'
042	85.98	7.17	10.61	21.21	31.82	49.49	
043	88.00	7.33	10.86	21.72	32.57	50.67	
044	90.02	7.50	11.11	22.22	33.33	51.85	
045	92.04	7.67	11.36	22.73	34.09	53.03	
046	94.06	7.84	11.62	23.23	34.85	54.20	8'


Tivoli, LLC. reserves the right to modify this specification without prior notice.

Length Order Guide (Bottom, Left, Right - Bottom, Left, Right)


Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below.
Total product length received will include added end-prep of choice within a tolerance (± 0.25") - See example (B) below

Example (A)

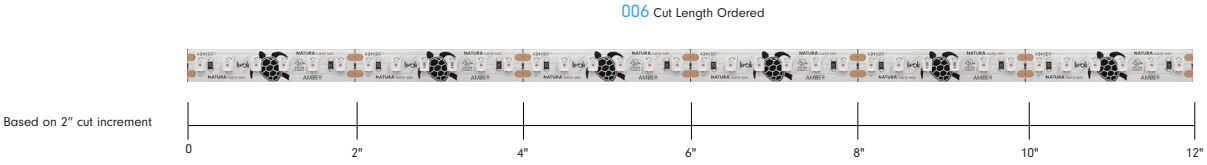

Example (B)

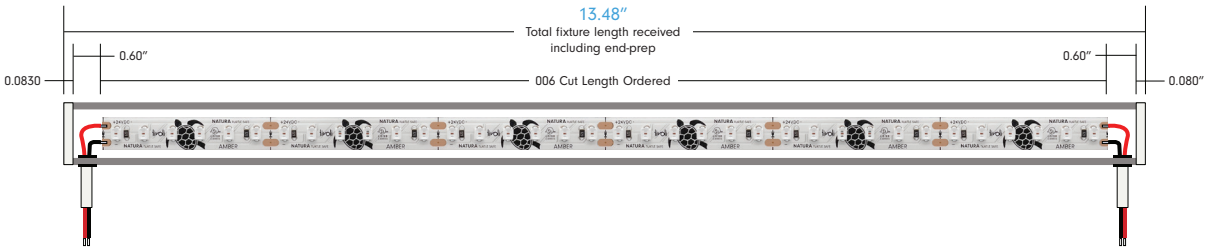

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	WATTS 7.0W	NOMINAL LENGTH
006	13.48	1.12	1.52	3.03	4.55	7.07	1'
007	15.50	1.29	1.77	3.54	5.30	8.25	
008	17.52	1.46	2.02	4.04	6.06	9.43	
009	19.54	1.63	2.27	4.55	6.82	10.61	
010	21.56	1.80	2.53	5.05	7.58	11.78	
011	23.58	1.97	2.78	5.56	8.33	12.96	2'
012	25.60	2.13	3.03	6.06	9.09	14.14	
013	27.62	2.30	3.28	6.57	9.85	15.32	
014	29.64	2.47	3.54	7.07	10.61	16.50	
015	31.66	2.64	3.79	7.58	11.36	17.68	
016	33.68	2.81	4.04	8.08	12.12	18.85	
017	35.70	2.98	4.29	8.59	12.88	20.03	3'
018	37.72	3.14	4.55	9.09	13.64	21.21	
019	39.74	3.31	4.80	9.60	14.39	22.39	
020	41.76	3.48	5.05	10.10	15.15	23.57	
021	43.78	3.65	5.30	10.61	15.91	24.75	
022	45.80	3.82	5.56	11.11	16.67	25.92	
023	47.82	3.99	5.81	11.62	17.42	27.10	4'
024	49.84	4.15	6.06	12.12	18.18	28.28	
025	51.86	4.32	6.31	12.63	18.94	29.46	
026	53.88	4.49	6.57	13.13	19.70	30.64	
027	55.90	4.66	6.82	13.64	20.45	31.82	
028	57.92	4.83	7.07	14.14	21.21	32.99	
029	59.94	5.00	7.32	14.65	21.97	34.17	5'
030	61.96	5.16	7.58	15.15	22.73	35.35	
031	63.98	5.33	7.83	15.66	23.48	36.53	
032	66.00	5.50	8.08	16.16	24.24	37.71	
033	68.02	5.67	8.33	16.67	25.00	38.89	
034	70.04	5.84	8.59	17.17	25.76	40.06	
035	72.06	6.01	8.84	17.68	26.51	41.24	6'
036	74.08	6.17	9.09	18.18	27.27	42.42	
037	76.10	6.34	9.34	18.69	28.03	43.60	
038	78.13	6.51	9.60	19.19	28.79	44.78	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	WATTS 7.0W	NOMINAL LENGTH
039	80.14	6.68	9.85	19.70	29.54	45.96	
040	82.16	6.85	10.10	20.20	30.30	47.13	
041	84.18	7.02	10.35	20.71	31.06	48.31	7'
042	86.20	7.18	10.61	21.21	31.82	49.49	
043	88.22	7.35	10.86	21.72	32.57	50.67	
044	90.24	7.52	11.11	22.22	33.33	51.85	
045	92.26	7.69	11.36	22.73	34.09	53.03	
046	94.28	7.86	11.62	23.23	34.85	54.20	8'


Tivoli, LLC. reserves the right to modify this specification without prior notice.

Length Order Guide (Bottom, Left, Right - Non Apply DED)


Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below.
Total product length received will include added end-prep of choice within a tolerance (± 0.25") - See example (B) below

Example (A)

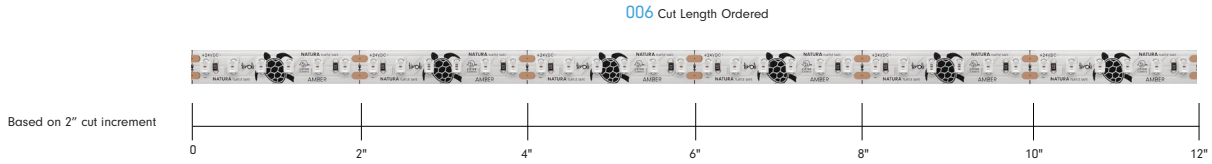

Example (B)

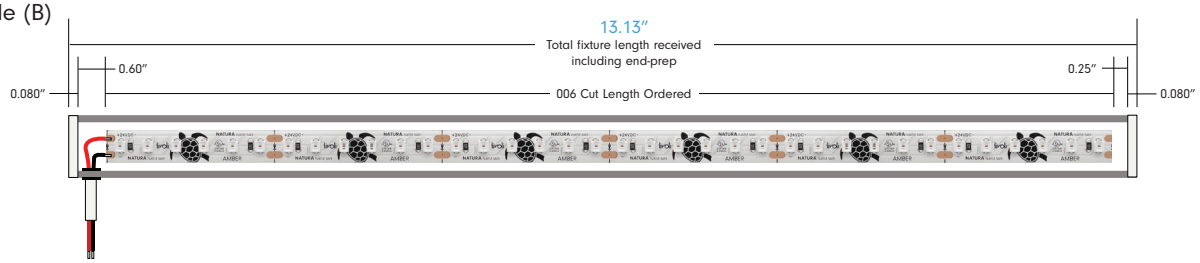

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	WATTS 7.0W	NOMINAL LENGTH
006	13.13	1.09	1.52	3.03	4.55	7.07	1'
007	15.15	1.26	1.77	3.54	5.30	8.25	
008	17.17	1.43	2.02	4.04	6.06	9.43	
009	19.19	1.60	2.27	4.55	6.82	10.61	
010	21.21	1.77	2.53	5.05	7.58	11.78	
011	23.23	1.94	2.78	5.56	8.33	12.96	
012	25.25	2.10	3.03	6.06	9.09	14.14	2'
013	27.27	2.27	3.28	6.57	9.85	15.32	
014	29.29	2.44	3.54	7.07	10.61	16.50	
015	31.31	2.61	3.79	7.58	11.36	17.68	
016	33.33	2.78	4.04	8.08	12.12	18.85	
017	35.35	2.95	4.29	8.59	12.88	20.03	
018	37.37	3.11	4.55	9.09	13.64	21.21	3'
019	39.39	3.28	4.80	9.60	14.39	22.39	
020	41.41	3.45	5.05	10.10	15.15	23.57	
021	43.43	3.62	5.30	10.61	15.91	24.75	
022	45.45	3.79	5.56	11.11	16.67	25.92	
023	47.47	3.96	5.81	11.62	17.42	27.10	
024	49.49	4.12	6.06	12.12	18.18	28.28	4'
025	51.51	4.29	6.31	12.63	18.94	29.46	
026	53.53	4.46	6.57	13.13	19.70	30.64	
027	55.55	4.63	6.82	13.64	20.45	31.82	
028	57.57	4.80	7.07	14.14	21.21	32.99	
029	59.59	4.97	7.32	14.65	21.97	34.17	
030	61.61	5.13	7.58	15.15	22.73	35.35	5'
031	63.63	5.30	7.83	15.66	23.48	36.53	
032	65.65	5.47	8.08	16.16	24.24	37.71	
033	67.67	5.64	8.33	16.67	25.00	38.89	
034	69.69	5.81	8.59	17.17	25.76	40.06	
035	71.71	5.98	8.84	17.68	26.51	41.24	
036	73.73	6.14	9.09	18.18	27.27	42.42	6'
037	75.75	6.31	9.34	18.69	28.03	43.60	
038	77.77	6.48	9.60	19.19	28.79	44.78	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 1.5W	WATTS 3.0W	WATTS 4.5W	WATTS 7.0W	NOMINAL LENGTH
039	79.79	6.65	9.85	19.70	29.54	45.96	
040	81.81	6.82	10.10	20.20	30.30	47.13	
041	83.83	6.99	10.35	20.71	31.06	48.31	7'
042	85.85	7.15	10.61	21.21	31.82	49.49	
043	87.87	7.32	10.86	21.72	32.57	50.67	
044	89.89	7.49	11.11	22.22	33.33	51.85	
045	91.91	7.66	11.36	22.73	34.09	53.03	
046	93.93	7.83	11.62	23.23	34.85	54.20	
047	95.95	8.00	11.87	23.74	35.60	55.38	8'

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Replacment Mounting Hardware



RIDG-CLP-SLV
Metal mounting clip



RIDG-ADJ-MTBK
Ridgeline Adjustable Mounting Bracket, includes mounting clip

Glare Control



RIDG-BFL-BLK-1
Ridgeline 1ft Baffle Snap On Black, Kit consists (1)Left (1) Right EC w/ hole, (1)L (1)R EC w/o hole



RIDG-BFL-FTEC-BLK-02
Ridgeline Field-Trim Baffle End Cap Baffle End Cap Black with power feed hole

In-Wall Controls



TVOQ-2-BK
Black



TVOQ-10-XX-7
XX = **BK** (Black), **WH** (White)



LTEC-UB5
5-channel DMX compatible (RGBWY)Touch enabled Multi-scene and zone with App and Bluetooth connectivity

Controls



MDRX-AURA-XX
X = **02, 12, 32** (ports)
MADRIX Aura is a stand-alone controller for up to 2, 12, or 32 universes per unit



SP630E-S
All-In-One SPI/PWM Controller
Note: Control with available BT app or optional SP630E-R remote

Newtwork Accessories



DMX-SPLT-X
X= **2, 4, 8** (Output Channels)
DMX Splitter
1 Input to 8 Output
Ethernet or Hardwire Connection



ARTNET-L-X-512
X = **8** (8 Ports), **16** (Ports)
8 or 16 port universe Artnet to DMX interface, 16 port 8192



NTG-SWI-XXPT
XX = **8** (8 Ports), **16** (16 Ports)
NETGEAR 16-Port gigabit Unmanaged Switch



MDRX-LUNA-XX
X = **04, 08, 16** (ports)
MADRIX Luna 4, 8, 16 port universe Artnet to DMX interface 16 port 8192, 8 port 4096, 4 port 2048 DMX channels

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Power Supplies

MLV / ELV / 0-10V / PWM / TRIAC

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Direct Series Class 2 Transformer	INF-DR-J-30-1-1.3-24	Indoor / Outdoor	100 - 277V AC	24V DC	1	30W	6W	1.3A
	INF-DR-J-60-1-2.5-24				1	60W	12W	2.5A
	INF-DR-J-96-1-4-24				1	96W	19.2W	4A
	INF-DR-J-192-2-4-24				2	2x96W	2x28.8W	2x4A
	INF-DR-J-288-3-4-24				3	3x96W	3X43.2W	3x4A

TITLE 24 COMPLIANT

DESCRIPTION	**CAT NO**	**APPLICATION**	**PRIMARY VOLTAGE**	**SECONDARY VOLTAGE**	**CIRCUIT BREAKERS**	**MAX LOAD**	**CIRCUIT CAPACITY**
ER Series Class 2 Driver	ER-80-1-3.3-24-D	Indoor / Outdoor	100-277V AC 5o//60 Hz	24V DC	1	80W	3.3A
ER Series Class 2 0-10V Dimming	ERG-80-24-DIM1-10						

NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-D	Indoor / Damp	100-277V AC 50/60 HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-D				2	2x96W	2x4A
	ADUL-320-3-4-24-D				3	3x96W	3x4A

0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-DOT	Indoor / Damp	100-277V AC 50/60 HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-DOT				2	2x96W	2x4A
	ADUL-320-3-4-24-DOT				3	3x96W	3x4A

DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-DIN	Indoor / Damp	100-277V AC 50/60 HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-DIN				2	2x96W	2x4A
	ADUL-320-3-4-24-DIN				3	3x96W	3x4A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 10/23/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Power Supplies

DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-240-2-4-24-DIN-2	Indoor / Damp	100-277V AC 5o//60 Hz	24V DC	2	2x96W	2x4A
	ADUL-320-3-4-24-DIN-3				3	3x96W	3x4A

DMX/DALI FLICKER-FREE FOR TV STUDIO

DESCRIPTION	**CAT NO**	**APPLICATION**	**PRIMARY VOLTAGE**	**SECONDARY VOLTAGE**	**CIRCUIT BREAKERS**	**MAX LOAD**	**CIRCUIT CAPACITY**
ADNM Series Class 2 Transformer	ADNM-120-1-4-24-DTV	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	1x96W	1x4A
	ADNM-240-2-4-24-DTV				2	2x96W	2x4A
	ADNM-320-3-4-24-DTV				3	3x96W	3x4A

Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)

DIMMING - MLV

DESCRIPTION	**CAT NO**	**APPLICATION**	**INPUT VOLTAGE**	**OUTPUT VOLTAGE**	**MAX LOAD**
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

DIMMING - ELV

DESCRIPTION	**CAT NO**	**APPLICATION**	**INPUT VOLTAGE**	**OUTPUT VOLTAGE**	**MAX LOAD**
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W

Tivoli, LLC. reserves the right to modify this specification without prior notice.