
ANZIO

Pre-Built Fixture - RGB




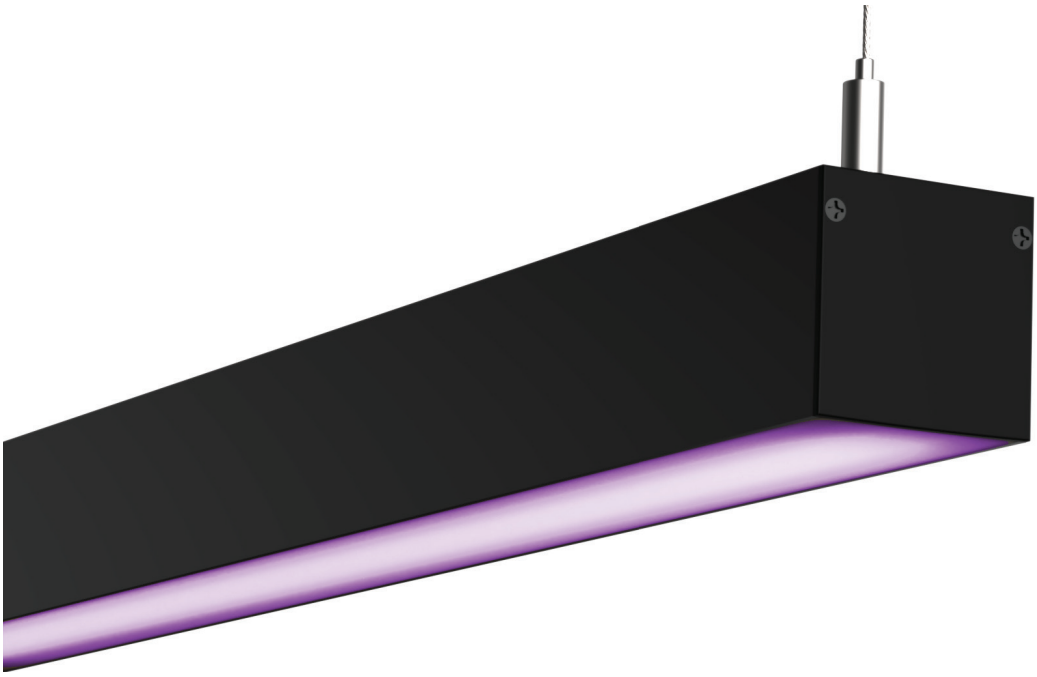

Project: _____ Type: _____

- Suspension fixture with 41" field-adjustable cable.
- Over 60 million color-changing combinations.
- Delivered ready to install with integrated light engine, housing, and factory-installed power leads.
- Available in fixture lengths from 1 ft to 6.5 ft to accommodate a wide range of architectural applications.
- Optimized optical design provides smooth, uniform color blending with no visible color separation.
- Precision manufacturing ordering chart uniforms process and consistency across all fixture lengths.
- Compatible with DMX and other supported lighting control systems for dynamic scenes, color tuning, and automation.
- Low Voltage 24V DC
- IP54 Rating
- 5 Year Warranty

Dimensions

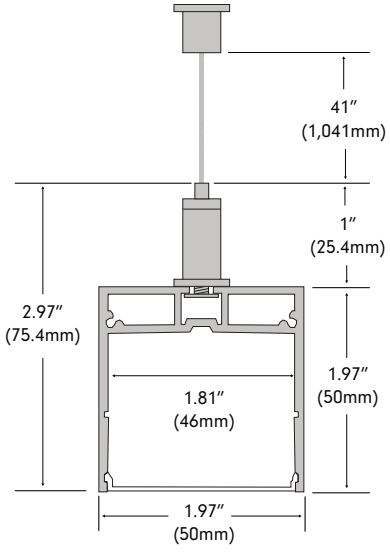

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Specification

PRODUCT CODE	LIGHT SOURCE	LOCATION	COLOR/CCT	FINISH	LENS	FIRST POWER LEAD	FIRST POSITION TYPE	SECOND POWER LEAD	SECOND POSITION TYPE	MOUNTING	LENGTH
ANZI	**FUS**	**I**	**RGB**				**B**	**DED**	**N**	**S**	
ANZI = Anzio	**FUS** = FuseTape	**I** = Indoor	**RGB** = Red, Green, Blue mixing	**SL** = Silver **WH** = White **ABK** = Anodied Black	**OP** = Opal **CL** = Clear **DF** = Deffused **SL** = Silicone	**B5B48** = 48" 4 Bare Wire Power Lead, Black **B5W48** = 48" 4 Bare Wire Power Lead, White	**B** = Bottom	**DED** = Dead End	**N** = Non-Apply	**S** = Suspension	**See Chart**

Specification - Lens Type

Output - Clear Lens				
Kelvin Temperature	Red	Green	Blue	RGB
Lumens/ft	102.1	308.76	82.58	472.44
Efficacy (Lm/W)	n/a	n/a	n/a	n/a
CRI	n/a	n/a	n/a	58
Wavelength	629	523	470	n/a
Measured Power W/ft	2.8	3.8	3.4	10.6
Listed Power W/ft.	8.8			
Max Run	10.5'			

Output - Silicone Lens				
Kelvin Temperature	Red	Green	Blue	RGB
Lumens/ft	85.64	258.96	69.26	396.24
Efficacy (Lm/W)	n/a	n/a	n/a	n/a
CRI	n/a	n/a	n/a	58
Wavelength	629	523	470	n/a
Measured Power W/ft	2.8	3.8	3.4	10.6
Listed Power W/ft.	8.8			
Max Run	10.5'			

Output - Diffused Lens				
Kelvin Temperature	Red	Green	Blue	RGB
Lumens/ft	85.54	255.64	68.37	391.16
Efficacy (Lm/W)	n/a	n/a	n/a	n/a
CRI	n/a	n/a	n/a	58
Wavelength	629	523	470	n/a
Measured Power W/ft	2.8	3.8	3.4	10.6
Listed Power W/ft.	8.8			
Max Run	10.5'			

Output - Opal Lens				
Kelvin Temperature	Red	Green	Blue	RGB
Lumens/ft	70.27	212.48	56.83	325.12
Efficacy (Lm/W)	n/a	n/a	n/a	n/a
CRI	n/a	n/a	n/a	58
Wavelength	629	523	470	n/a
Measured Power W/ft	2.8	3.8	3.4	10.6
Listed Power W/ft.	8.8			
Max Run	10.5'			

n/a = Not Applicable
CF = Call Factory for updated data

Overall Specification

Electrical	
Input Voltage	24V DC
Control System	DMX
Physical	
LED	3535 (RGB)
Operating Temperature	-40°C to 60°C (-40°F to 140°F)

Certification and Testing	
Certification	cULus
Environment	Damp Location
IP Rating	IP54
Warranty	5 years

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 10/06/26


www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Length Order Guide (Bottom - DED/End Cap)


Note: Use "**Cut Increment**" number for order enty information (see chart below)

Order information is based on total amount of cut incrments needed within a single run - See example (A) below.
Total product length received will include added end-prep of choice within a tolerance (± 0.25") - See example (B) below

Example (A)

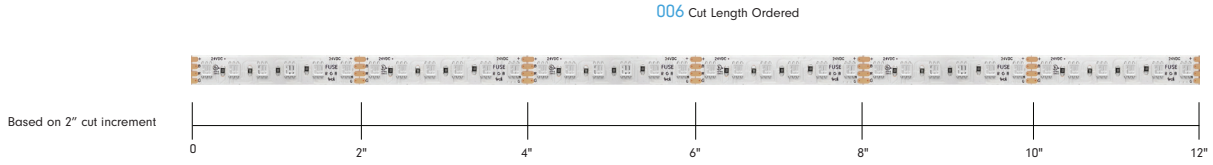

Example (B)

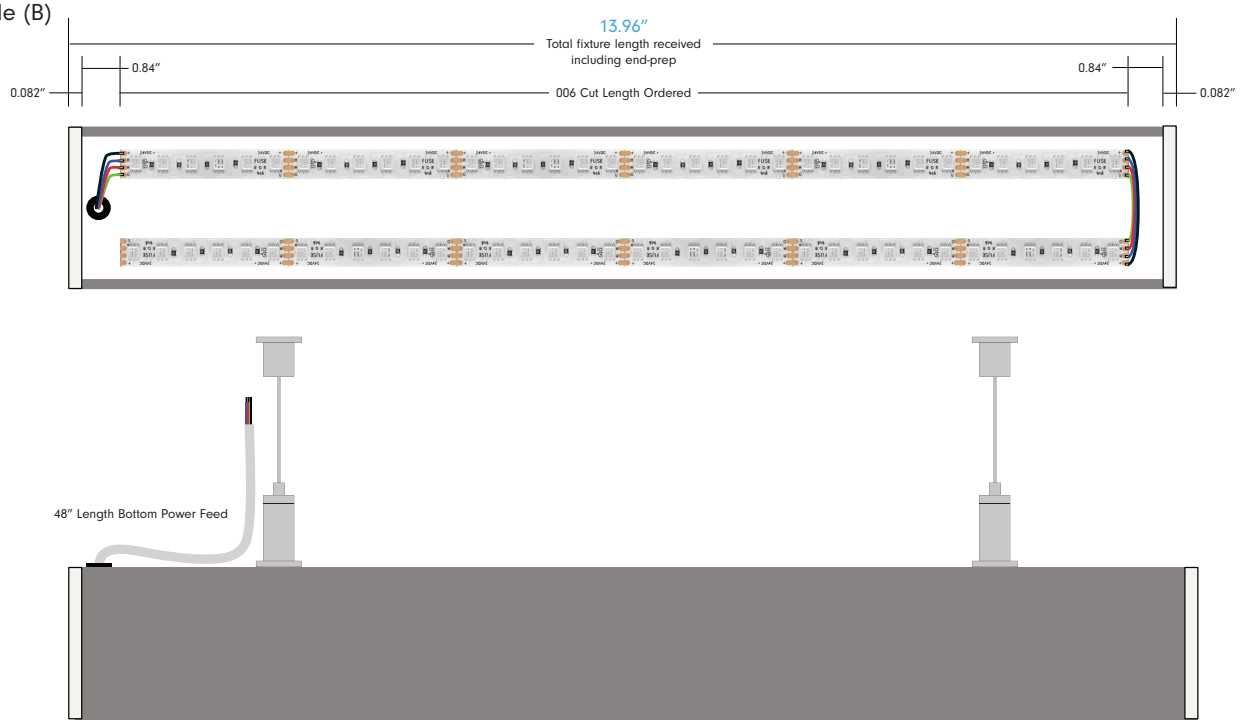

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 8.8W	NOMINAL LENGTH
005	12.95	1.08	8.15	1'
006	13.96	1.16	8.89	
007	15.98	1.33	10.37	
008	18.00	1.50	11.85	
009	20.02	1.67	13.33	
010	22.04	1.84	14.81	
011	24.06	2.01	16.29	2'
012	26.08	2.17	17.78	
013	28.10	2.34	19.26	
014	30.12	2.51	20.74	
015	32.14	2.68	22.22	
016	34.16	2.85	23.70	
017	36.18	3.02	25.18	3'
018	38.20	3.18	26.66	
019	40.22	3.35	28.15	
020	42.24	3.52	29.63	
021	44.26	3.69	31.11	

CUT INCREMENT	ACTUAL INCH	ACTUAL FOOT	WATTS 8.8W	NOMINAL LENGTH
022	46.28	3.86	32.59	
023	48.30	4.03	34.07	4'
024	50.32	4.19	35.55	
025	52.34	4.36	37.03	
026	54.36	4.53	38.51	
027	56.38	4.70	40.00	
028	58.40	4.87	41.48	
029	60.42	5.04	42.96	5'
030	62.44	5.20	44.44	
031	64.46	5.37	45.92	
032	66.48	5.54	47.40	
033	68.50	5.71	48.88	
034	70.52	5.88	50.37	
035	72.54	6.05	51.85	6'
036	74.56	6.21	53.33	
037	76.58	6.38	54.81	
038	78.60	6.55	56.29	6.5'

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Mounting Hardware



ANZI-XX-CBL
XX = **SS** (Stainless Steel),
BK (Black)
Anzio Suspension Hardware
Factory standard length 41'

In-Wall Controls



TVOQ-2-BK
Black



TVOQ-10-XX-7
XX = **BK** (Black), **WH** (White)

Controls



MDRX-AURA-XX
X = **02, 12, 32** (ports)
MADRIX Aura is a stand-alone controller for up to 2, 12, or 32 universes per unit



SP630E-S
All-In-One SPI/PWM Controller
Note: Control with available BT app or optional SP630E-R remote

Newtwork Accessories



DMX-SPLT-X
X= **2, 4, 8** (Output Channels)
DMX Splitter
1 Input to 8 Output
Ethernet or Hardwire Connection



ARTNET-L-X-512
X = **8** (8 Ports), **16** (Ports)
8 or 16 port universe Artnet to DMX interface, 16 port 8192



NTG-SWI-XXPT
XX = **8** (8 Ports), **16** (16 Ports)
NETGEAR 16-Port gigabit Unmanaged Switch



MDRX-LUNA-XX
X = **04, 08, 16** (ports)
MADRIX Luna 4, 8, 16 port universe Artnet to DMX interface
16 port 8192, 8 port 4096, 4 port 2048 DMX channels

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Power Supplies

DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-DIN	Indoor / Damp	100-277V AC 50/60 HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-DIN				2	2x96W	2x4A
	ADUL-320-3-4-24-DIN				3	3x96W	3x4A

DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-240-2-4-24-DIN-2	Indoor / Damp	100-277V AC 5o/60 Hz	24V DC	2	2x96W	2x4A
	ADUL-320-3-4-24-DIN-3				3	3x96W	3x4A

DMX/DALI FLICKER-FREE FOR TV STUDIO

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-120-1-4-24-DTV	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	1x96W	1x4A
	ADNM-240-2-4-24-DTV				2	2x96W	2x4A
	ADNM-320-3-4-24-DTV				3	3x96W	3x4A

Tivoli, LLC. reserves the right to modify this specification without prior notice.