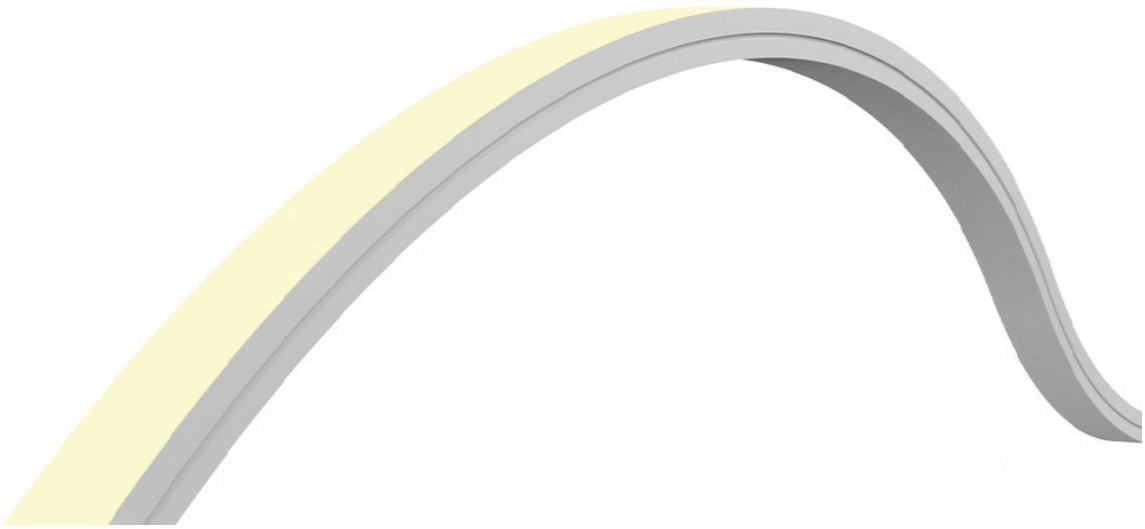

Project: _____ Type: _____

- Tunable white from 2200K - 6000K range for precise color choice when used with DMX controls and software
- Factory molded power lead and end cap
- Constructed using flexible SMD LEDs with zero voltage drop for reliability and uniformity of light
- Used to outline structures or where traditional glass neon is used
- Low Voltage 24V DC
- Long-life LEDs with tight cutting increments for precise field installation
- UV Stabilized for exterior use with silicone housing (no yellowing or cracking)
- IP67 Rating
- IK07 Rating - protected against 2 joules impact

Dimensions

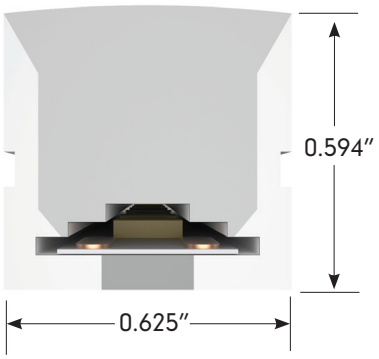

TRACE Vertical Bending Direction

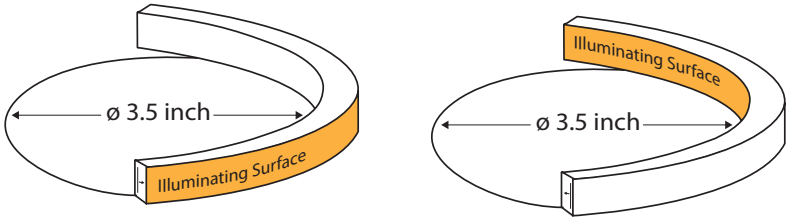

Convex/Concave Bending

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 08/25/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Order Specification Guide

NOTE: Lengths and quantity of each run must be submitted at time of order.

PRODUCT CODE		INTENSITY		PROFILE		LED COLOR		RANGE		VOLTAGE
TRCE	-		-	**V**	-	**TW**	-	**01**	-	**24**
TRCE = Trace Flexible Light		**L** = Low Output **S** = Standard Output **H** = High Output		**V** = Vertical		**TW** = Tunable White		**01** = 2200-6000K		**24** = 24V DC

Specifications

Output	Low Output	Standard Output	High Output
Lumens (lm/ft) All On	73	149	204
Power Consumption (W/ft)	1.5	3	4.5
Maximum Run	58'	29'	19'

LED Intensity	
Beam Angle	115.8°
LEDs	3014
Electrical	
Dimming	DMX
Input Voltage	24V DC
Physical	
Dimensions	0.625" x 0.594"
Cutting Increments	1.97"
Material	UV, Solvent, Saltwater resistant silicone
Wire Exit Options	Front, Side, Bottom
LED PIN Temperature	60.9°C / 141.6°F
Storage Temperature	-25°C / -13°F - 60°C / 140°F
Ambient Temperature	Ta_{min} = -25°C / -13°F, Ta_{max}
Certification and Testing	
Certification	cULus
Rated Life L70/hrs	54,000
Environment	Wet Location
IP Rating	IP67
IK Rating	IK07
Warranty	5 Years

- Maximum Run length refers to single side feed in serial connection
- The given color temperature is the strip (after coating) color temperature
- The given data are typical values due to the tolerances of the production process and electrical components; values for the light output and electrical power can vary up to 10%

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 08/25/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Factory Molded Power Lead and End Caps



FRONT
Vertical Front Lead Entry
10' Power Lead Cable with End Cap



SIDE
Vertical Side Lead Entry
10' Power Lead Cable with End Cap



BOTTOM
Vertical Bottom Lead Entry
10' Power Lead Cable with End Cap



END CAP
Vertical End Cap (No Lead)

Power Leads - How to Configure

It is important to note the orientation of TRACE TW and what is considered Left Facing and Right Facing. TRACE TW is polarity specific and proper submission of power leads for each run is necessary for factory prep standards.

VERTICAL TRACE TW - The cut window will always indicate as Bottom (Image B) and positive (+) politarity will indicate front facing (Image A).

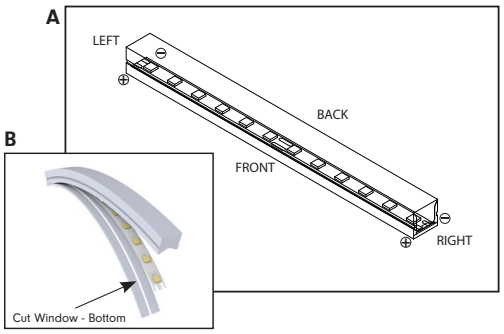

Molded Power Lead Configurations

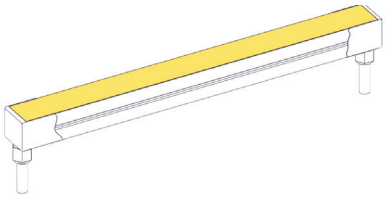

TRCE-V-TW-MLEAD-B-B
Left Facing Bottom Lead with 10' Power Cable to Right Facing Bottom Lead with 10' Power Cable

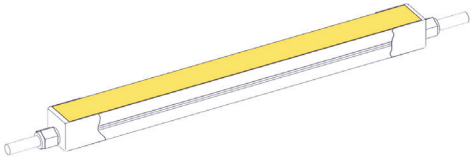

TRCE-V-TW-MLEAD-F-F
Left Facing Front Lead with 10' Power Cable to Right Facing Front Lead with 10' Power Cable

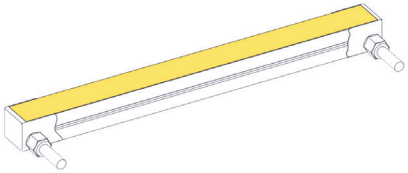

TRCE-V-TW-MLEAD-S-S
Left Facing Side Lead with 10' Power Cable to Right Facing Side Lead with 10' Power Cable

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Molded Power Lead Configurations

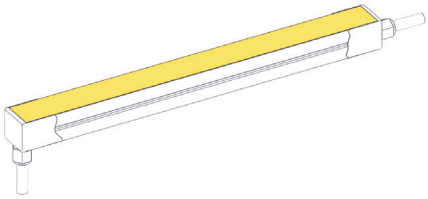

TRCE-V-TW-MLEAD-B-F
Left Facing Bottom Lead with 10' Power Cable to Right Facing Front Lead with 10' Power Cable

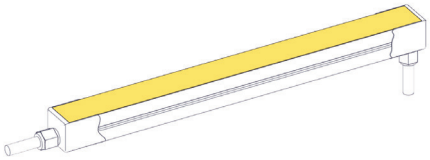

TRCE-V-TW-MLEAD-F-B
Left Facing Front Lead with 10' Power Cable to Right Facing Bottom Lead with 10' Power Cable

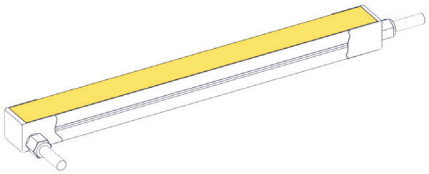

TRCE-V-TW-MLEAD-S-F
Left Facing Side Lead with 10' Power Cable to Right Facing Front Lead with 10' Power Cable

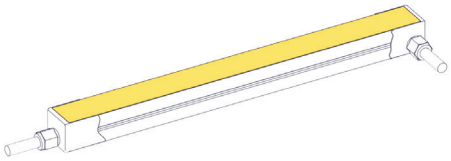

TRCE-V-TW-MLEAD-F-S
Left Facing Front Lead with 10' Power Cable to Right Facing Side Lead with 10' Power Cable

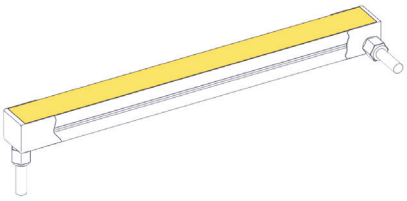

TRCE-V-TW-MLEAD-B-S
Left Facing Bottom Lead with 10' Power Cable to Right Facing Side Lead with 10' Power Cable

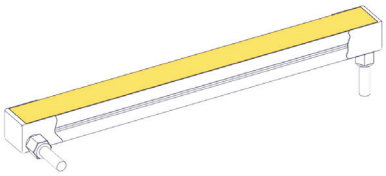

TRCE-V-TW-MLEAD-S-B
Left Facing Side Lead with 10' Power Cable to Right Facing Bottom Lead with 10' Power Cable

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 08/25/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Molded Power Lead Configurations

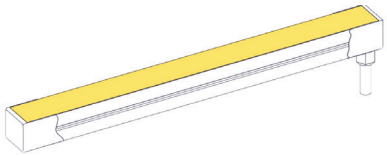

TRCE-V-TW-MLEAD-E-B
Left End Cap Lead to Right Facing Bottom Lead with 10' Power Cable

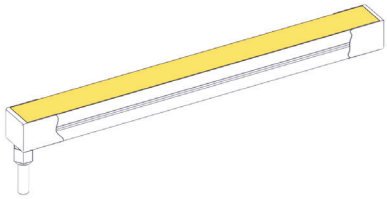

TRCE-V-TW-MLEAD-B-E
Left Facing Bottom Lead with 10' Power Cable to Right End Cap

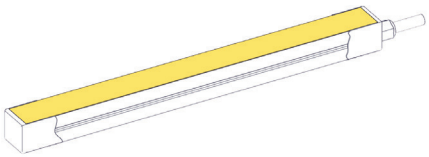

TRCE-V-TW-MLEAD-E-F
Left End Cap Lead to Right Facing Front Lead with 10' Power Cable

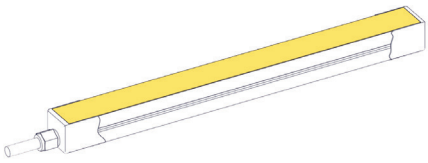

TRCE-V-TW-MLEAD-F-E
Left Facing Front Lead with 10' Power Cable to Right End Cap

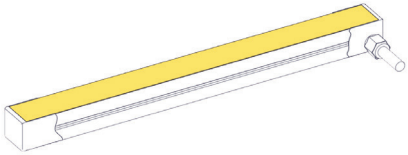

TRCE-V-TW-MLEAD-E-S
Left Facing End Cap Lead to Right Facing Side Lead with 10' Power Cable

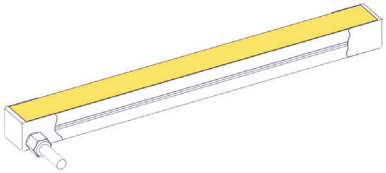

TRCE-V-TW-MLEAD-S-E
Left Facing Side Lead with 10' Power Cable to Right Facing End Cap

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 08/25/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Junction Box

GELJB-3-01-BK
1/2/3 Wire IP67 Small Gel Filled Junction Box

GELJB-3-02-BK
1/2/3 Wire IP67 Medium Gel Filled Junction Box

Mounting Options



TRCE-V-SLS-MTCLIPS
Mounting Clips Vertical Profile 2
Stainless Steel Clips with 2 Screws



TRCE-V-SLV-SCHAN-6.5
Straight Channel Vertical Profile
6.56' Length, Aluminum



TRCE-V-SLV-NCHAN-6.5
Notched Channel Vertical Profile
Radius Bend: 11"
6.56' Length, Aluminum

FLXD-SIL-GE-10
GE Silicone 10oz Tube
Use to adhere TRACE into entire run length of channel
10oz tube/25' bead length



TRCE-NS-V-EC
No-Screw End Cap, matte white
For in-field end of run

In-Wall Controls

TVOQ-10-XX-7
XX = **BK** (black), **WH** (white)
1024 DMX channel, 500 scene, 10 zone, glass touch screen

TVOQ-2-BK
Black, 512 DMX channel, 99 scene, 1 zone, glass touch screen

TVOQ-1-WHT
512 DMX channel, 16 scene, 4 zone, glass touch screen

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 08/25/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

DMX Sub-Controller

DESCRIPTION	CAT NO	MODES	WATTAGE	PRIMARY VOLTAGE	DIMENSION
DMX Basic Subcontroller	TPL-RGBW-180-24	Subcontroller only	5X96W	24V DC	2.87" W X 6.46" L X 1.45" H

Power Supplies - Indoor

ADUL - VARIABLE / DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-VW	Indoor / Damp	100-277V AC 50/60 HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-VW				2	2x96W	2x4A
	ADUL-320-3-4-24-VW				3	3x96W	3x4A

ADUL - VARIABLE / DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-240-2-4-24-VW-2	Indoor / Damp	100-277V AC 5o/60 Hz	24V DC	2	2x96W	2x4A
	ADUL-320-3-4-24-VW-3				3	3x96W	3x4A

Power Supplies - Outdoor

ADNM - VARIABLE / DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-90-1-4-24-VW	Indoor / Outdoor	100-277V AC 50/60 HZ	24V DC	1	90W	3.75A
	ADNM-120-1-4-24-VW				1	96W	4A
	ADNM-240-2-4-24-VW				2	2x96W	2x4A
	ADNM-320-3-4-24-VW				3	3x96W	3x4A

ADNM - VARIABLE / DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-240-2-4-24-VW-2	Indoor / Outdoor	100-277V AC 5o/60 Hz	24V DC	2	2x96W	2x4A
	ADNM-320-3-4-24-VW-3				3	3x96W	3x4A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Power Supplies - Outdoor

ADNM - 0-10V DYNAMIC WHITE SINGLE CIRCUIT

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-90-1-4-24-VAOT	Indoor / Outdoor	100-277V AC 50/60 Hz	24V DC	1	90W	3.75A
	ADNM-120-1-4-24-VAOT				1	96W	4A

ADNM - 0-10V DYNAMIC WHITE MULTI CIRCUIT

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-240-2-4-24-VAOT	Indoor / outdoor	100-277V AC 50/60 Hz	24V DC	2	2x96W	2x4A
	ADNM-320-3-4-24-VAOT				3	3x96W	3x4A

Dimmer + Driver

STANDARD 3 CHANNEL DRIVER + DIMMER 2 IN 1

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
Driver + Dimmer 3-Channel 2 in 1 Class 2	TDD-2-XXX-24	Indoor	120V AC 60Hz	24V DC	1	96W	4A

WIRELESS 3 CHANNEL DRIVER + DIMMER 2 IN 1

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
Wireless Driver + Dimmer 3-Channel 2 in 1 Class 2	TDD-2-XXX-24-KIT	Indoor	120V AC 60Hz	24V DC	1	96W	4A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 08/25/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458