
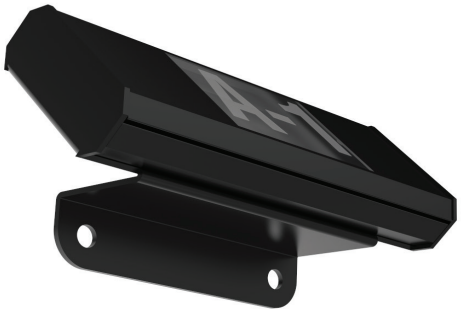


Project: _____ Type: _____

- The large lens (1.5″ x 1.12″) allows up to two rows of alphanumeric text and graphics.
- Laser-etched lens with black background creates a highly visible illumination of characters (assorted font styles available).
- Use with Two-Tone Bullnose nose and wireway with reflective edge.
- Damp listed outdoor version available. (See our Monogram™ Row Indicator fixture for floor mounted applications.)

Dimensions

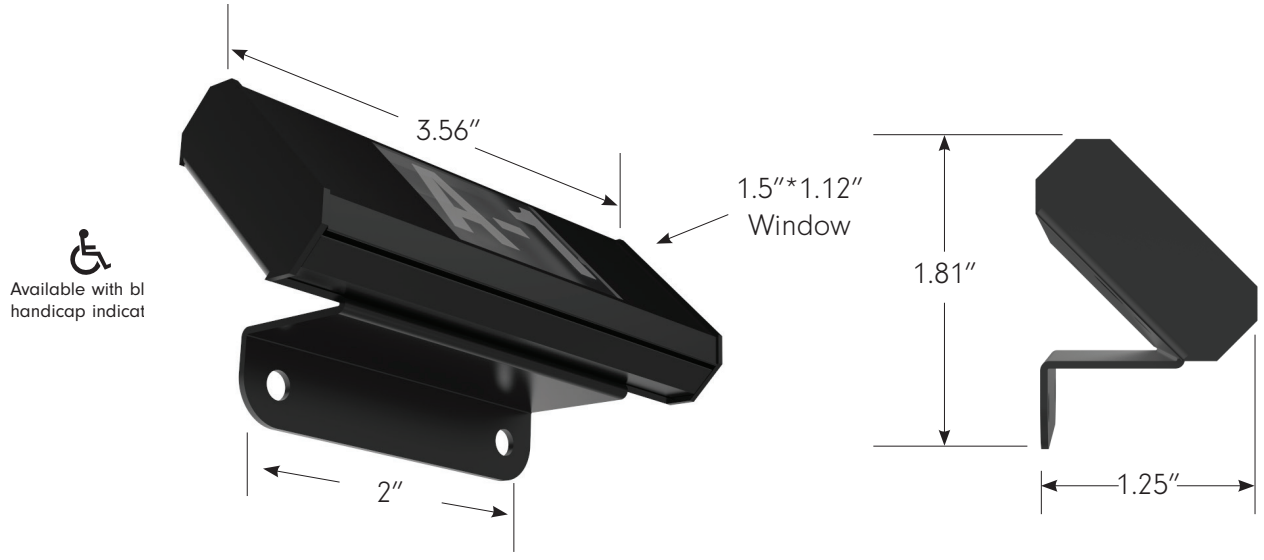

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 02.26.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Ordering Guide

PRODUCT CODE		LED COLOR		*STYLE		MOUNT
MSRI	-		-		-	**AM**
MSRI = Monogram Seat Row Indicator		**19** = 1900K **27** = 2700K **30** = 3000K **35** = 3500K **40** = 4000K **AM** = Amber **RD** = Red **BL** = Blue		**01** = 1 Row - 4 (Large Characters) **02** = 1 Row - 7 (Small Characters) **03** = 2 Row - Large Top Row Small Lower Row ***04** = 1 Row - Graphics and 3 Large Characters **HC** = Handicap Symbol **CS** = Custom (consult factory)		AM = Angled Mount

*Style

Use the window diagrams below to specify character requirements. Standard font used is Helvetica Condensed. Custom font styles are available, please note font at time of order.

01 STYLE - 1 ROW

Up To 4 Large characters - 1 Row — Examples below



02 STYLE - 1 ROW

Up To 7 Small characters - 1 Row — Examples below



03 STYLE - 2 ROW

Top Row: Up To 4 Medium characters or 7 Small Characters — Examples below

Bottom Row: Up To 7 Small characters



04 STYLE - 1 ROW

*Image and Up To 3 Medium characters — Examples below



Tivoli, LLC. reserves the right to modify this specification without prior notice.


Copyright © 2021 Tivoli 02.26.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458


Specification

Electrical	
Watts/Module	0.72
Lumens/Module	44.52
CRI	>80/TYP83
Kelvin Temp	1900K, 2700K, 3000K, 3500K, 4000K (+/- 80K) 3SDCM, Red, Blue, Amber
Operating Voltage	12V DC
Dimming	MLV
Certification and Testing	
Certification	cETLus
Environment	Damp Location
Power Supply	Class 2
Rated Life	75,000 hrs.
Warranty	5 years

Mounting Accessories



JBOX-LP
Junction box, low profile



BS-CC-8
Wall wireway, 8' Black Base & Conduit Cover



BSL-PC-1/4
0.25" Flex Conduit, Blackv

BS-CLAMP
Flex Conduit clamp. Fits 0.25" Flex Conduit.

In-Wall Controls



TVOQ-1-WH
White



TVOQ-10-XX-7
XX = **BK** (Black), **WH** (White)



TVOQ-2-BK
Black

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 02.26.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Power Supplies

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-D	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-D				2	2x60W	2x5A
	ADUL-240-3-5-12-D				3	3x60W	3x5A
	ADUL-320-4-5-12-D				4	4x60W	4x5A

ADUL - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DOT	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DOT				2	2x60W	2x5A
	ADUL-240-3-5-12-DOT				3	3x60W	3x5A
	ADUL-320-4-5-12-DOT				4	4x60W	4x5A

ADUL - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DIN	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DIN				2	2x60W	2x5A
	ADUL-240-3-5-12-DIN				3	3x60W	3x5A

ADUL - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	2	2x60W	2x5A
	ADUL-240-3-5-12-DIN-3				3	3x60W	3x5A
	ADUL-320-4-5-12-DIN-4				4	4x60W	4x5A

INFINITY - MLV / ELV / 0-10V / TRIAC

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-2.5-12	Indoor / Outdoor	100 - 277V AC	12V DC	1	30W	3W	2.5A
	INF-J-60-1-5-12				1	60W	6W	5A
	INF-J-180-3-5-12				3	3x60W	3x6W	3x5A
	INF-J-300-5-5-12				5	5x60W	5x6W	5x5A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)

DIMMING - MLV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

DIMMING - ELV


DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W

Tivoli, LLC. reserves the right to modify this specification without prior notice.


Copyright © 2021 Tivoli 02.26.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458


TwoTone Bullnose & Accessories




BNS-XXX-GY-12
XXX = **TT** (black/gray), **TT2** (black/2″gray), **SC** (solid gray)
TwoTone Bullnose, 12′ length




BNS-TT-EC-X
X = **L** (left side), **R** (right side)
Bullnose Overlap End Caps, black




BNS-CC-TT-EC-X
X = **L** (left side), **R** (right side)
Bullnose Carpet to Carpet End Caps, black



BS-CC-8
Wall Wireway, 8′ black base & conduit cover



BNS-TT-R-12
Step Reducer, 12′ section




STP-EXTNDR-12
Bullnose Step Landing Tread Extender, 12′




ADH-MB-75AM-XX
XX = **10** (10.1 oz tubes, **30** per case.), **29** (29 oz tubes **12** per case)



ADH-IA-10.2-CA
End cap clear liquid adhesive, 10.2 oz tubes sold individually, 12 per case




WW-XX-XX-8
XX = **CC** (Carpet to Carpet base), **CW** (Carpet to Wall base)
XX = **BK** (black lense), **GY** (gray lense)
Base and Cover Combo, 8′ length




WW-XX-BS-8
XX = **CC** (Carpet to Carpet), **CW** (Carpet to Wall)
Base Only, black, 8′ length




WW-TC-XX-8
XX = **CL** (clear) **BK** (black), **BZ** (bronze), **GY** (gray)
Top Cover Wire Way lens, 8′ length



TM-3/16
Concrete Screw 3/16″ x 1 3/4″



WW-CE-XX-8
XX = **BK** (black), **GY** (gray)
Carpet to Edge Base and Cover Combo, 8′ length



WW-CE-BS-8
Base Only, Carpet To Edge, black, 8′ length



RONDB-5/32
Concrete Drill Bit 5/32″

Tivoli, LLC. reserves the right to modify this specification without prior notice.