


Project: _____ Type: _____

- Compact size 9" x 1.25" x 0.875" hidden light source, tamper resistant seat mounted LED lighting system.
- Individually replaceable LED PCBs easily snap into Titanium modules for easy and economical maintenance.
- 48" super-flex conduit standard for wireway connection.
- Use with Tivoli's patented two-tone bullnose stair nosing and wireway with reflective edge to step delineation to maximize voltage drop.
- Tamper-resistant, seat-mounted, LED lighting system in a semi-rigid polycarbonate tube.
- Compact (0.281" x 0.312"), optically clear polycarbonate extruded tube and tamper-resistant fixture are pre-manufactured in standard 3", 4.5", 6.5", 9" and 11" lengths with 84" lead wire/dead end end preps (18AWG).

Dimensions

DIMMABLE

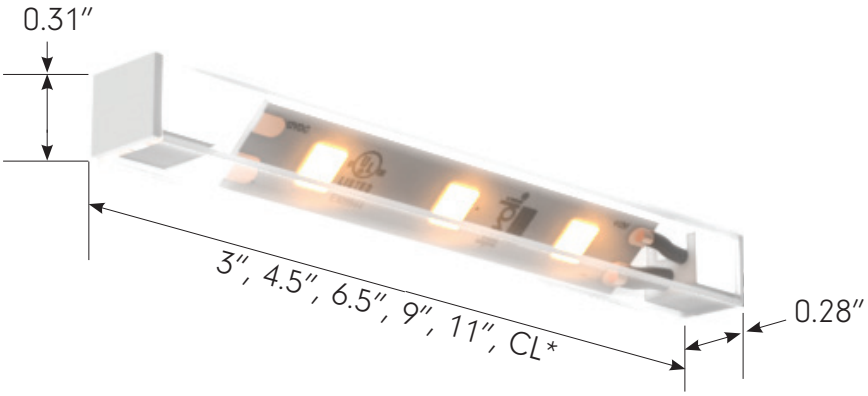

*Custom Length

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 01.28.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Ordering Guide

PRODUCT CODE		LENGTH		LED COLOR		POWER FEED		VOLTAGE
VLTP	-		-		-		-	**12**
VLTP = Versiline™ Seat Light		**03** = 3″ **04** = 4.5″ **06** = 6.5″ **09** = 9″ **11** = 11″ **CL** = Custom Length (specify length with order)		**27** = 2700K **30** = 3000K **40** = 4000K **62** = 6250K **AM** = Amber **RD** = Red **BL** = Blue		**L** = Left **R** = Right		12 = 12V DC


Note: Indicate feed side at time of order (Left or Right).

Specification


Tube Length	3″	4.5″	6.5″	9″	11″
*Lumens/fixture	13.2	26.4	38.5	50.6	63.25
*Watts/fixture	.24	.48	.70	.92	1.15
LEDs/fixture	3	6	9	12	15

Electrical (based on 2700K sample)	
Lumens/watt	55
CRI	82
Kelvin Temp	2700K, 3000K, 4000K, 6200K, Amber, Red, Blue
Max Watts/Feed	55W
Dimming	Yes
Beam Angle	120°
Operating Voltage	12V DC
Certification and Testing	
Certification	cETLus
Environment	Damp Location
Power Supply	Class 2
Rated Life	40,000 hrs.
Warranty	3 years

Mounting Accessories



JBOX-LP
Junction box, low profile



BS-CC-8
Wall wireway, 8' Black Base & Conduit Cover



FLXCNDT-3/8
3/8" Flex Conduit, Black sold per ft.

In-Wall Controls



TVOQ-1-WH
White



TVOQ-10-XX-7
XX = **BK** (Black), **WH** (White)



TVOQ-2-BK
Black

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 01.28.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Power Supplies

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-D	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-D				2	2x60W	2x5A
	ADUL-240-3-5-12-D				3	3x60W	3x5A
	ADUL-320-4-5-12-D				4	4x60W	4x5A

ADUL - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DOT	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DOT				2	2x60W	2x5A
	ADUL-240-3-5-12-DOT				3	3x60W	3x5A
	ADUL-320-4-5-12-DOT				4	4x60W	4x5A

ADUL - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DIN	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DIN				2	2x60W	2x5A
	ADUL-240-3-5-12-DIN				3	3x60W	3x5A

ADUL - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	2	2x60W	2x5A
	ADUL-240-3-5-12-DIN-3				3	3x60W	3x5A
	ADUL-320-4-5-12-DIN-4				4	4x60W	4x5A

INFINITY - MLV / ELV / 0-10V / TRIAC

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-2.5-12	Indoor / Outdoor	100 - 277V AC	12V DC	1	30W	3W	2.5A
	INF-J-60-1-5-12				1	60W	6W	5A
	INF-J-180-3-5-12				3	3x60W	3x6W	3x5A
	INF-J-300-5-5-12				5	5x60W	5x6W	5x5A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 01.28.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)

DIMMING - MLV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

DIMMING - ELV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 01.28.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458