



Project: _____ Type: _____

- Improved LED light guide for safer aisle and step navigation
- Flexible mounting for walls, seats, and other flat surfaces
- Evenly illuminated letters and numbers for intuitive wayfinding
- Comfortable, glare-free illumination that blends seamlessly into the environment
- Tamper-resistant design with robust cover retention exceeding 100 N
- High-efficiency performance with efficacy up to 96 lm/W
- Quick installation and easy field maintenance
- Sleek, modern design
- Large-format letters and numbers for maximum visibility

Dimensions

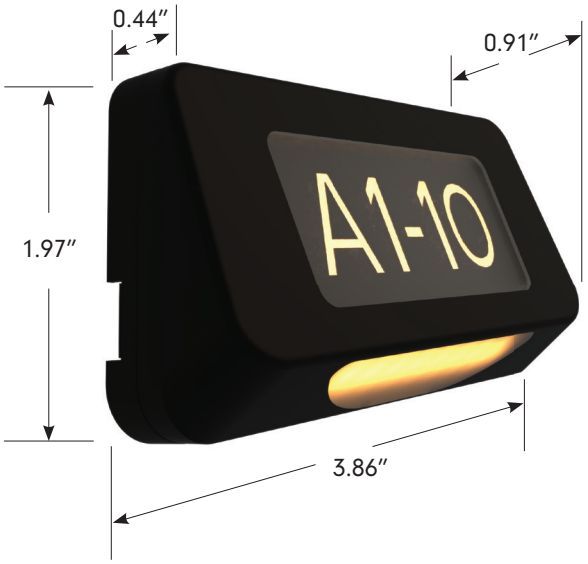

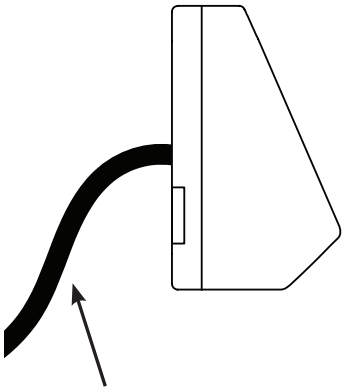

Mount Style:
Rear Mount Includes 48″ FLex Conduit
Wall Mount Includes 1″ Flex Conduit

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 09/30/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Order Guide


PRODUCT CODE	*MOUNT STYLE	LED COLOR	ROW INDICATOR OPTION	*ROW INDICATOR STYLE
MOD2				
MOD2 = Mode 2.0 Seat Light	**R** = Rear Mount **W** = Wall Mount	**30** = 3000K **27** = 2700K **AM** = Amber **RD** = Red **DB** = Dolby Blue	**RI** = Row indicator, CCT will match LED color 3000K or 2700K and requires written details with order Note: Leave blank if not required.	**01** = Characters only **02** = Graphics and Characters

Mount Style:
R = Includes 48" FLex Conduit
W = Includes 1" Flex Conduit

*ROW INDICATOR OPTIONS





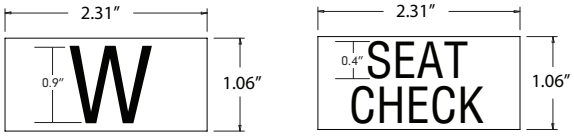

Note: Standard font used is Helvetica Condensed.
Font size will range from 0.9" - 0.4" depending on layout and number of charchaters.

Specification

2700K (+/- 150)	Standard	w/Row Indicator
Lumens	61.9	58.7
Lumens/watt	92	54
CRI	93.4	93.5
Watts/unit	0.67	1.1

3000K (+/- 200)	Standard	w/Row Indicator
Lumens	63	61.8
Lumens/watt	92	57
CRI	93.5	93.7
Watts/unit	0.68	1.1

Overall Specification

Electrical	
Dimmable	MLV /ELV /DMX /0-10V/TRIAC
Operating Voltage	12V DC

Certification and Testing	
Certification	cETLus
IP Rating	IP54
Rated Life	75,000 hrs.
Warranty	5 years

Point-to-Point

12 Inch Mount Height						
UNIT: FC	-15"	-9"	-3"	3"	9"	15"
6"	5.58	11.59	19.77	18.88	12.18	5.60
12"	5.09	8.54	11.96	11.96	8.73	4.97
18"	3.53	5.24	6.59	6.67	5.46	3.77
24"	2.64	3.50	4.18	4.38	3.73	2.88
30"	2.02	2.51	2.77	2.71	2.56	2.12
36"	1.54	1.79	1.96	1.95	1.82	1.59
42"	1.17	1.30	1.43	1.43	1.41	1.24
48"	0.90	1.00	1.06	1.06	1.08	0.94


14 Inch Mount Height						
UNIT: FC	-15"	-9"	-3"	3"	9"	15"
6"	3.34	8.54	15.82	13.56	10.98	5.97
12"	4.56	7.67	10.87	11.66	8.57	5.92
18"	3.70	5.27	7.24	7.02	6.01	4.29
24"	2.70	3.54	4.37	4.56	4.17	3.14
30"	2.20	2.55	3.15	3.07	2.96	2.32
36"	1.70	1.83	2.23	2.16	2.09	1.83
42"	1.34	1.48	1.60	1.62	1.55	1.42
48"	1.08	1.07	1.23	1.28	1.22	1.12

Tivoli, LLC. reserves the right to modify this specification without prior notice.


Copyright © Tivoli 09/30/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Mounting Accessories



JBOX-LP
Junction box, low profile



BS-CC-8
Wall wireway, 8' Black Base & Conduit Cover



BSL-PC-1/4
0.25" Flex Conduit, Black



BS-CLAMP
Flex Conduit clamp. Fits 0.25" Flex Conduit.

Replacement Parts



MOD2-COVER
Replacment cover plate



MOD2-COVER-RI-XX
Replacment cover plate with Row Indicator LED
XX = **27** (2700K), **30** (3000K)



MOD2-LED-XX
XX = **30** (30K), **27** (27K), **AM** (Amber), **RD** (Red), **DB** (Dolby Blue)
Replacment down LED




MOD2-RI-LED-XX
XX = **30** (30K), **27** (27K)
Replacment Row Indicator LED

In-Wall DMX Controls



TVOQ-1-WH
White



TVOQ-10-XX-7
XX = **BK** (Black), WH (White)



TVOQ-2-BK
Black

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 09/30/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Power Supplies

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-D	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-D				2	2x60W	2x5A
	ADUL-240-3-5-12-D				3	3x60W	3x5A
	ADUL-320-4-5-12-D				4	4x60W	4x5A

ADUL - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DOT	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DOT				2	2x60W	2x5A
	ADUL-240-3-5-12-DOT				3	3x60W	3x5A
	ADUL-320-4-5-12-DOT				4	4x60W	4x5A

ADUL - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DIN	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DIN				2	2x60W	2x5A
	ADUL-240-3-5-12-DIN				3	3x60W	3x5A

ADUL - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	2	2x60W	2x5A
	ADUL-240-3-5-12-DIN-3				3	3x60W	3x5A
	ADUL-320-4-5-12-DIN-4				4	4x60W	4x5A

INFINITY - MLV / ELV / 0-10V / TRIAC / PWM

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-2.5-12	Indoor / Outdoor	100 - 277V AC	12V DC	1	30W	3W	2.5A
	INF-J-60-1-5-12				1	60W	6W	5A
	INF-J-180-3-5-12				3	3x60W	3x6W	3x5A
	INF-J-300-5-5-12				5	5x60W	5x6W	5x5A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)

DIMMING - MLV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

DIMMING - ELV


DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W

Tivoli, LLC. reserves the right to modify this specification without prior notice.


Copyright © Tivoli 09/30/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458


TwoTone Bullnose & Accessories




BNS-XXX-GY-12
XXX = **TT** (black/gray), **TT2** (black/2″gray), **SC** (solid gray)
TwoTone Bullnose, 12′ length




BNS-TT-EC-X
X = **L** (left side), **R** (right side)
Bullnose Overlap End Caps, black




BNS-CC-TT-EC-X
X = **L** (left side), **R** (right side)
Bullnose Carpet to Carpet End Caps, black



BS-CC-8
Wall Wireway, 8′ black base & conduit cover



BNS-TT-R-12
Step Reducer, 12′ section




STP-EXTNDR-12
Bullnose Step Landing Tread Extender, 12′




ADH-MB-75AM-XX
XX = **10** (10.1 oz tubes, **30** per case.), **29** (29 oz tubes **12** per case)



ADH-IA-10.2-CA
End cap clear liquid adhesive, 10.2 oz tubes sold individually, 12 per case




WW-XX-XX-8
XX = **CC** (Carpet to Carpet base), **CW** (Carpet to Wall base)
XX = **BK** (black lense), **GY** (gray lense)
Base and Cover Combo, 8′ length




WW-XX-BS-8
XX = **CC** (Carpet to Carpet), **CW** (Carpet to Wall)
Base Only, black, 8′ length




WW-TC-XX-8
XX = **CL** (clear) **BK** (black), **BZ** (bronze), **GY** (gray)
Top Cover Wire Way lens, 8′ length



TM-3/16
Concrete Screw 3/16″ x 1 ¾″



WW-CE-XX-8
XX = **BK** (black), **GY** (gray)
Carpet to Edge Base and Cover Combo, 8′ length



WW-CE-BS-8
Base Only, Carpet To Edge, black, 8′ length



RONDB-5/32
Concrete Drill Bit 5/32″

Tivoli, LLC. reserves the right to modify this specification without prior notice.