
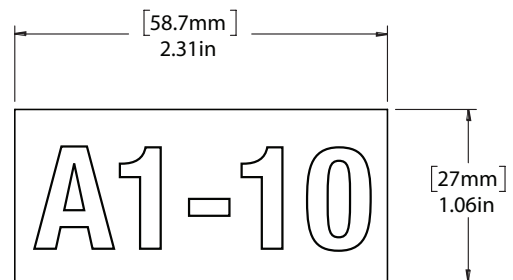


Project: _____ Type: _____

- Non-intrusive, glare-free illumination
- improved LED guide lighting of aisles and steps with edge-lit LED
- Multiple mounting applications - wall, standard seat and other flat surfaces
- Suitable for new construction and renovation
- Larger numerical or letter size for row indicator

Dimensions

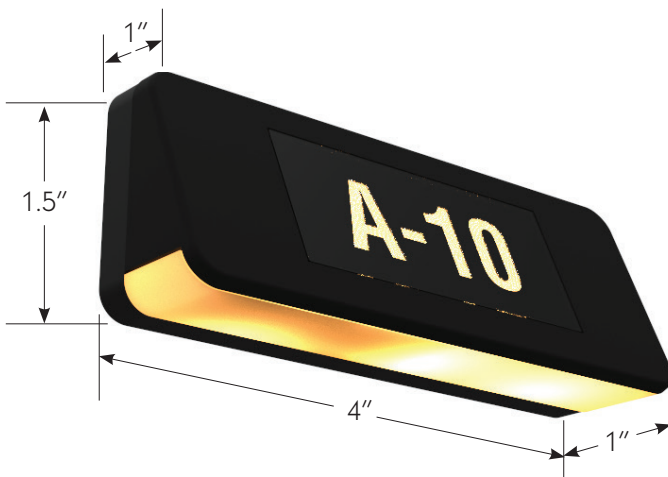

Order Guide

PRODUCT CODE <input type="text" value="MOD"/> MOD = Mode Seat Light	*MOUNT STYLE <input type="text"/> R = Rear Mount W = Wall Mount	LED COLOR <input type="text" value="30"/> 30 = 3000K 27 = 2700K	ROW INDICATOR OPTION <input type="text"/> RI = Row Indication Row indicator option requires written details with order	*ROW INDICATOR STYLE <input type="text" value="01"/> 01 = 5 Characters 02 = Graphics and 4 Characters
--	---	---	--	---

Mount Style:
 R = Includes 48" Flex Conduit
 W = Includes 1" Flex Conduit

Note: Leave blank if not required.

*Row Indicator Style

Use the window diagrams below to specify character requirements. Standard font used is Helvetica Condensed. Custom font styles are available, please note font at time of order.

01 STYLE

Up To 5 Characters



02 STYLE

*Image and Up To 4 characters




Specification


Electrical (based on 3000K)	
*Lumens	18
*Watts	0.37
*Lumens/watt	49
CRI	90
Kelvin Temp	2700K, 3000K
Dimmable	MLV /ELV /DMX /0-10V/TRIAC
Operating Voltage	12V DC
Certification and Testing	
Certification	cETLus
Environment	Damp Location
Rated Life	75,000 hrs.
Warranty	5 years

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Mounting Accessories



JBOX-LP
Junction box, low profile



BS-CC-8
Wall wireway, 8' Black Base & Conduit Cover



BSL-PC-1/4
0.25" Flex Conduit, Blackv

BS-CLAMP
Flex Conduit clamp. Fits 0.25" Flex Conduit.

Replacement Parts

MOD-COVER
Replacment cover plate

MOD-COVER-RI-XX
Replacment cover plate with Row Indicator LED
XX = 27, 30

In-Wall Controls



TVOQ-1-WH
White



TVOQ-10-XX-7
XX = BK (Black), WH (White)



TVOQ-2-BK
Black



Power Supplies

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-D	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-D				2	2x60W	2x5A
	ADUL-240-3-5-12-D				3	3x60W	3x5A
	ADUL-320-4-5-12-D				4	4x60W	4x5A

ADUL - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DOT	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DOT				2	2x60W	2x5A
	ADUL-240-3-5-12-DOT				3	3x60W	3x5A
	ADUL-320-4-5-12-DOT				4	4x60W	4x5A

ADUL - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DIN	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DIN				2	2x60W	2x5A
	ADUL-240-3-5-12-DIN				3	3x60W	3x5A

ADUL - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	2	2x60W	2x5A
	ADUL-240-3-5-12-DIN-3				3	3x60W	3x5A
	ADUL-320-4-5-12-DIN-4				4	4x60W	4x5A

INFINITY - MLV / ELV / 0-10V / TRIAC

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-2-5-12	Indoor / Outdoor	100 - 277V AC	12V DC	1	30W	3W	2.5A
	INF-J-60-1-5-12				1	60W	6W	5A
	INF-J-180-3-5-12				3	3x60W	3x6W	3x5A
	INF-J-300-5-5-12				5	5x60W	5x6W	5x5A

Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)


DIMMING - MLV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W


DIMMING - ELV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W


TwoTone Bullnose & Accessories




BNS-XXX-GY-12
XXX = TT (black/gray), **TT2** (black/2"gray), **SC** (solid gray)
 TwoTone Bullnose, 12' length




BNS-TT-EC-X
X = L (left side), **R** (right side)
 Bullnose Overlap End Caps, black




BNS-CC-TT-EC-X
X = L (left side), **R** (right side)
 Bullnose Carpet to Carpet End Caps, black



BS-CC-8
 Wall Wireway, 8' black base & conduit cover



BNS-TT-R-12
 Step Reducer, 12' section




STP-EXTNDR-12
 Bullnose Step Landing Tread Extender, 12'




ADH-MB-75AM-XX
XX = 10 (10.1 oz tubes, 30 per case.), **29** (29 oz tubes 12 per case)



ADH-IA-10.2-CA
 End cap clear liquid adhesive, 10.2 oz tubes sold individually, 12 per case




WW-XX-XX-8
XX = CC (Carpet to Carpet base), **CW** (Carpet to Wall base)
XX = BK (black lense), **GY** (gray lense)
 Base and Cover Combo, 8' length




WW-XX-BS-8
XX = CC (Carpet to Carpet), **CW** (Carpet to Wall)
 Base Only, black, 8' length



WW-TC-XX-8
XX = CL (clear) **BK** (black), **BZ** (bronze), **GY** (gray)
 Top Cover Wire Way lens, 8' length



TM-3/16
 Concrete Screw 3/16" x 1 3/4"



WW-CE-XX-8
XX = BK (black), **GY** (gray)
 Carpet to Edge Base and Cover Combo, 8' length



WW-CE-BS-8
 Base Only, Carpet To Edge, black, 8' length



RONDB-5/32
 Concrete Drill Bit 5/32"