


Project: _____ Type: _____

- Low-profile Natural or Black anodized aluminum base designed for 90° step angles.
- Tivotape™ are mounted at 45° in a weatherproof, fire-retardant, polycarbonate light tube suitable for outdoor wet applications.
- Shipped from factory pre-cut and pre-assembled in 3′, 3½′ and 4′ lengths with 4′ Lead Wire (specify side).
- Also available pre-assembled in custom lengths up to 12 feet (consult factory).

Dimensions

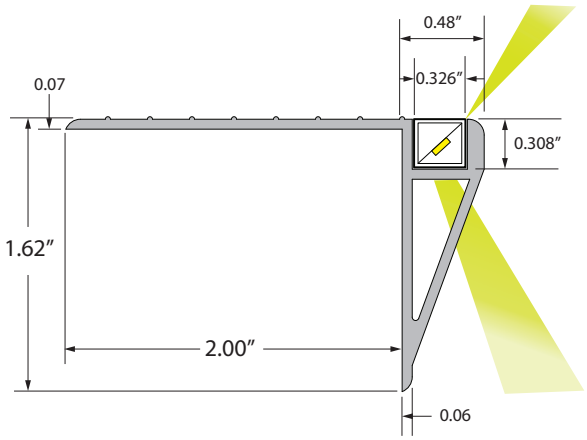

Copyright © 2021 Tivoli 10.20.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Order Guide

PRODUCT CODE		LED COLOR		LED SPACING		POWER FEED		FINISH	+	*LENGTH
PBS	-		-	**C**	-		-		+	
PBS = Premium Bare Step		**27** = 2700K **30** = 3000K **40** = 4000K **62** = 6200K **AM** = Amber **RD** = Red **BL** = Blue		C = Continuous		**L** = Left **R** = Right **B** = Both		**BK** = Black Anodized **NA** = Natural Aluminum		**2.0 = 2'** **2.5 = 2.5'** **3.0 = 3'** **3.5 = 3.5'** **4.0 = 4'** **4.5 = 4.5'** **5.0 = 5'** **5.5 = 5.5'** **6.0 = 6'** **6.5 = 6.5'** **7.0 = 7'** **7.5 = 7.5'** **8.0 = 8'** **8.5 = 8.5'** **9.0 = 9'** **9.5 = 9.5'** **10.0 = 10'** **10.5 = 10.5'** **11.0 = 11'** **11.5 = 11.5'** **12.0 = 12**

*Bare Step is manufactured to specified lengths to within 1/8"

Specification

Electrical (based on 2700K)	
Operating Voltage	12V DC
Lumens/ft	26.5
Watts/ft	1.46
Lumen/watt	20
Dimming	0-10V, MLV, ELV, DMX
CRI	>70/TYP72
Kelvin Temp	2700K (+/- 100K), 3000K (+/- 100K), 4000K(+/- 250K), 6200K(+/- 250K), Red, Blue, Amber
Physical	
Order Increments	6"
Maximum Ordering Length	12'
Certification and Testing	
Certification	cETLus, ADA, NFPA
Power Supply	Class 2
Rated Life	50,000 hrs.
Environment	IP 65
Warranty	5 years

Copyright © 2021 Tivoli 10.20.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Power Supplies

ADNM - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-60-1-5-12-D	Indoor / Outdoor	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADNM-80-1-5-12-D				1	60W	5A
	ADNM-150-2-5-12-D				2	2x60W	2x5A
	ADNM-240-3-5-12-D				3	3x60W	3x5A
	ADNM-320-4-5-12-D				4	4x60W	4x5A

ADNM - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-60-1-5-12-DOT	Indoor / Outdoor	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADNM-80-1-5-12-DOT				1	60W	5A
	ADNM-150-2-5-12-DOT				2	2x60W	2x5A
	ADNM-240-3-5-12-DOT				3	3x60W	3x5A
	ADNM-320-4-5-12-DOT				4	4x60W	4x5A

ADNM - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-60-1-5-12-DIN	Indoor / Outdoor	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADNM-80-1-5-12-DIN				1	60W	5A
	ADNM-150-2-5-12-DIN				2	2x60W	2x5A
	ADNM-240-3-5-12-DIN				3	3x60W	3x5A
	ADNM-320-4-5-12-DIN				4	4x60W	4x5A

ADNM - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 5o/60 Hz	12V DC	2	2x60W	5A
	ADNM-240-3-5-12-din-3				3	3x60W	3x5A

INFINITY - MLV / ELV / 0-10V / PWN / TRIAC

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-2.5-12	Indoor / Outdoor	100 - 277V AC	12V DC	1	30W	3W	2.5A
	INF-J-60-1-5-12				1	60W	6W	5A
	INF-J-180-3-5-12				3	3x60W	3x6W	3x5A
	INF-J-300-5-5-12				5	5x60W	5x6W	5x5A

Copyright © 2021 Tivoli 10.20.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)


DIMMING - MLV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W


DIMMING - ELV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W

Mounting Accessories & Replacement Part




ADH-MB-75AM-XX
XX = **10** (10.1 oz tubes, **30** per case.), **29** (29 oz tubes **12** per case)




TM-3/16
Concrete Screw 3/16" x 1 3/4"



RONDB-5/32
Concrete Drill Bit 5/32"




BS-CC-8
Wall Wireway, 8' black base & conduit cover



PBS-AL-BSE-XX
XX= **NA** (Natural Alumnium), **BK** (Black)
Replacement Premium Base

*Due to custom cut windows, exact step length is required at the time of ordering with desired existing on center spacing.



PBS-XX-XX-XXX
XX=**LF**(Left), **RF**(Right), **BF**(Both)
XX= **27, 30, 40, 62, AM, RD, BL**
XXX=**3.0**(3'), **3.5**(3.5'), **4.0**(4')
Replacement Strand, clear tube



PBS-EC-BK-X
Black End Cap
X = **R** (right), **L** (left)

Copyright © 2021 Tivoli 10.20.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458