

ECLIPSE

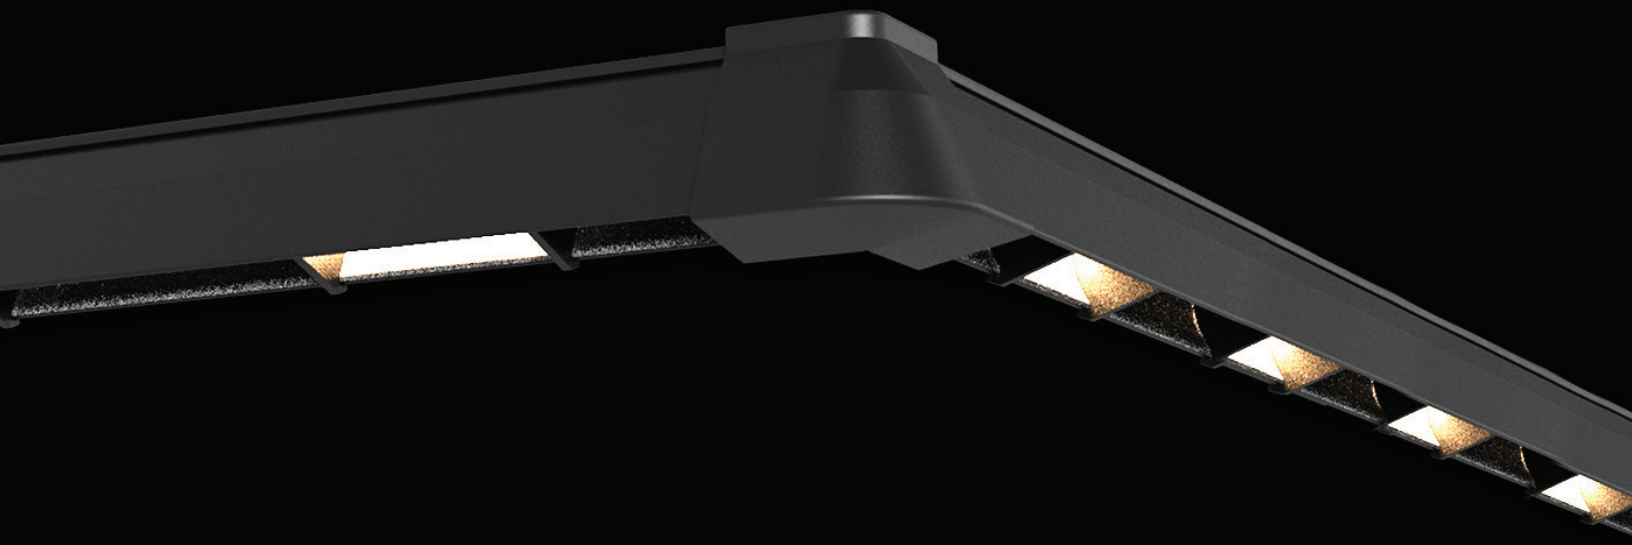

tivoli

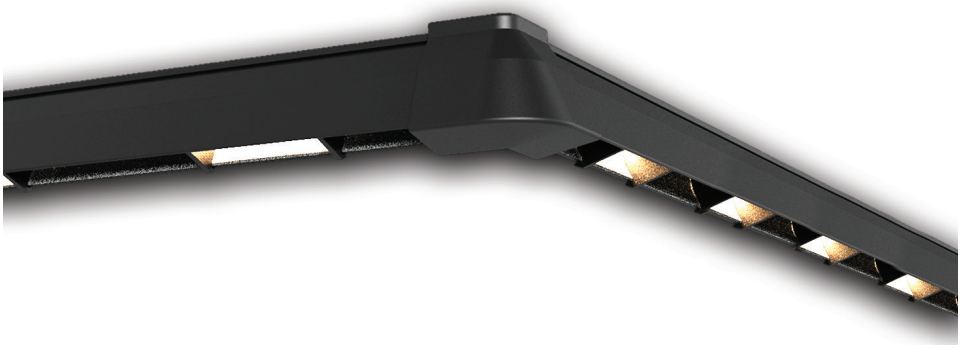



Project: _____ Type: _____

- Tivoli Titanium PCB engine delivers consistent color performance and high-quality light output across runs, ensuring reliable, uniform illumination.
- Clip-mount system plus joiner, angled, and inner/outer corner brackets enable fast, secure installation and seamless continuous runs - even on stairs and around corners.
- Exclusive light baffle minimizes patron glare and improves visual comfort while maintaining strong lumen performance.
- Designed for advanced linear LED aisle and architectural lighting, offering a durable, low-maintenance solution for professional installations.


Dimensions





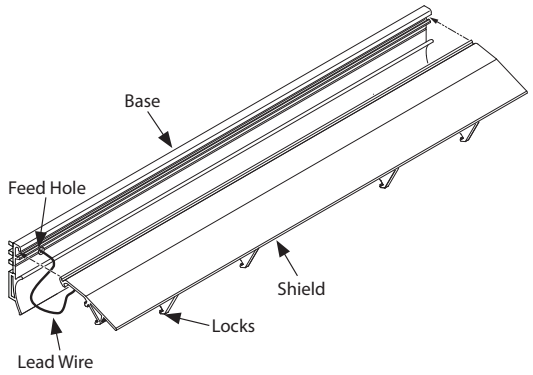

Proprietary system clips directly to mounting base for easy installation and maintenance.

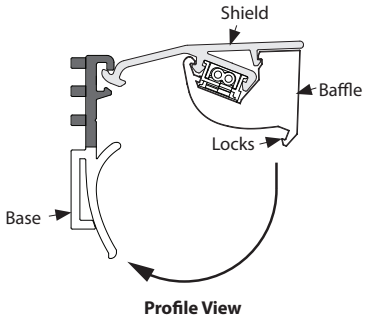

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 02/26/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Order Guide

PRODUCT CODE		PCB SPACING		LED COLOR		FIXTURE LENGTH
ECL	-		-		-	**8.0**
ECL = Eclipse Wall System		**06** = 6″ **12** = 12″		**19** = 1900K **27** = 2700K **30** = 3000K **35** = 3500K **40** = 4000K **AM** = Amber **RD** = Red **BL** = Blue		**8.0** = 8′

Sold in 8′ sections

Specification

6″ OC				
LED Color	1900°K - 4000K	Red	Blue	Amber
*Lumens/ft	7.2	15.8	7.2	17.7
*Watts/ft	1.2	1.52	1.2	1.8
*Lumen/Watt	6	10.4	6	9.84
Max Run Length	46′	36′	46′	30′


12″ OC				
LED Color	1900K - 4000K	Red	Blue	Amber
*Lumens/ft	3.0	5.2	3.0	4.92
*Watts/ft	0.6	.76	.6	.9
*Lumen/Watt	5	4	5	5
Max Run Length	90′	72′	90′	61′

CRI	>80/TYP83
Kelvin Temp	1900K, 2700K, 3000K, 3500K, 4000K (+/-80°K) 3SDCM, Red, Blue, Amber
Rated Life	75,000 hrs.
Order Length	8′
Operating Voltage	12V DC
Power Supply	Class 2
Dimmable	Yes
Warranty	5 years


*Based on 3000K Sample

Tivoli, LLC. reserves the right to modify this specification without prior notice.


Mounting Accessories




ECL-EC-X
X= **L** (left), **R** (right)
Eclipse End Cap




ECL-C-JNT
Eclipse continuous joint




ECL-D-JNT
Eclipse downward joint




ECL-U-JNT
Eclipse upward joint




ECL-OC-JNT
Eclipse outside corner joint




ECL-IC-JNT
Eclipse inside corner joint




JBOX-LP
Junction box, low profile



BS-CC-8
Wall wireway, 8' Black Base & Conduit Cover




BSL-PC-1/4
¼" Flex Conduit, Black



ECL-JUMPER-2
24 inch jumper/ lead wire



TM-2-3/8
Self tapping wall screw,
Phillips profile - 2 3/8" length




TM-1-1/2
Self tapping, deep cutting,
corkscrew-like thread,
Phillips profile - 1 1/2" length


Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 02/26/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458


Right and Left End Caps

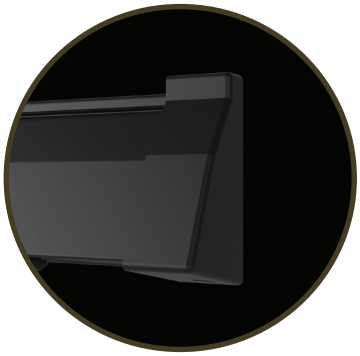


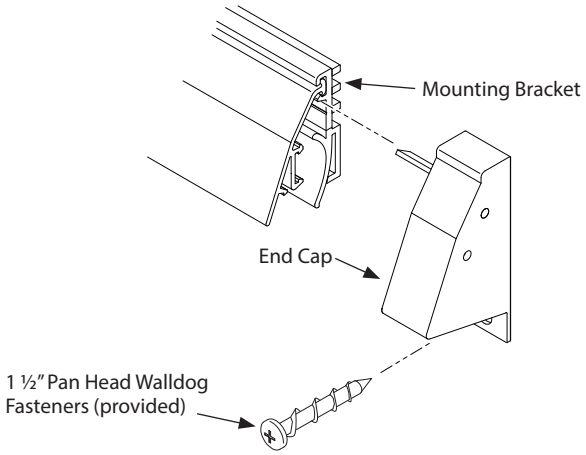


In-Line Joiner cover


for continuous straight runs

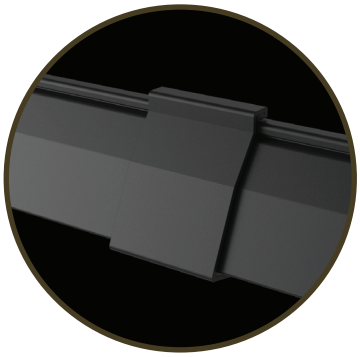

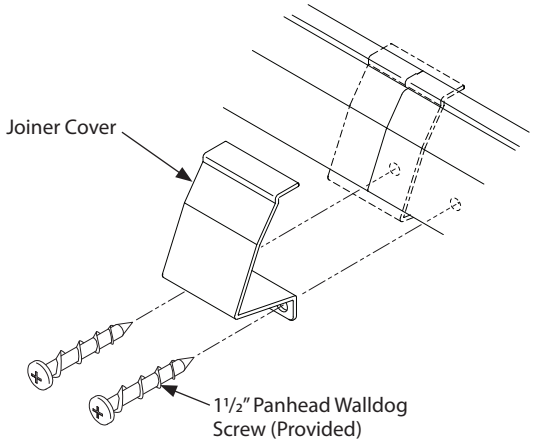

Downward Angle Joiner

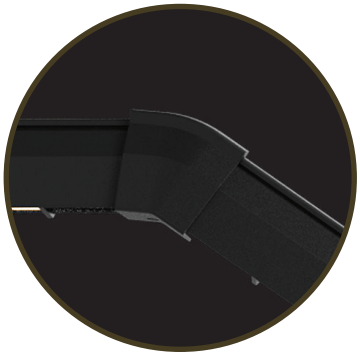

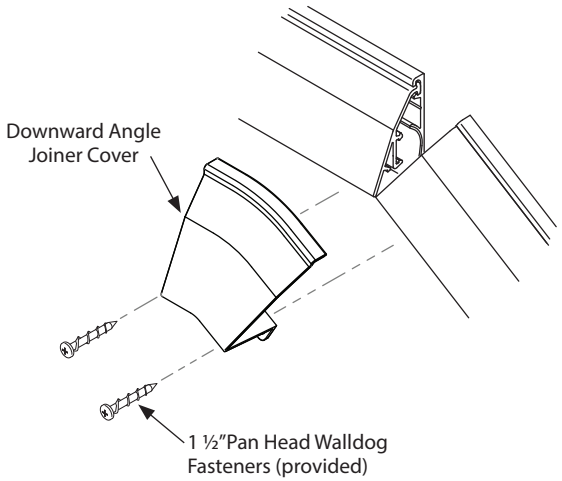



Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 02/26/26


www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458


Upward Angle Joiner

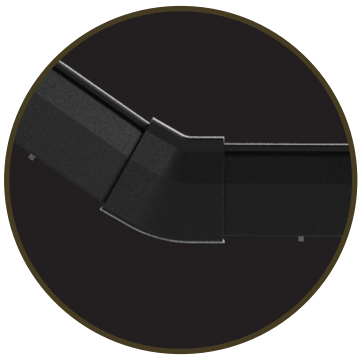

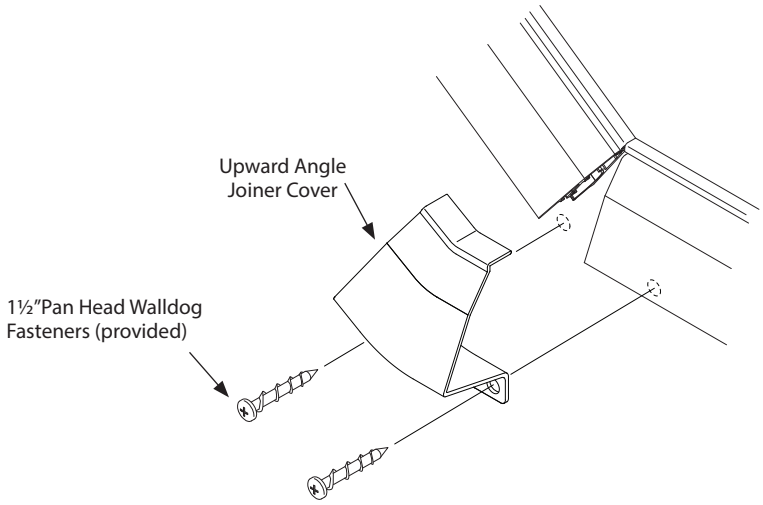


Outside Corner Joiner

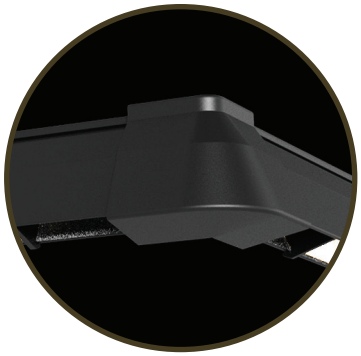

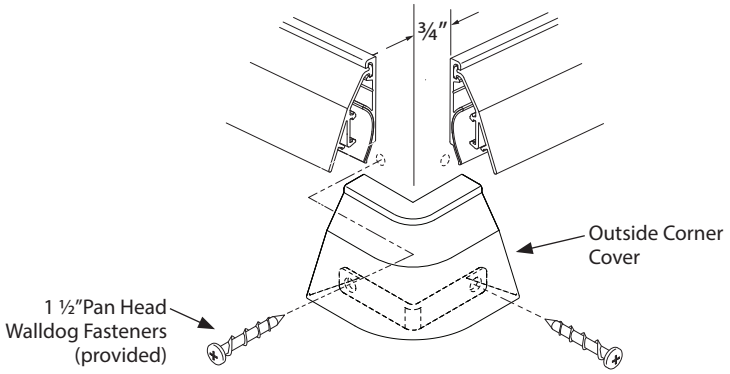


Inside Corner Joiner



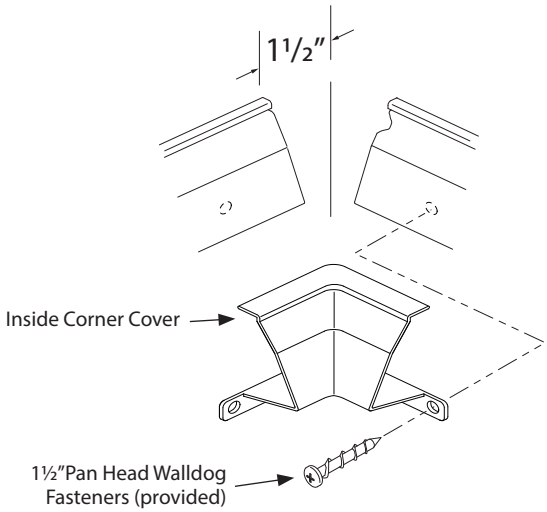


Tivoli, LLC. reserves the right to modify this specification without prior notice.

Replacement Parts




REPLACEMENT
SOLD PER EACH
01 SERIES SMD LED PCB BLACK
TTCL-T120-U-19
1900K
TTCL-T120-U-27
2700K
TTCL-T120-U-30
3000K
TTCL-T120-U-35
3500K

REPLACEMENT
SOLD PER EACH
01 SERIES SMD LED PCB BLACK
TTCL-T120-U-40
4000K
TTCL-T120-U-AM
AMBER
TTCL-T120-U-BL
BLUE
TTCL-T120-U-RD
RED




REPLACEMENT STRAND WITH 6" O.C. LED PCB SPACING
SOLD PER FT. - INDICATE AT TIME OF ORDERING.
ECL-06-STRAND-19
Replacement Strand With 1900K LED
ECL-06-STRAND-27
Replacement Strand With 2700K LED
ECL-06-STRAND-30
Replacement Strand With 3000K LED
ECL-06-STRAND-35
Replacement Strand With 3500K LED
ECL-06-STRAND-40
Replacement Strand With 4000K LED
ECL-06-STRAND-AM
Replacement Strand With Amber LED
ECL-06-STRAND-BL
Replacement Strand With Blue LED
ECL-06-STRAND-RD
Replacement Strand With Red LED


REPLACEMENT STRAND WITH 12" O.C. LED PCB SPACING
SOLD PER FT. - INDICATE AT TIME OF ORDERING.
ECL-12-STRAND-19
Replacement Strand With 1900K LED
ECL-12-STRAND-27
Replacement Strand With 2700K LED
ECL-12-STRAND-30
Replacement Strand With 3000K LED
ECL-12-STRAND-35
Replacement Strand With 3500K LED
ECL-12-STRAND-40
Replacement Strand With 4000K LED
ECL-12-STRAND-AM
Replacement Strand With Amber LED
ECL-12-STRAND-BL
Replacement Strand With Blue LED
ECL-12-STRAND-RD
Replacement Strand With Red LED




ECL-EC-L
Eclipse End Cap Left
ECL-EC-R
Eclipse End Cap Right




ECL-C-JNT
Eclipse continuous joint




ECL-D-JNT
Eclipse downward joint




ECL-U-JNT
Eclipse upward joint




ECL-OC-JNT
Eclipse outside corner joint




ECL-IC-JNT
Eclipse inside corner joint



ECL-BAFFLE
Eclipse Titanium PCB Baffle



ECL-SHIELD-8.0
Eclipse Shield, 8' length



ECL-BASE-8.0
Eclipse Base, 8' length

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Power Supplies

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-D	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-D				2	2x60W	2x5A
	ADUL-240-3-5-12-D				3	3x60W	3x5A
	ADUL-320-4-5-12-D				4	4x60W	4x5A

ADUL - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DOT	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DOT				2	2x60W	2x5A
	ADUL-240-3-5-12-DOT				3	3x60W	3x5A
	ADUL-320-4-5-12-DOT				4	4x60W	4x5A

ADUL - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DIN	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DIN				2	2x60W	2x5A
	ADUL-240-3-5-12-DIN				3	3x60W	3x5A

ADUL - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	2	2x60W	2x5A
	ADUL-240-3-5-12-DIN-3				3	3x60W	3x5A
	ADUL-320-4-5-12-DIN-4				4	4x60W	4x5A

INFINITY - MLV / ELV / 0-10V / PWM / TRIAC

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-2.5-12	Indoor / Outdoor	100 - 277V AC	12V DC	1	30W	3W	2.5A
	INF-J-60-1-5-12				1	60W	6W	5A
	INF-J-180-3-5-12				3	3x60W	3x6W	3x5A
	INF-J-300-5-5-12				5	5x60W	5x6W	5x5A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)

DIMMING - MLV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

DIMMING - ELV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W

DIMMING - DMX

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT PROTOCOL	MAX UNIVERSE
DMX Controller	TVOQ-1-WH	Indoor	5V DC	DMX 512	1
	TVOQ-2-BK		6V DC		
	TVOQ-2-WH				
	TVOQ-10-BK-7		6-7V DC		
	TVOQ-10-WH-7				2

In-Wall Controls





Touchscreen

TVOQ-1-WH
White



Touchscreen

TVOQ-10-XX-7
XX = **BK** (Black), **WH** (White)



Touchscreen


TVOQ-2-BK
Black

Tivoli, LLC. reserves the right to modify this specification without prior notice.


Copyright © Tivoli 02/26/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458


TwoTone Bullnose & Accessories




BNS-XXX-GY-12
XXX = **TT** (black/gray), **TT2** (black/2″gray), **SC** (solid gray)
TwoTone Bullnose, 12′ length




BNS-TT-EC-X
X = **L** (left side), **R** (right side)
Bullnose Overlap End Caps, black




BNS-CC-TT-EC-X
X = **L** (left side), **R** (right side)
Bullnose Carpet to Carpet End Caps, black



BS-CC-8
Wall Wireway, 8′ black base & conduit cover




BNS-TT-R-12
Step Reducer, 12′ section




STP-EXTNDR-12
Bullnose Step Landing Tread Extender, 12′




ADH-MB-75AM-XX
XX = **10** (10.1 oz tubes, **30** per case.), **29** (29 oz tubes **12** per case)




ADH-IA-10.2-CA
End cap clear liquid adhesive, 10.2 oz tubes sold individually, 12 per case




WW-XX-XX-8
XX = **CC** (Carpet to Carpet base), **CW** (Carpet to Wall base)
XX = **BK** (black lense), **GY** (gray lense)
Base and Cover Combo, 8′ length



WW-XX-BS-8
XX = **CC** (Carpet to Carpet), **CW** (Carpet to Wall)
Base Only, black, 8′ length



WW-CE-XX-8
XX = **BK** (black), **GY** (gray)
Carpet to Edge Base and Cover Combo, 8′ length




WW-CE-BS-8
Base Only, Carpet To Edge, black, 8′ length



WW-TC-XX-8
XX = **BK** (Black), **GY** (Gray), **CL** (Clear), **BZ** (Bronze)
Top Cover Wire Way lens, 8′ length



RON-DB-5/32
Concrete Drill Bit 5/32″



TM-3/16
Concrete Screw 3/16″ x 1 ¾″

Tivoli, LLC. reserves the right to modify this specification without prior notice.
Copyright © Tivoli 02/26/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458