


Project: _____ Type: _____

- Utilizes low-brightness LED TivoTape for a seamless, continuous lighting effect with no visible dotting.
- Optically clear polycarbonate co-extruded directional lens features 60° lighting cut-off for hidden, discreet illumination.
- Base and lens available in 8' field cuttable lengths with optional row indicator window.
- Use with Tivoli's patented two-tone bullnose stair nosing with reflective edge.

Dimensions

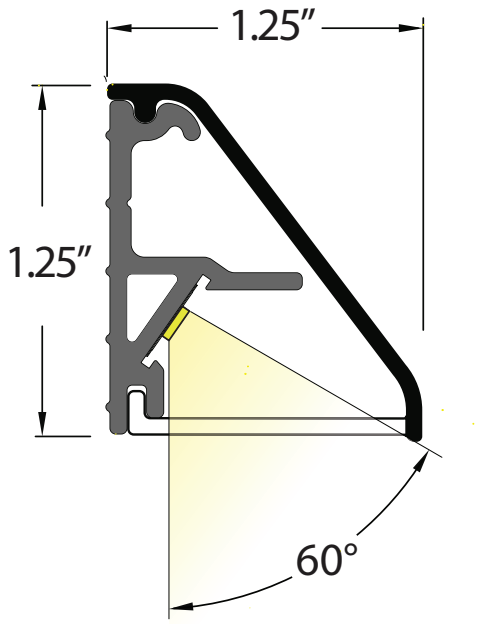

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 03.24.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Order Guide

PRODUCT CODE		COLOR		FINISH		FIXTURE LENGTH
FWC	-		-	**M**	-	**8.0**
FWC= Fantasma Wall Continuous		**27** = 2700K **30** = 3000K **40** = 4000K **62** = 6200K **AM** = Amber **RD** = Red **BL** = Blue		**M** = Matte		**8.0** = 8′


Specification

Output (based on 3000K)	
Lumens/ft	33
Watts/ft	1.45
CRI	93
Kelvin Temp	2700K, 3000K, 4000K, 6200K (+/- 100K), Red, Blue, Amber
Electrical	
Operating Voltage	12V DC
Maximum Run Length	37′
Power Supply	Class 2
Dimming	MLV/ELV/0-10V/DMX
Certification and Testing	
Certification	ADA, NFPA, cETLus
Rated Life	75,000 hrs.
Environment	Dry & Damp Location
Warranty	5 years


Replacement Part




FWTT-EC2-X
X = **L** (Left), **R** (Right)
Fantasma End Cap



FWC-LENS-M-8
Fantasma lens - 8′
WLS-BASE-8
Wall light system base - 8′



FWC-JUMPER-2
24 inch jumper/ lead wire



FWCLE-LB-I-XX-12
XX=**27** (2700K), **30** (3000K), **40** (4000K), **62** (6200K), **AM** (Amber), **BL** (Blue), **RD**(Red)
Low Brightness TivoTape, 12V
Replacement light engine, Sold per ft. and includes leads on both ends with 18-22AWG butt connectors attached. Specify length at time of ordering.

Tivoli, LLC. reserves the right to modify this specification without prior notice.


Copyright © 2021 Tivoli 03.24.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458


Mounting Accessories



BSL-PC-1/4
¼" Flex Conduit, Black




BS-CC-8
Wall Wireway, 8' black base & conduit cover




JBOX-LP
Junction box, low profile



TM-2-3/8
Self tapping wall screw, Phillips profile - 2 3/8" length



TM-1-1/2
Self tapping, deep cutting, corkscrew-like thread, Phillips profile - 1 1/2" length




FWTT-ST-JNT
Straight joint, matte black



FWTT-OV-CRNR
90° Outside vertical Joint, matte black



FWTT-IV-CRNR
90° Inside vertical Joint, matte black



FWTT-O-CRNR
Outside corner joint, matte black



FWTT-I-CRNR
Inside corner joint, matte black



FWTT-U-JNT
Upward wall joint, matte black



FWTT-D-JNT
Downward wall joint, matte black

In-Wall Controls



TVOQ-1-WH
White



TVOQ-10-XX-7
XX = **BK** (Black), **WH** (White)



TVOQ-2-BK
Black

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 03.24.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458



90° Vertical Outside



90° Vertical Inside

90° Vertical Inside and Outside Joints

Engineered for new theater formats that include reclining seats; these new brackets enable full cut off glare. The vertical part of the assembly over the stairs acts as a wire way to continuous LEDs installed on the horizontal portion over each step to achieve the full cut off of glare. This new method follows the stair line verses the hand rail line of the 35° joint.






35° Up



35° Down

35° Joints

Engineered for 35° downward mounting angles over the stairs, in theaters, where standard seating and landing spacing are utilized. This method may not fully eliminate glare as with the 90° joints and installation method.

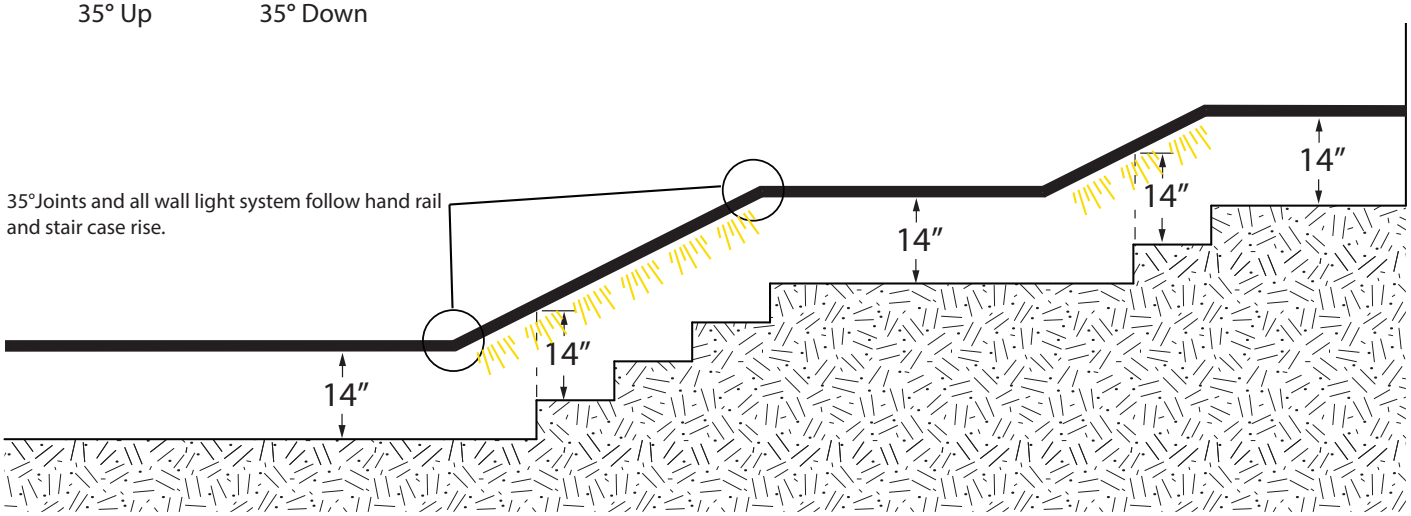

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 03.24.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Power Supplies

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-D	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-D				2	2x60W	2x5A
	ADUL-240-3-5-12-D				3	3x60W	3x5A
	ADUL-320-4-5-12-D				4	4x60W	4x5A

ADUL - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DOT	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DOT				2	2x60W	2x5A
	ADUL-240-3-5-12-DOT				3	3x60W	3x5A
	ADUL-320-4-5-12-DOT				4	4x60W	4x5A

ADUL - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DIN	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DIN				2	2x60W	2x5A
	ADUL-240-3-5-12-DIN				3	3x60W	3x5A

ADUL - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	2	2x60W	2x5A
	ADUL-240-3-5-12-DIN-3				3	3x60W	3x5A
	ADUL-320-4-5-12-DIN-4				4	4x60W	4x5A

INFINITY - MLV / ELV / 0-10V / PWM / TRIAC

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-2.5-12	Indoor / Outdoor	100 - 277V AC	12V DC	1	30W	3W	2.5A
	INF-J-60-1-5-12				1	60W	6W	5A
	INF-J-180-3-5-12				3	3x60W	3x6W	3x5A
	INF-J-300-5-5-12				5	5x60W	5x6W	5x5A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 03.24.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)

DIMMING - MLV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

DIMMING - ELV


DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W

Tivoli, LLC. reserves the right to modify this specification without prior notice.


Copyright © 2021 Tivoli 03.24.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458


TwoTone Bullnose & Accessories




BNS-XXX-GY-12
XXX = **TT** (black/gray), **TT2** (black/2″gray), **SC** (solid gray)
TwoTone Bullnose, 12′ length




BNS-TT-EC-X
X = **L** (left side), **R** (right side)
Bullnose Overlap End Caps, black




BNS-CC-TT-EC-X
X = **L** (left side), **R** (right side)
Bullnose Carpet to Carpet End Caps, black



BS-CC-8
Wall Wireway, 8′ black base & conduit cover



BNS-TT-R-12
Step Reducer, 12′ section




STP-EXTNDR-12
Bullnose Step Landing Tread Extender, 12′




ADH-MB-75AM-XX
XX = **10** (10.1 oz tubes, **30** per case.), **29** (29 oz tubes **12** per case)




ADH-IA-10.2-CA
End cap clear liquid adhesive, 10.2 oz tubes sold individually, 12 per case




WW-XX-XX-8
XX = **CC** (Carpet to Carpet base), **CW** (Carpet to Wall base)
XX = **BK** (black lense), **GY** (gray lense)
Base and Cover Combo, 8′ length



WW-XX-BS-8
XX = **CC** (Carpet to Carpet), **CW** (Carpet to Wall)
Base Only, black, 8′ length



WW-CE-XX-8
XX = **BK** (black), **GY** (gray)
Carpet to Edge Base and Cover Combo, 8′ length




WW-CE-BS-8
Base Only, Carpet To Edge, black, 8′ length



WW-TC-XX-8
XX = **BK** (Black), **GY** (Gray), **CL** (Clear), **BZ** (Bronze)
Top Cover Wire Way lens, 8′ length



RONDB-5/32
Concrete Drill Bit 5/32″



TM-3/16
Concrete Screw 3/16″ x 1 ³/₄″

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 03.24.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458