


Project: _____ Type: _____

- Multiple lines of alphanumeric text possible with wider window for additional seat/row graphics (up to 2 rows).
- Evenly illuminated edge lit light source.
- Vinyl black background creates a highly visible illumination of characters (assorted font types available)
- Base plate mounts to bare floor surface for carpeted applications.
- Replaceable base with integrated LED assembly for easy installation and replacement.

Dimensions

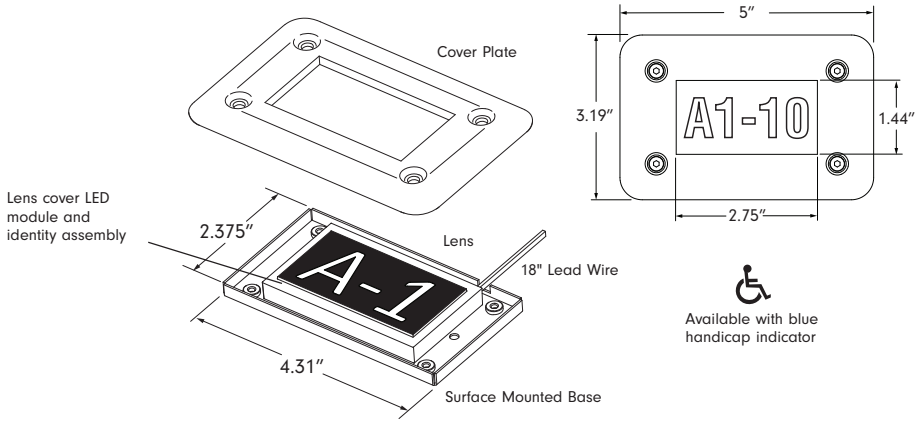

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 01.12.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Order Guide

PRODUCT CODE	LED COLOR	STYLE	FONT	MOUNT	FINISH
MNG					
MNG = Monogram Surface	**19** = 1900K **27** = 2700K **30** = 3000K **35** = 3500K **40** = 4000K **AM** = Amber **RD** = Red **BL** = Blue	**01** = 1 Row - 4 Large Characters (1" letters) **02** = 1 Row - 7 Small Characters (.75" letters) **03** = 2 Row - Large Top Row Small Lower Row **04** = 1 Row - Graphics and 3 Medium Characters **HC** = Handicap Symbol **CS** = Custom (consult factory)	**H** = Helvetica Condensed **C** = Custom Font (specify font type)	SM = Surface Mount	BLK = Black

Specification

Electrical (based on 3000K)	
Operating Voltage	12V DC
Dimming	0-10V, MLV, ELV, DMX
Watt/module	0.2
CRI	>80/TYP83
Kelvin Temp	1900K (+/- 100K), 2700K (+/- 100K), 3000K (+/- 100K), 3500K (+/- 100K), 4000K (+/- 150K), Red, Blue, Amber
Certification and Testing	
Certification	cETLus, ADA, NFPA
Power Supply	Class 2
Rated Life	50,000 hrs.
Environment	Dry & Wet Location
Warranty	5 years


Character Text Ordering Information

Use the window diagrams below to specify character requirements. Standard font used is Helvetica Condensed. Custom font styles are available, please note font at time of order.

01 STYLE - 1 ROW

Up To 4 Large characters - 1 Row


Examples below

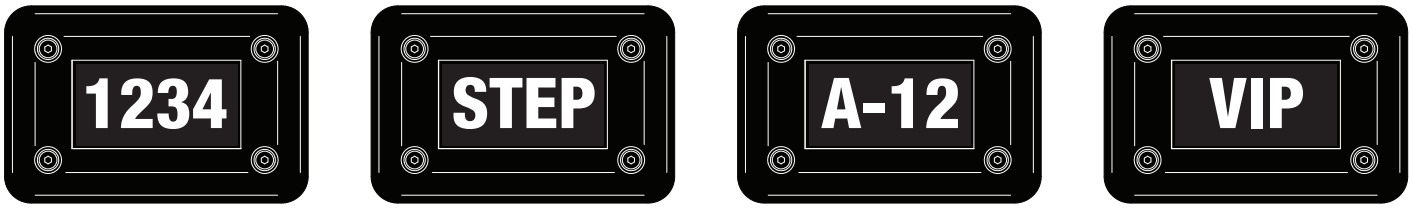

02 STYLE - 1 ROW

Up To 7 Small characters - 1 Row

Examples below

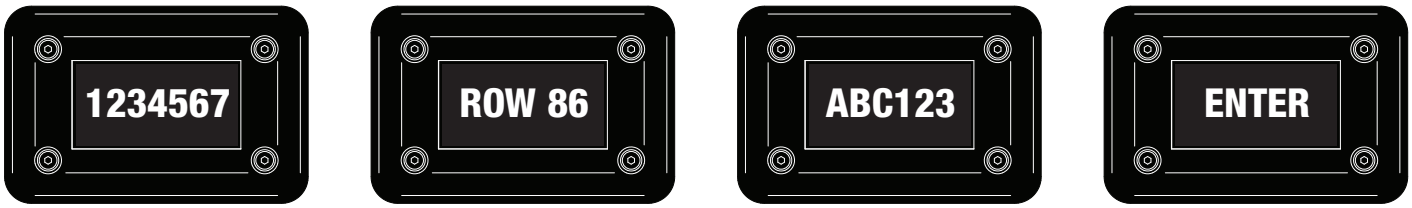

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 01.12.2026


www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

03 STYLE - 2 ROW


Top Row: Up To 4 Medium characters or 7 Small Characters — Examples below

Bottom Row: Up To 7 Small characters










04 STYLE - 1 ROW


*Image and Up To 3 Medium characters — Examples below









Replacement Parts




MNG-XX-XX
XX=**19**(1900K), **27**(2700K), **30**(3000K), **35**(3500K), **40**(4000K), **AM**(Amber), **RD**(Red), **BL**(Blue)
XX=(STYLE) **01**,**02**,**03**,**04**,**HC** (Handicap Symbol), **CS** (Custom)
Light Module Only



MNG-SM-BLK
Face Plate
Cover plate - Black



MNG-COVERSCREW
COVERPLATE SCREWS
Black oxide coated corrosion resistant 3/8" screws for damp environments



MNG-BASE
Base Plate
Surface Mount Base Plate

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Power Supplies

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-D	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-D				2	2x60W	2x5A
	ADUL-240-3-5-12-D				3	3x60W	3x5A
	ADUL-320-4-5-12-D				4	4x60W	4x5A

ADUL - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DOT	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DOT				2	2x60W	2x5A
	ADUL-240-3-5-12-DOT				3	3x60W	3x5A
	ADUL-320-4-5-12-DOT				4	4x60W	4x5A

ADUL - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DIN	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DIN				2	2x60W	2x5A
	ADUL-240-3-5-12-DIN				3	3x60W	3x5A

ADUL - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	2	2x60W	2x5A
	ADUL-240-3-5-12-DIN-3				3	3x60W	3x5A
	ADUL-320-4-5-12-DIN-4				4	4x60W	4x5A

INFINITY - MLV / ELV / 0-10V / PWM / TRIAC

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-2.5-12	Indoor / Outdoor	100 - 277V AC	12V DC	1	30W	3W	2.5A
	INF-J-60-1-5-12				1	60W	6W	5A
	INF-J-180-3-5-12				3	3x60W	3x6W	3x5A
	INF-J-300-5-5-12				5	5x60W	5x6W	5x5A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 01.12.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)

DIMMING - MLV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

DIMMING - ELV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W

In-Wall Controls



Touchscreen

TVOQ-1-WH
White
16 DMX channel, 16 scene,
4 zone, glass touch screen



Touchscreen

TVOQ-10-XX-7
XX = **BK** (Black), **WH** (White)
1024 DMX channel, 500 scene,
10 zone, glass touch screen




Touchscreen

TVOQ-2-BK
Black
512 DMX channel, 99 scene


Tivoli, LLC. reserves the right to modify this specification without prior notice.
Copyright © 2021 Tivoli 01.12.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458


TwoTone Bullnose & Accessories




BNS-XXX-GY-12
XXX = **TT** (black/gray), **TT2** (black/2″gray), **SC** (solid gray)
TwoTone Bullnose, 12′ length




BNS-TT-EC-X
X = **L** (left side), **R** (right side)
Bullnose Overlap End Caps, black




BNS-CC-TT-EC-X
X = **L** (left side), **R** (right side)
Bullnose Carpet to Carpet End Caps, black



BS-CC-8
Wall Wireway, 8′ black base & conduit cover



BNS-TT-R-12
Step Reducer, 12′ section




STP-EXTNDR-12
Bullnose Step Landing Tread Extender, 12′




ADH-MB-75AM-XX
XX = **10** (10.1 oz tubes, **30** per case.), **29** (29 oz tubes **12** per case)



ADH-IA-10.2-CA
End cap clear liquid adhesive, 10.2 oz tubes sold individually, 12 per case




WW-XX-XX-8
XX = **CC** (Carpet to Carpet base), **CW** (Carpet to Wall base)
XX = **BK** (black lense), **GY** (gray lense)
Base and Cover Combo, 8′ length




WW-XX-BS-8
XX = **CC** (Carpet to Carpet), **CW** (Carpet to Wall)
Base Only, black, 8′ length




RONDB-5/32
Concrete Drill Bit 5/32″



TM-3/16
Concrete Screw 3/16″ x 1 ¾″



WW-CE-XX-8
XX = **BK** (black), **GY** (gray)
Carpet to Edge Base and Cover Combo, 8′ length



WW-CE-BS-8
Base Only, Carpet To Edge, black, 8′ length

Tivoli, LLC. reserves the right to modify this specification without prior notice.