





Project: _____ Type: _____

- Illuminated walkway edge delineation system for theaters and auditoriums
- Patented aisle lighting edge delineation system
- Field-cuttable, co-extruded PVC
- Titanium Series LED lighting engine
- Quick LED maintainece for replacement in field
- Impervious to water and includes an integral seal for each end
- 5 Year warranty

Dimensions

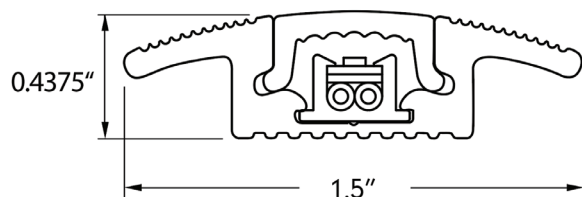

Carpet-To-Carpet
Carpet-To-Wall

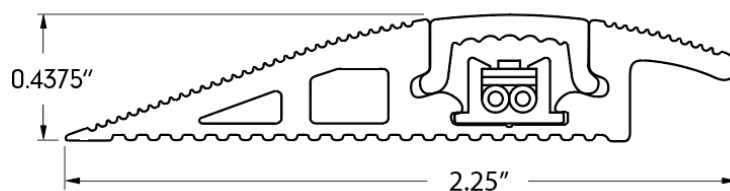

Carpet-to-Edge




Order Guide

PRODUCT CODE	PROFILE	LED COLOR	SPACING	LENS	LENGTH
SATT					
SATT = Soft Aisle Titanium	CC = Carpet to Carpet CW = Carpet to Wall CE = Carpet to Edge	19 = 1900K 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K AM = Amber RD = Red BL = Blue	04 = 4" 06 = 6" 12 = 12" 18 = 18"	C = Clear B = Bronze	4.0 = 4' 8.0 = 8'

Specification

Output (based on 3000K)				
LED Spacing	4"	6"	12"	18"
Watts/ft	0.0036	0.0024	0.0012	0.0008
CRI	>80 / TYP 83			
Availalbe Kelvin Temp	1900K, 2700K, 3000K, 3500K, 4000K, Red, Blue, Amber			
Electrical				
Input Voltage	12V			
Control	DMX			
Dimming	Not recommended due to low wattage consumption			
Maximum Run	120' / <1W			
Physical				
LED Package	Tivoli Titanium LED			
Order Increments	4', 8'			
Operating Temperature	-40°F (-40°C) ~ +140°F (+60°C)			
Certification and Testing				
Certification	ETL Listed			
Lumen Maintenance (L70)	75,000 hrs			
Environment	IP54			
Warranty	5 years			


End Caps



SATT-CW-CC-EC-06

Left/Right End Cap
carpet to wall/carpet assembly
includes 6" pre-mitered length
with clear lens.

SATT-CW-CC-EC-06-B
with bronze lens



SATT-CE-LS-EC-06

Left End Cap
carpet to edge assembly
includes 6" pre-mitered length
with clear lens

SATT-CE-LS-EC-06-B
with Bronze Lens




SATT-CE-RS-EC-06

Right End Cap
carpet to edge assembly
includes 6" pre-mitered length
with clear lens


SATT-CE-RS-EC-06-B
with bronze lens

Mounting Accessories




SATT-LNS-SEALS

Replaceable lens seam seals



JBOX-LP

Junction box, low profile



BS-CC-8

Wall wireway, 8' Black Base &
Conduit Cover



BSL-PC-1/4

1/4" Flex Conduit, Black

Power Supplies

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-D	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-D				2	2x60W	2x5A
	ADUL-240-3-5-12-D				3	3x60W	3x5A
	ADUL-320-4-5-12-D				4	4x60W	4x5A

ADUL - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DOT	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DOT				2	2x60W	2x5A
	ADUL-240-3-5-12-DOT				3	3x60W	3x5A
	ADUL-320-4-5-12-DOT				4	4x60W	4x5A

ADUL - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DIN	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DIN				2	2x60W	2x5A
	ADUL-240-3-5-12-DIN				3	3x60W	3x5A


ADUL - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	2	2x60W	2x5A
	ADUL-240-3-5-12-DIN-3				3	3x60W	3x5A
	ADUL-320-4-5-12-DIN-4				4	4x60W	4x5A

INFINITY - MLV / ELV / 0-10V / PWM / TRIAC


DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-2.5-12	Indoor / Outdoor	100 - 277V AC	12V DC	1	30W	3W	2.5A
	INF-J-60-1-5-12				1	60W	6W	5A
	INF-J-180-3-5-12				3	3x60W	3x6W	3x5A
	INF-J-300-5-5-12				5	5x60W	5x6W	5x5A

Replacement Part




TT-LED-XX

XX = 19, 27, 30, 35, 40, AM, BL, RD
Replacement Titanium LED




SATT-XX-STRAND-XX

XX (spacing) = 04, 06, 12, 18
XX (color) = 19, 27, 30, 35, 40, AM, BL, RD



WW-XX-XX-8

XX = CC (Carpet to Carpet base),
CW (Carpet to Wall base)
XX = BK (Black lense),
GY (Gray lense)
Base and Cover Combo, 8' length




WW-XX-BS-8

XX = CC (Carpet/carpet),
CW (Carpet/wall)
Black base only 8' length



WW-CE-XX-8

XX = BK (Black), GY (Gray)
Carpet to edge black base
with choice cover 8' length



WW-CE-BS-8


Carpet to edge
Black base only 8' length



WW-TC-XX-8

XX = CL (Clear) BK (Black), BZ (Bronze), GY (Gray)
Top Cover Wire Way lens,
8' length

TwoTone Bullnose & Accessories



BNS-TT-R-12

Step Reducer, 12' section




ADH-MB-75AM-XX

XX = 10 (10.1 oz tubes, 30 per case.), 29 (29 oz tubes 12 per case)



ADH-IA-10.2-CA

End cap clear liquid adhesive,
10.2 oz tubes sold individually,
12 per case




BS-CC-8

Wall Wireway, 8' black base &
conduit cover



RONDB-1/8

Concrete Drill Bit 1/8" nail



TM-3/16

Concrete Screw 3/16" x 1 3/4"