



Project: _____ TYPE: _____

- Illuminated walkway edge delineation system for theaters and auditoriums
- Patented aisle lighting edge delineation system
- Field-cuttable, co-extruded PVC
- Titanium Series LED lighting engine
- Quick LED maintaince for replacement in field
- Impervious to water and includes an integral seal for each end
- 5 Year warranty

Dimensions

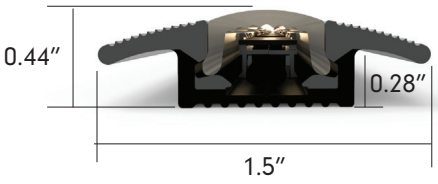

Carpet-To-Carpet
Carpet-To-Wall

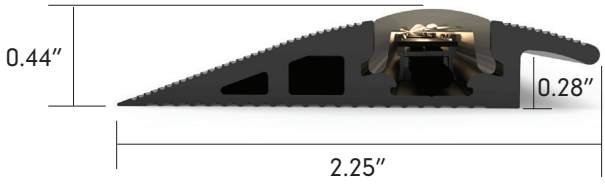

Carpet-to-Edge

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 10.16.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458



Order Guide

PRODUCT CODE		PROFILE		LED COLOR		SPACING		LENS		LENGTH
SATT	-		-		-		-		-	
SATT = Soft Aisle Titanium		**CC** = Carpet to Carpet		**19** = 1900K		**04** = 4″		**C** = Clear		**4.0** = 4′
		CW = Carpet to Wall		**27** = 2700K		**06** = 6″		**B** = Bronze		**8.0** = 8′
		CE = Carpet to Edge		**30** = 3000K		**12** = 12″				
				35 = 3500K		**18** = 18″				
				40 = 4000K						
				AM = Amber						
				RD = Red						
				BL = Blue						

Specification

Output (based on 3000K)				
LED Spacing	4″	6″	12″	18″
Watts/ft	0.0036	0.0024	0.0012	0.0008
CRI	>80 / TYP 83			
Availalbe Kelvin Temp	1900K, 2700K, 3000K, 3500K, 4000K, Red, Blue, Amber			
Electrical				
Input Voltage	12V			
Control	DMX			
Dimming	Not recommended due to low wattage consumption			
Maximum Run	120′ / <1W			
Physical				
LED Package	Tivoli Titanium LED			
Order Increments	4′, 8′			
Operating Temperature	-40°F (-40°C) ~ +140°F (+60°C)			
Certification and Testing				
Certification	ETL Listed			
Lumen Maintenance (L70)	75,000 hrs			
Environment	IP54			
Warranty	5 years			

Tivoli, LLC. reserves the right to modify this specification without prior notice.


Copyright © 2021 Tivoli 10.16.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

End Caps



SATT-CW-CC-EC-06
Left/Right End Cap
carpet to wall/carpet assembly
includes 6" pre-mitered length
with clear lens.
SATT-CW-CC-EC-06-B
with bronze lens




SATT-CE-LS-EC-06
Left End Cap
carpet to edge assembly
includes 6" pre-mitered length
with clear lens
SATT-CE-LS-EC-06-B
with Bronze Lens




SATT-CE-RS-EC-06
Right End Cap
carpet to edge assembly
includes 6" pre-mitered length
with clear lens
SATT-CE-RS-EC-06-B
with bronze lens


Mounting Accessories



SATT-LNS-SEALS
Replaceable lens seam seals



JBOX-LP
Junction box, low profile



BS-CC-8
Wall wireway, 8' Black Base &
Conduit Cover



BSL-PC-1/4
¼" Flex Conduit, Black

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Power Supplies

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-D	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-D				2	2x60W	2x5A
	ADUL-240-3-5-12-D				3	3x60W	3x5A
	ADUL-320-4-5-12-D				4	4x60W	4x5A

ADUL - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DOT	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DOT				2	2x60W	2x5A
	ADUL-240-3-5-12-DOT				3	3x60W	3x5A
	ADUL-320-4-5-12-DOT				4	4x60W	4x5A

ADUL - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DIN	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DIN				2	2x60W	2x5A
	ADUL-240-3-5-12-DIN				3	3x60W	3x5A

ADUL - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	2	2x60W	2x5A
	ADUL-240-3-5-12-DIN-3				3	3x60W	3x5A
	ADUL-320-4-5-12-DIN-4				4	4x60W	4x5A

INFINITY - MLV / ELV / 0-10V / PWM / TRIAC


DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-2.5-12	Indoor / Outdoor	100 - 277V AC	12V DC	1	30W	3W	2.5A
	INF-J-60-1-5-12				1	60W	6W	5A
	INF-J-180-3-5-12				3	3x60W	3x6W	3x5A
	INF-J-300-5-5-12				5	5x60W	5x6W	5x5A

Tivoli, LLC. reserves the right to modify this specification without prior notice.


Copyright © 2021 Tivoli 10.16.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458


Replacement Part




TT-LED-XX
XX = **19, 27, 30, 35, 40, AM, BL, RD**
Replacement Titanium LED




SATT-XX-STRAND-XX
XX (spacing) = **04, 06, 12, 18**
XX (color) = **19, 27, 30, 35, 40, AM, BL, RD**




WW-XX-XX-8
XX = **CC** (Carpet to Carpet base),
CW (Carpet to Wall base)
XX = **BK** (Black lense),
GY (Gray lense)
Base and Cover Combo, 8′ length



WW-XX-BS-8
XX = **CC** (Carpet/carpet),
CW (Carpet/wall)
Black base only 8′ length



WW-CE-XX-8
XX = **BK** (Black), **GY** (Gray)
Carpet to edge black base with choice cover 8′ length




WW-CE-BS-8
Carpet to edge
Black base only 8′ length




WW-TC-XX-8
XX = **CL** (Clear) **BK** (Black), **BZ** (Bronze), **GY** (Gray)
Top Cover Wire Way lens, 8′ length

TwoTone Bullnose & Accessories




BNS-TT-R-12
Step Reducer, 12′ section



ADH-MB-75AM-XX
XX = **10** (10.1 oz tubes, **30** per case.), **29** (29 oz tubes **12** per case)




ADH-IA-10.2-CA
End cap clear liquid adhesive, 10.2 oz tubes sold individually, 12 per case



BS-CC-8
Wall Wireway, 8′ black base & conduit cover

RONDB-1/8
Concrete Drill Bit ¹/8″ nail



TM-3/16
Concrete Screw 3/16″ x 1 ³/₄″

Tivoli, LLC. reserves the right to modify this specification without prior notice.