


Project: _____ Type: _____

- Compact (1¼" x 7/8"), visible light source tamper-resistant linear LED lighting system
- Optically clear polycarbonate co-extruded directional lens features 45° lighting cut-off angle to illuminate pathway and delineate wall simultaneously
- Base and lens available 4' and 8' field cuttable lengths
- End-to-end continuous mounting with continuous through wires minimize voltage drop
- Use with Tivoli's patented two-tone bullnose stair nosing with reflective edge step delineation

Dimensions

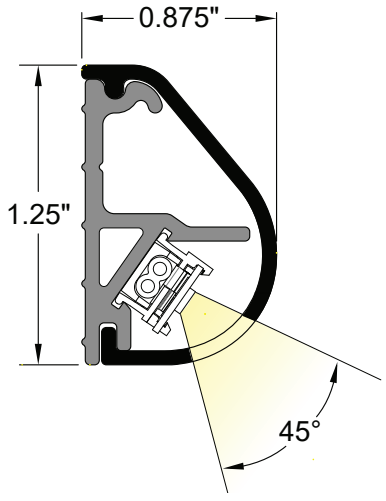

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © 2021 Tivoli 01.27.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Ordering Guide


PRODUCT CODE		PCB SPACING		LED BOTTOM		FINISH		FIXTURE LENGTH
UWTT	-		-		-	**M**	-	**8.0**
UWTT = Usher Wall Titanium		**06** = 6″ **12** = 12″		**19** = 1900K **27** = 2700K **30** = 3000K **35** = 3500K **40** = 4000K **AM** = Amber **RD** = Red **BL** = Blue		M = Matte		8.0 = 8′

Specification


6″ OC				
LED Color	1900K - 4000K	Red	Blue	Amber
*Lumens/ft	9	N/A		
*Watts/ft	0.34	0.58	0.96	0.8
*Lumen/Watt	26	N/A		
Max Run Length	100′	70′	55′	55′
12″ OC				
LED Color	1900K - 4000K	Red	Blue	Amber
*Lumens/ft	4.5	N/A		
*Watts/ft	0.17	0.29	0.48	0.4
*Lumen/Watt	26	N/A		
Max Run Length	120′	80′	55′	55′
CRI	>80/TYP83			
Kelvin Temp	1900K, 2700K, 3000K, 3500K, 4000K (+/-80K) 3SDCM, Red, Blue, Amber			
Rated Life	75,000 hrs.			
Order Increments	8′ Sections			
Operating Voltage	12V DC			
Power Supply	Class 2			
Dimmable	Yes			

*Based on 3000K Sample


Replacement Parts




UTT-LED-XX
XX = **19** (1900K), **27** (2700K), **30** (3000K), **35** (3500K), **40** (4000K), **AM** (amber), **BL** (blue), **RD** (red)



UTT-06-STRAND-XX
XX = **19** (1900K), **27** (2700K), **30** (3000K), **35** (3500K), **40** (4000K), **AM** (amber), **BL** (blue), **RD** (red)
6 Modules per foot replacement strand with LEDS



UTT-12-STRAND-XX
XX = **19** (1900K), **27** (2700K), **30** (3000K), **35** (3500K), **40** (4000K), **AM** (amber), **BL** (blue), **RD** (red)
12 Modules per foot replacement strand with LEDS




UTT-EC-X
X = **L** (left), **R** (right)
End Cap

Tivoli, LLC. reserves the right to modify this specification without prior notice.


Copyright © 2021 Tivoli 01.27.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458


Mounting Accessories



JBOX-LP
Junction box, low profile




BS-CC-8
Wall wireway, 8' Black Base & Conduit Cover




BSL-PC-1/4
0.25" Flex Conduit, Black




TM-2-3/8
Self tapping wall screw, Phillips profile - 2 3/8" length




TM-1-1/2
Self tapping, deep cutting, corkscrew-like thread, Phillips profile - 1 1/2" length




UWTT-D-JNT
Usher downward wall joint




UWTT-LENS-M-8
Usher lens - 8'
WLS-BASE-8
Wall light system base - 8'




UWTT-O-CRNR
Usher outside corner joint, matte black



UWTT-I-CRNR
Usher inside corner joint, matte black



UWTT-U-JNT
Usher upward wall joint



TT-JUMPER-2
24 inch jumper/ lead wire

Tivoli, LLC. reserves the right to modify this specification without prior notice.

In-Wall Controls





Touchscreen

TVOQ-1-WH
White





Touchscreen

TVOQ-10-XX-7
XX = **BK** (Black), **WH** (White)





Touchscreen


TVOQ-2-BK
Black

Tivoli, LLC. reserves the right to modify this specification without prior notice.


Copyright © 2021 Tivoli 01.27.2026

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458


TwoTone Bullnose & Accessories




BNS-XXX-GY-12
XXX = **TT** (black/gray), **TT2** (black/2″gray), **SC** (solid gray)
TwoTone Bullnose, 12′ length




BNS-TT-EC-X
X = **L** (left side), **R** (right side)
Bullnose Overlap End Caps, black




BNS-CC-TT-EC-X
X = **L** (left side), **R** (right side)
Bullnose Carpet to Carpet End Caps, black



BS-CC-8
Wall Wireway, 8′ black base & conduit cover



BNS-TT-R-12
Step Reducer, 12′ section




STP-EXTNDR-12
Bullnose Step Landing Tread Extender, 12′




ADH-MB-75AM-XX
XX = **10** (10.1 oz tubes, **30** per case.), **29** (29 oz tubes **12** per case)



ADH-IA-10.2-CA
End cap clear liquid adhesive, 10.2 oz tubes sold individually, 12 per case




WW-XX-XX-8
XX = **CC** (Carpet to Carpet base), **CW** (Carpet to Wall base)
XX = **BK** (black lense), **GY** (gray lense)
Base and Cover Combo, 8′ length




WW-XX-BS-8
XX = **CC** (Carpet to Carpet), **CW** (Carpet to Wall)
Base Only, black, 8′ length




WW-TC-XX-8
XX = **CL** (clear) **BK** (black), **BZ** (bronze), **GY** (gray)
Top Cover Wire Way lens, 8′ length



TM-3/16
Concrete Screw 3/16″ x 1 3/4″



WW-CE-XX-8
XX = **BK** (black), **GY** (gray)
Carpet to Edge Base and Cover Combo, 8′ length



WW-CE-BS-8
Base Only, Carpet To Edge, black, 8′ length



RONDB-5/32
Concrete Drill Bit 5/32″

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Recommended Power Supplies

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-D	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-D				2	2x60W	2x5A
	ADUL-240-3-5-12-D				3	3x60W	3x5A
	ADUL-320-4-5-12-D				4	4x60W	4x5A

ADUL - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DOT	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DOT				2	2x60W	2x5A
	ADUL-240-3-5-12-DOT				3	3x60W	3x5A
	ADUL-320-4-5-12-DOT				4	4x60W	4x5A

ADUL - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DIN	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DIN				2	2x60W	2x5A
	ADUL-240-3-5-12-DIN				3	3x60W	3x5A

ADUL - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 50/60 HZ	12V DC	2	2x60W	2x5A
	ADUL-240-3-5-12-DIN-3				3	3x60W	3x5A
	ADUL-320-4-5-12-DIN-4				4	4x60W	4x5A

INFINITY - MLV / ELV / 0-10V / PWM / TRIAC

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-2.5-12	Indoor / Outdoor	100 - 277V AC	12V DC	1	30W	3W	2.5A
	INF-J-60-1-5-12				1	60W	6W	5A
	INF-J-180-3-5-12				3	3x60W	3x6W	3x5A
	INF-J-300-5-5-12				5	5x60W	5x6W	5x5A

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Recommended Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)

DIMMING - MLV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

DIMMING - ELV

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W

DIMMING - DMX

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT PROTOCOL	MAX UNIVERSE
DMX Controller	TVOQ-1-WH	Indoor	5V DC	DMX 512	1
	TVOQ-2-BK		6V DC		
	TVOQ-2-WH				
	TVOQ-10-BK-7		6-7V DC		
	TVOQ-10-WH-7				2

Tivoli, LLC. reserves the right to modify this specification without prior notice.