

# ADAPT

COMMERCIAL STRAND LIGHT 120V



tivoli®

### ADAPT COMMERCIAL STRING LIGHT- How it works

Choose your cord color, light engine, and multiple globe options to create a unique experience for any personal or public space.

**Choose Your Cord:**

Tivoli's standard 48' strand with (24) E26 medium base sockets. Available in black or white with 24" O.C. socket spacing.

**Order Your Light Engine:**

4W each with a lumen delivery up to 400 lumens per light engine. Available in 2700K and 3000K only.

**Multiple ADAPT Globes:**

Available in both G125 and ST19 profiles. Total of 11 styles to choose from.



Strand & Light Engine



**TCSL-S-X-24-120**  
**X = B** (black), **W\*** (white)  
 48' Commercial strnd, 24" OC  
 molded male and female end



**ALS-TF-T25-E26-4W-XXK-6PK-R**  
**XXK = 27K** (27K), **30K\*** (30K)  
 6 pcs Filament Light Engine

\*Consult Factory for MOQ

Specification

ADAPT Commercial String Light (based on 2700K)	
Socket Spacing	24"
Socket Type	E26
Socket Count	24
Cord Length	48' with male and female molded ends
Cord Type	3C x 14AWG SJTW
Cord Plug	5-15P Polarized
Cord Weight	7.85 lbs.
Field Cuttable Cord	NO
Operating Voltage	120V AC
Watts/Strand	96W based on 10% voltage drop
Max Run	Feet (384), Strand sets (8), Watts (768)
ADAPT Globe	
Globe	Glass (Shatter resistance assist with silicone coating - Glass may still break under certain conditions)
ADAPT Light Engine	
Watts/bulb	4W
Lumens/bulb	400 (Light engine only - Lumen output may varem based on globe choice)
Weight/bulb	0.10 lbs.
Kelvin Temperature	2700K, 3000K
CRI	80+
Operating Voltage	120V AC
Dimming	ELV, TRIAC
Base	E26 Medium base
Certification and Testing	
Certification	cETLus
Environment	Wet Location
IP Rating	IP65
Lifetime Hours (Light Engine)	15,000
Warranty	3 Years

**ADAPT Globe**

Note: Shatter resistance assist with silicone coating - Glass may still break under certain conditions



**LSA-ANA-N**  
Ana



**LSA-ANG-N**  
Angela



**LSA-GIN-N**  
Gina



**LSA-GAB-N**  
Gaby



**LSA-KAT-N**  
Katie



**LSA-SUS-N**  
Susan\*



**LSA-TON-N**  
Toni\*



**LSA-LUC-N**  
Lucia\*



**LSA-VIC-N**  
Victoria\*



**LSA-BRE-N**  
Brenda




**LSA-LAU-N**  
Laura\*


\*Consult Factory for MOQ and Lead Time.

**ADAPT Globe Weights & Dimensions**

Filament light engine and ST19 total weight w/48 ft. string  
13.65 lbs. w/catenary cable



Filament light engine and G25 total weight w/48 ft. string  
17.25 lbs. w/catenary cable



Mounting Accessories

**WARNING:** For suspension application, catenary cable is required to support the product, otherwise the warranty will be void.



**LS-CABLE-X**

**X = 60 (60'), 110 (110'), 500 (500')**

1/8" Galvanized cable includes (2) cable locks for use with loads up to 200lbs  
Note: 500' no locks included



**LS-LOCK-X**

**X = 2 (2 pcs), 4 (4 pcs)**

Includes (1) release key  
Cable Lock for 1/8" cable, support loads up to 200 lbs.



**LS-TT**


Cable tensioning tool up to 880lbs with 6:1 gear drive with integral torque gauge controls



**LS-UVZP-BK-XX**

**XX = 30 (30 pcs), 50 (50 pcs)**


Black UV resistant, heavy duty ties maximum weight up to 100 lbs./per tie




**TCSL-BK-EC**

PVC Field Cut End-Cap, Black


Light Shade Accessories



**SHADE-HT-BK-XX-XX**  
**XX = BK** (black), **CO\*** (copper)  
**XX = 8** (8.3"), **13\*\*** (12.6")  
 Black top, black/copper bottom  
 Weight: 0.46 lb (10), 1.2 lb (13)



**SHADE-DS-BK-BK-10**  
 10.2"  
 Black top, black bottom  
 Weight: 0.76 lb




**SHADE-FL-BK-BK-XX**  
**XX = 10** (9.8"), **13** (13.8")  
 Black top, black bottom  
 Weight: 0.63 lb (10), 1.48 lb (13)



**SHADE-ADP-CSL-BK-XX**  
**XX = 25** (25 pcs), **01** (1 pc)  
 PVC shade adapters black

\*Only available for 13 (Hat)    \*\*Consult factory for lead time and MOQ

Mounting Layout

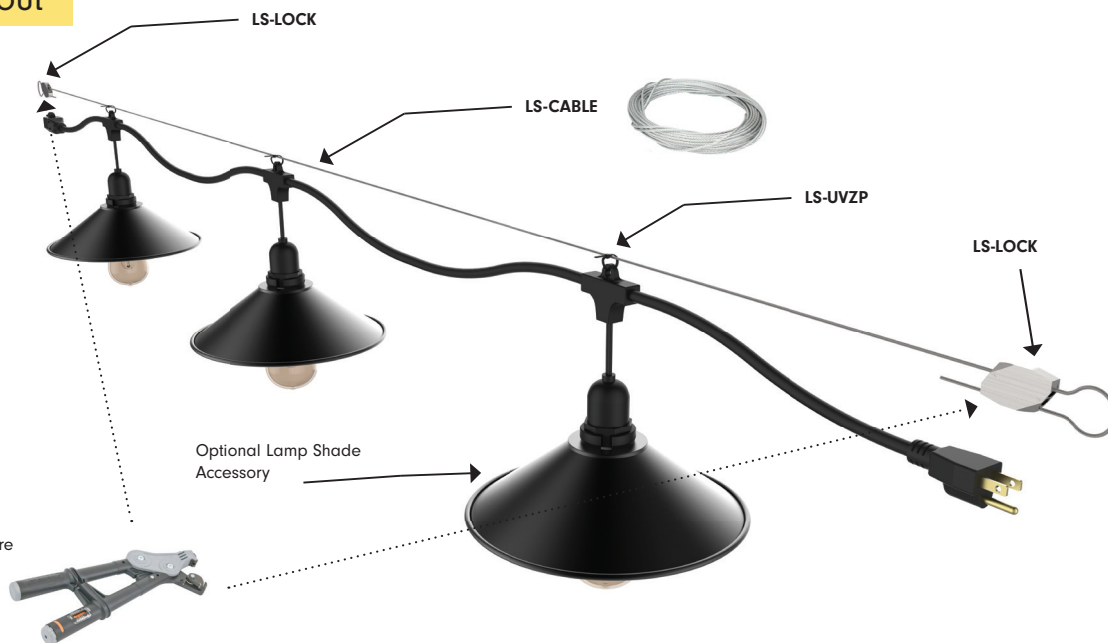

**LS-TT**  
 Catenary Cable Tensioning  
 Tool allows you to tension wire  
 up to 880lbs. with minimal  
 effort.