




Project: _____ Type: _____

- UL wet weather seal option available
- Optional switch
- Available GFCI or standard dual 3 prong outlet
- Heavy-gauge extruded aluminum
- Available in 6", 12", 18" and 24" OC standard spacing
- 2.188" x 2.188" Standard Profile extrusion available
- Wiring and components are concealed
- Anti-corrosion coated (custom finished on request)
- Available in: Satin Aluminum, Powder Coated White or Powder coated black
- Custom radial bends
- Optional 4 channel chase wiring is available
- Pre-wired for quick and easy installation
- 7/8" diameter knockouts on mounting side (custom optional end cap knockouts)

Dimensions

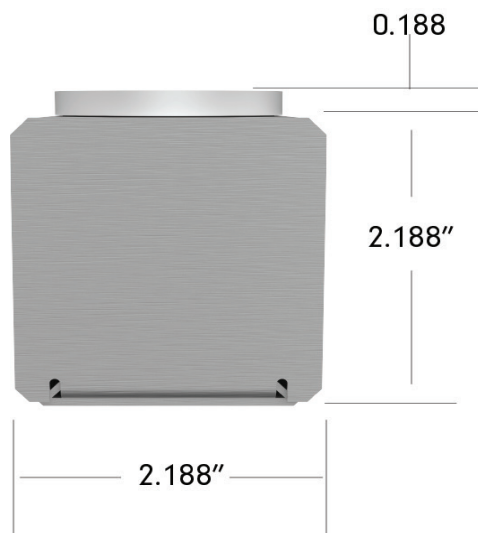

Order Guide

AC Standard Architectural Channel maximum length 12'

PRODUCT CODE	SOCKET TYPE	LAMP SPACING	FINISH	OPTIONAL CHASSING	OPTIONAL WEATHER SEAL
AC	MB				
AC = Standard	MB = Medium Base	06 = 6" OC 12 = 12" OC 18 = 18" OC 24 = 24" OC	SA = Satin Aluminum BK = Black Powder Coat WH = White Powder Coat	C = 4 Channel Chasing	WS1 = Weather Seal (Required for Outdoor Applications)


Specification

Electrical	
Operating Voltage	120V AC/ 240V AC
Physical	
Dimensions	AC Standard 2.188" W x 2.188" H (without bulb)
Socket Spacing*	6", 12", 18" and 24" OC
Order increments	1' (12' max)
Housing	Aluminum
American Wire Gauge	20 AWG
Mounting	Surface Mount, Suspended
Knock-out Holes	Every 24" along mounting face of channel
Sockets	Medium Base, E26/E27
Lamps (By others)	60W max
Certification and Testing	
Certification	cULus
Environment	Dry/Wet Location
IP Rating	IP54/IP65
Warranty	3 Years


*Custom lamp spacing available (consult factory)

**Custom paint or anodizing available (consult factory)


Accessories and Joiners




AC-90
Flat 90° (Standard)
Internal 90° Bracket




AC-45
45° Bracket (Standard)
Internal 45° Bracket




AC-T
T Bracket (Standard)
internal T-bracket




AC-180
Internal Connector (Standard)



AC-EC-XX
XX = **SA** (Satin Aluminum),
PW (Powder Coated White),
PB (Powder Coated Black)
End Caps




AC-90-OI
90° (Standard Outside/Inside)
Internal 90° Bracket




CC-120V
120V 4 Channel , 8 Pattern
Chase Controller


Channel Configurations




RADIUS
Radius bend set up charge
(Over 3' Radius)
Note: Indicate lamp position at
time of ordering




RADIUS-3
Radius bend set up charge
(Under 3' Radius)
Note: Indicate lamp position at
time of ordering



R-UNITS
Radius unit charge, Per 8' Max
length
Note: Indicate lamp position at
time of ordering

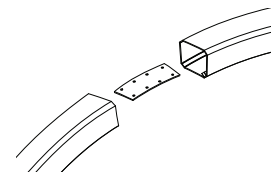

AC-RADIUS
Internal Bracket



AC-MITER
Factory Miter Cut