


Project: _____ TYPE: _____

- Riveted Wire Guard meets NEC #520.72 standard
- Heavy-gauge extruded aluminum
- Available in 6", 9", 12" and 18" OC standard spacing
- Wiring and components are concealed
- Anti-corrosion coated (Custom Finished on Request)
- Custom radial bends
- 2.188" x 2.188" Standard Profile extrusion available
- Optional 4 Channel chase wiring is available
- Configurable for freight optimization
- Pre-wired for quick and easy installation
- Knock-out holes for screws are provided every 24"
- 7/8" diameter knockouts on mounting side (custom optional end cap knockouts)

Dimensions

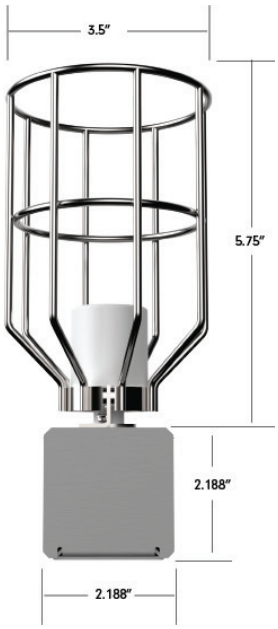

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 11/11/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Order Guide

AC Standard Architectural Channel maximum length 12'

PRODUCT CODE	SOCKET TYPE	LAMP SPACING	FINISH	OPTIONAL CHASSING
AC	**WB**			
AC = Standard	WB = Wire Guard Base	**06** = 6" OC **09** = 9" OC **12** = 12" OC **18** = 18" OC **24** = 24" OC	**SA** = Satin Aluminum **BK** = Black Powder Coat **WH** = White Powder Coat	**CC1** = 120V 4 Channel Chasing **CC2** = 220/240V 4 Channel Chasing


Specification

Electrical	
Operating Voltage	120V AC/ 240V AC
Physical	
Dimensions	AC Standard 2.188" W x 2.188" H (without bulb)
Socket Spacing*	6", 9", 12", 18" and 24" OC
Order increments	1' (12' max)
Housing	Alluminum
American Wire Gauge	20 AWG
Mounting	Surface Mount, Suspended
Knock-out Holes	Every 24" along mounting face of channel
Sockets	Medium Base, E26/E27
Lamps (By others)	60W max
Certification and Testing	
Certification	cULus
Environment	Dry Location
IP Rating	IP54
Warranty	5 Years


*Custom lamp spacing available (consult factory)
**Custom paint or anodizing available (consult factory)

Tivoli, LLC. reserves the right to modify this specification without prior notice.


Compatible Tivolite




TVLT-A19-X-X-26-XX-120
X (Filament Count) = **2**, 4, **6**
X = ***F** (Frosted), **V** (Vintage),
C (Clear)
XX (CCT) = **22**, ****24**, **27**
A19 Tivolite Bulb




TVLT-S14-X-X-26-XX-120
X (Filament Count) = **2**, **4**
X = ***F** (Frosted), **V** (Vintage),
C (Clear)
XX (CCT) = **22**, ****24**, **27**
S14 Tivolite Bulb




L19-6.5-ST19-V-24-D
ST19 Tivolite Vintage Bulb
2400K



L19-6.5-A19-V-24-D
A19 Tivolite Vintage Standard Bulb
2400K




L19-6.5-A19-F-27-D
A19 Tivolite Vintage Frosted Bulb
2700K




L19-6.5-G25-V-24-D
G25 Tivolite Vintage Bulb
2400K

*Note: Available only in 4 and 6 filament for A19 & S14 type
**MOQ - Consult Factory


Accessories and Joiners




AC-90
Flat 90° (Standard)
Internal 90° Bracket




AC-45
45° Bracket (Standard)
Internal 45° Bracket




AC-T
T Bracket (Standard)
internal T-bracket




AC-180
Internal Connector (Standard)




AC-EC-XX
XX = **SA** (Satin Aluminum),
PW (Powder Coated White),
PB (Powder Coated Black)
Standard Profile End Caps



AC-90-OI
90° (Standard Outside/Inside)
Internal 90° Bracket




CC4-120V
120V 1-4 Channel
Chase Controller with
adjustable chase speed rate
of 1-30 step per/sec.



CC4-220V
220V-240V 1-4 Channel
Chase Controller with
adjustable chase speed rate
of 1-30 step per/sec.


Tivoli, LLC. reserves the right to modify this specification without prior notice.

Channel Configurations




AC-GFCI-XX
XX = **WH** (White), **BK** (Black)
UL Listed 15 Amp 125-Volt Duplex SmarTest Self-Test SmartlockPro Tamper Resistant GFCI Outlet


Channel Configurations




RADIUS
Radius bend set up charge (Over 3' Radius)
Note: Indicate lamp position at time of ordering




RADIUS-3
Radius bend set up charge (Under 3' Radius)
Note: Indicate lamp position at time of ordering



R-UNITS
Radius unit charge, Per 8' Max length
Note: Indicate lamp position at time of ordering



AC-RADIUS
Internal Bracket



AC-MITER
Factory Miter Cut

Tivoli, LLC. reserves the right to modify this specification without prior notice.