

ASTORIA
Design Guide



Profile & Dimensions

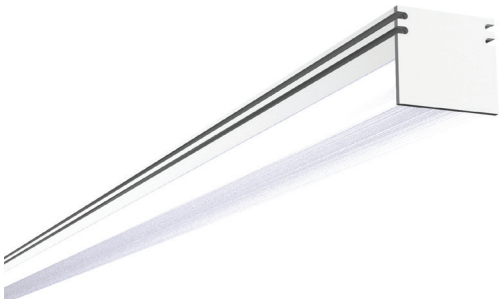



Available TivoTape Options - Indoor

DEFINE
SB
HO
LB

ELITE
SB
HO
VHO

ELITE+
Plus
Pro
Vision
Flow
DUO

COB
LB
HO

FUSE24
RGB
RGB+W
RGB+W+W
DW
Pixle24 RGB
Pixle24 RGBW

FUSE12
Pixel12 RGB

Available TivoTape Options - Outdoor

DEFINE
SB

FUSE24
RGB

Ordering Information



ASTR-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5′ lengths



ASTR-LNS-XXX-6.5
XXX = **CLR** (Clear),**DIF** (Diffused) lens, length 6.5′



ASTR-EC-01
Solid End Cap



ASTR-EC-02
Powerfeed End Cap



ASTR-CLP-SLV
Clip, Metal




UNIV-ADJ-MTBK
Universal Adjustable Mounting Bracket

Tivoli, LLC. reserves the right to modify this specification without prior notice.


Copyright © Tivoli 01/05/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Photometrics (based on 30K HO ELITE)

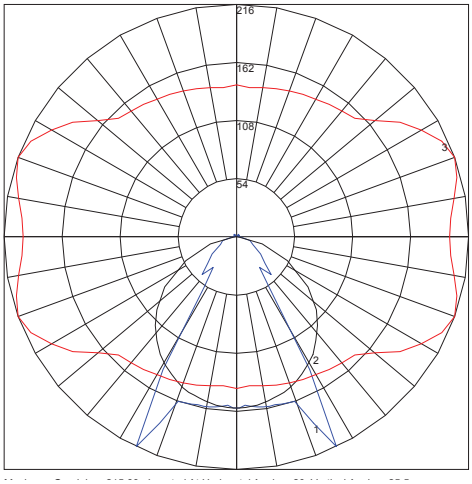

ASTORIA WITH CLEAR LENS
Lumens per foot: 342.57
Watts per foot: 4
CRI : 94.6
Peak Candela: 158.96

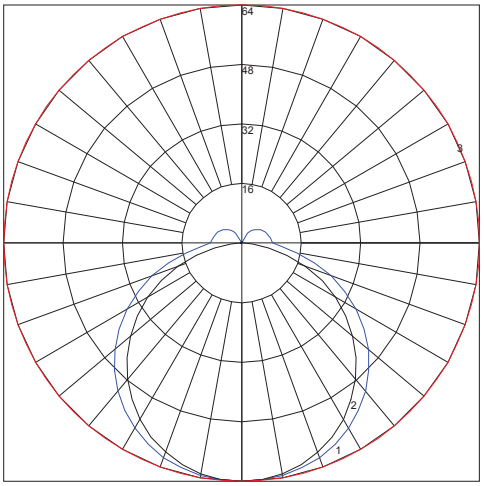

ASTORIA WITH DIFFUSED LENS
Lumens per foot: 230.97
Watts per foot: 4
CRI : 95.2
Peak Candela: 64.47


Diode Visibility



Diffused lens



Clear lens

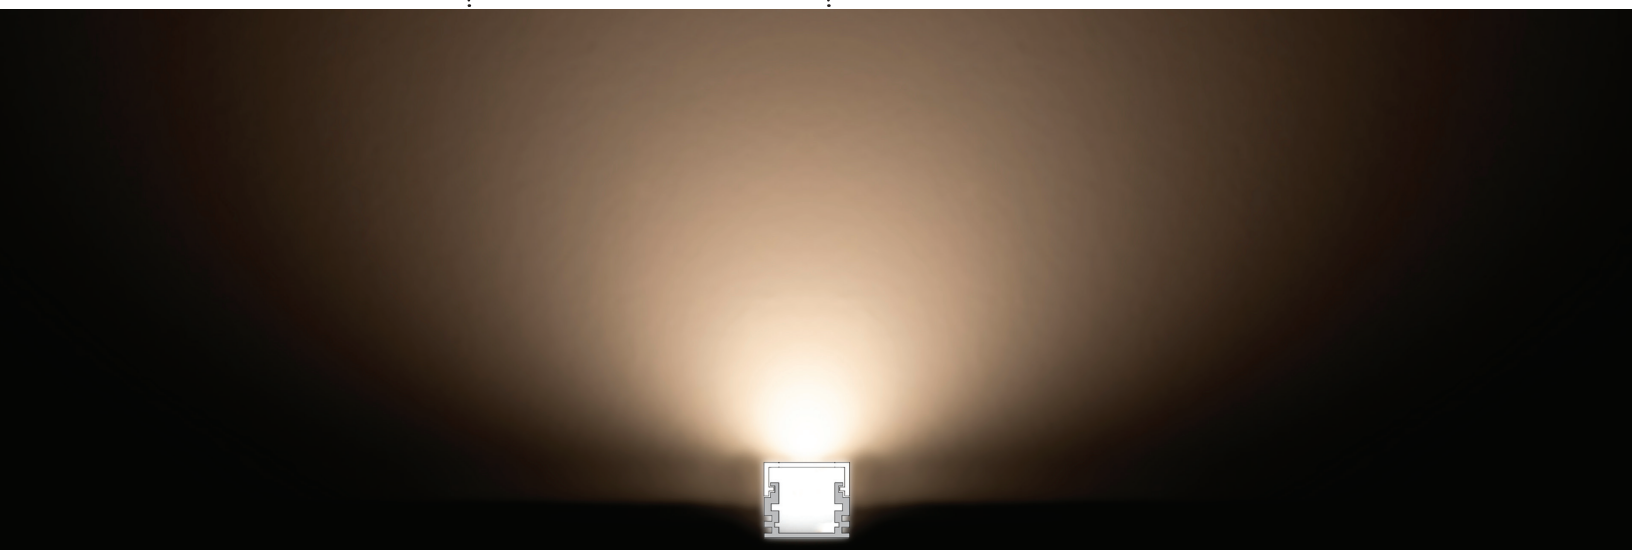

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 01/05/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458