



ASTORIA

Design Guide

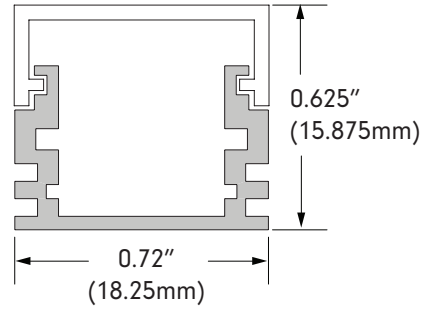

Profile & Dimensions

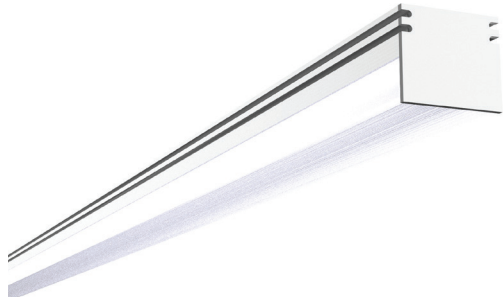

Available TivoTape Options - Indoor

DEFINE SB HO LB	ELITE SB HO	ELITE+ Standard Pro Vision Flow	FUSE24 RGB RGBW	FUSE12 PiXEL RGB
---------------------------------	--------------------------	--	------------------------------	----------------------------

Available TivoTape Options - Outdoor

DEFINE SB HO LB	FUSE24 RGB	FUSE12 PiXEL RGB
---------------------------------	----------------------	----------------------------

Ordering Information



ASTR-CHAN-SLV-6.5
 Anodized Aluminum Extrusion, available in 6.5' lengths



ASTR-LNS-XXX-6.5
XXX = CLR (Clear), **DIF** (Diffused) lens, length 6.5'



ASTR-EC-01
 Solid End Cap




ASTR-EC-02
 Powerfeed End Cap




ASTR-CLP-SLV
 Clip, Metal

Photometrics (based on 30K HO ELITE)

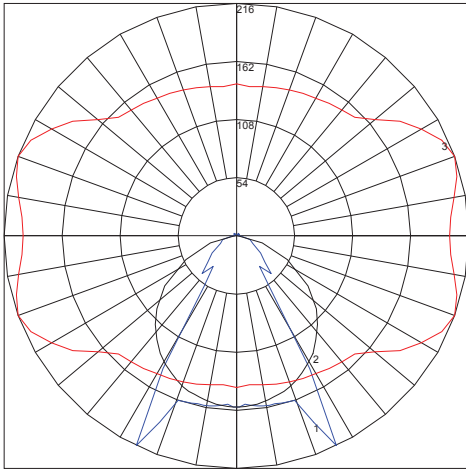


ASTORIA WITH CLEAR LENS
 Lumens per foot: 342.57
 Watts per foot: 4
 CRI : 94.6
 Peak Candela: 158.96

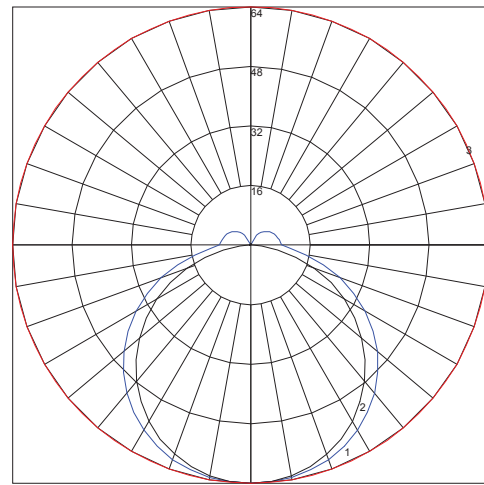

ASTORIA WITH DIFFUSED LENS
 Lumens per foot: 230.97
 Watts per foot: 4
 CRI : 95.2
 Peak Candela: 64.47

Diode Visibility



Diffused lens



Clear lens

