DEWAR
Design Guide

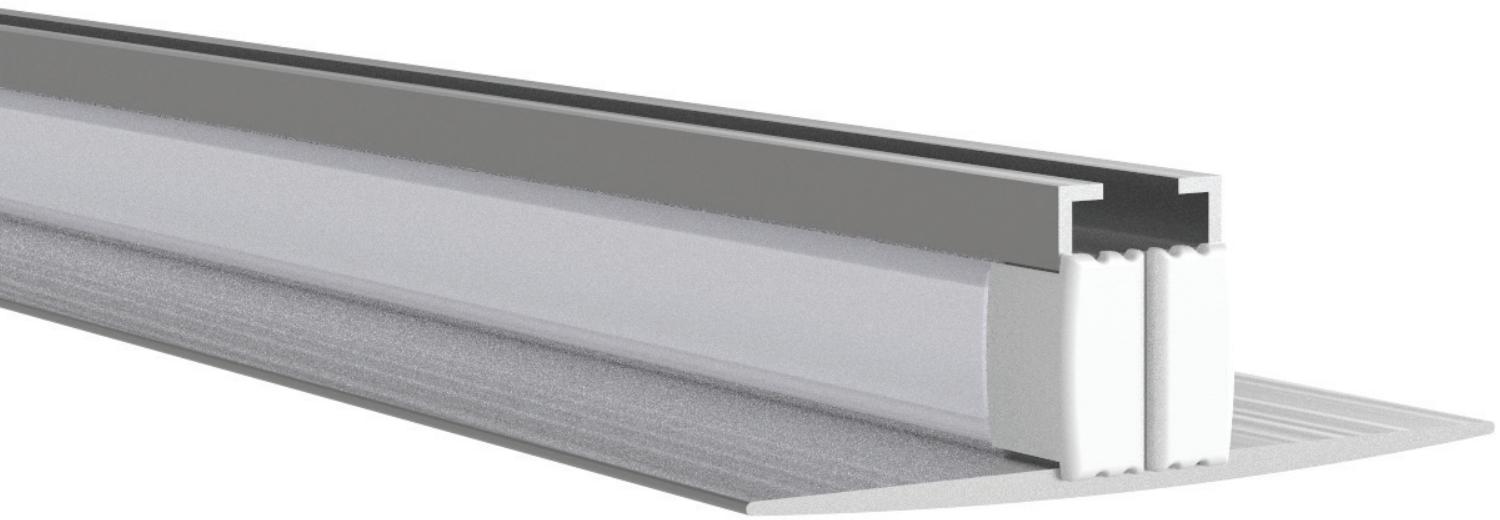

Profile & Dimensions

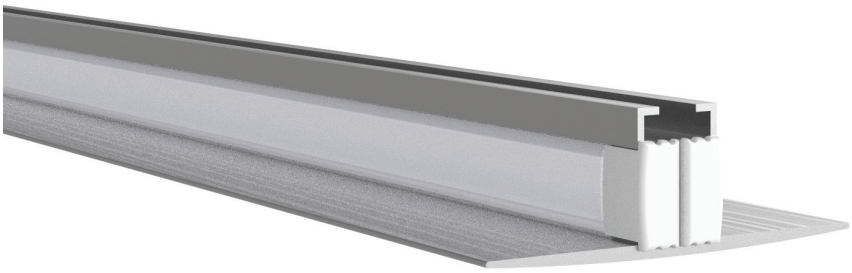

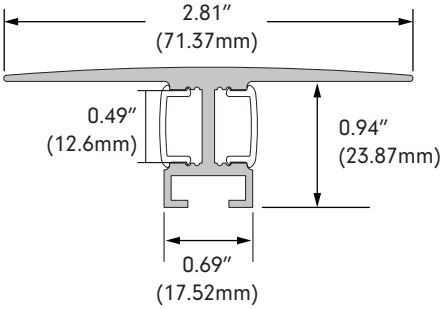

Available TivoTape Options - Indoor

DEFINE
SB
HO
LB

ELITE
SB
HO
VHO

ELITE+
Plus
Pro
Vision
Flow
DUO

COB
LB
HO

FUSE24
RGB
RGB+W
RGB+W+W
DW
Pixle24 RGB
Pixle24 RGBW

FUSE12
PiXEL12 RGB

Ordering Information



DWAR-CHAN-SLV-6.5
Anodized Aluminum Extrusion, available in 6.5′ lengths

DWAR-LNS-XXX-6.5
XXX = **OPL** (Opal), **CLR** (Clear), **DIF** (Diffuser) Lens,6.5′ Lengths

DWAR-EC-01
Solid End Cap

DWAR-EC-02
Powerfeed End Cap

DWAR-CLP-SLV
Clip, Metal

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 01/02/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Photometrics (based on 30K HO Elite)

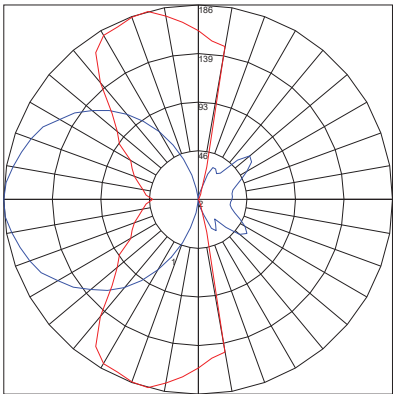

DEWAR WITH CLEAR LENS
Lumens per foot: 674.70
Watts per foot: 7.71
CRI : 94.7
Peak Candela: 185.84

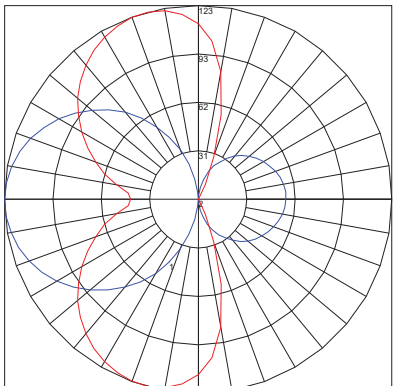

DEWAR WITH DIFFUSED LENS
Lumens per foot: 537.38
Watts per foot: 7.73
CRI : 95.3
Peak Candela: 123.39

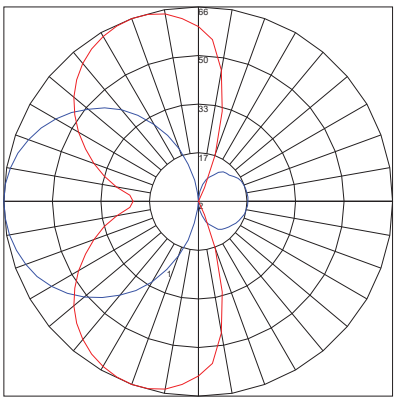

DEWAR WITH OPAL LENS
Lumens per foot: 297.85
Watts per foot: 7.76
CRI : 97.9
Peak Candela: 66.47

Diode Visibility

Opal lens

Clear lens

Diffused lens

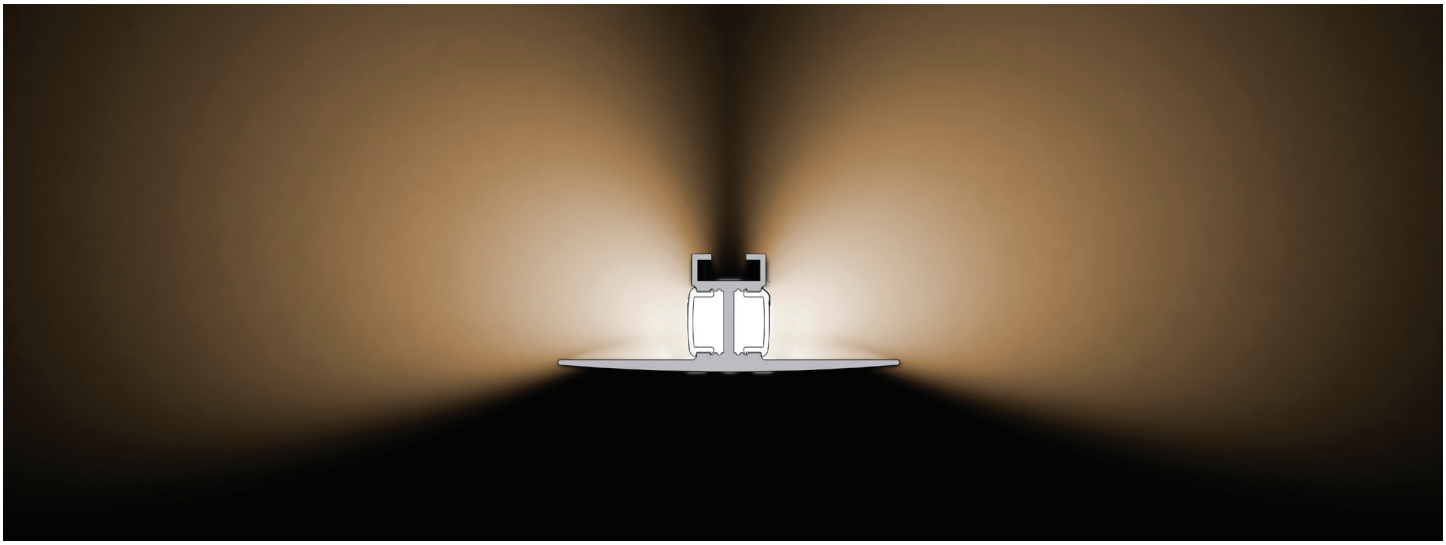

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 01/02/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458