


# DOME

Design Guide



Profile & Dimensions

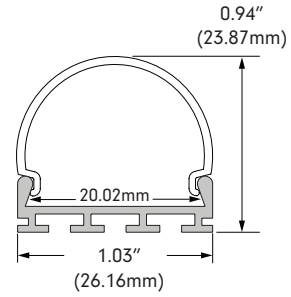

Available TivoTape Options - Indoor

**DEFINE**

LB  
SB  
HO

**ELITE**

SB  
HO  
VHO

**ELITE+**

Standard  
Pro  
Vision  
Flow  
DUO

**FUSE24**

RGB  
RGBW

**FUSE12**

PIXEL RGB

Available TivoTape Options - Outdoor

**DEFINE**

SB  
LB

**FUSE24**

RGB

**FUSE12**

PIXEL RGB

Ordering Information



**DOME-CHAN-SLV-6.5**  
Silver Anodized Aluminum  
Extrusion, 6.5' Lengths



**DOME-LNS-OP-6.5**  
Opal lens, 6.5' Lengths



**DOME-EC-01**  
Solid End Cap




**DOME-EC-02**  
Powerfeed End Cap



**DOME-MTBK**  
Dome mounting bracket

Photometrics (based on 27K DW)

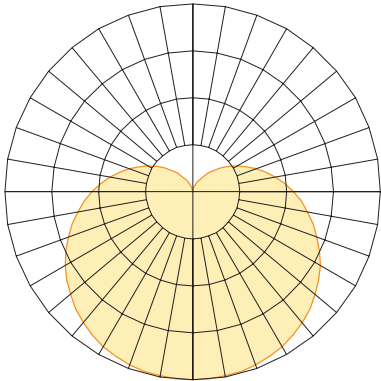

**DOMES WITH 2700K**  
Delivered Lumens per foot: 142  
Watts per foot: 3.3  
CRI : 98  
Peak Candela: 29.7

Diode Visibility



Opal lens

