DOME
Design Guide

Profile & Dimensions



Available TivoTape Options - Indoor

DEFINE
SB
HO
LB

ELITE
SB
HO
VHO

ELITE+
Plus
Pro
Vision
Flow
DUO

COB
LB
HO

FUSE24
RGB
RGB+W
RGB+W+W
DW
Pixle24 RGB
Pixle24 RGBW

FUSE12
Pixel12 RGB

Available TivoTape Options - Outdoor

DEFINE
SB
HO
LB

ELITE
SB
HO

ELITE+
Plus
Pro
Flow

FUSE24
RGB
RGB+W
RGB+W+W

FUSE12
PiXEL12 RGB

Ordering Information

DOME-CHAN-SLV-6.5
Silver Anodized Aluminum Extrusion, 6.5' Lengths

DOME-LNS-OP-6.5
Opal lens, 6.5' Lengths

DOME-EC-01
Solid End Cap

DOME-EC-02
Powerfeed End Cap

DOME-MTBK
Dome mounting bracket

UNIV-ADJ-MTBK
Universal Adjustable Mounting Bracket

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 01/02/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Photometrics (based on 27K DW)

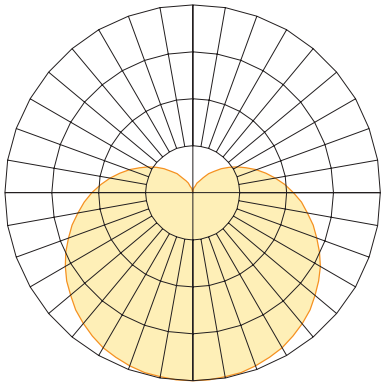

DOME WITH 2700K
Delivered Lumens per foot: 142
Watts per foot: 3.3
CRI : 98
Peak Candela: 29.7

Diode Visibility

Opal lens

Tivoli, LLC. reserves the right to modify this specification without prior notice.