



EDINGER

Design Guide

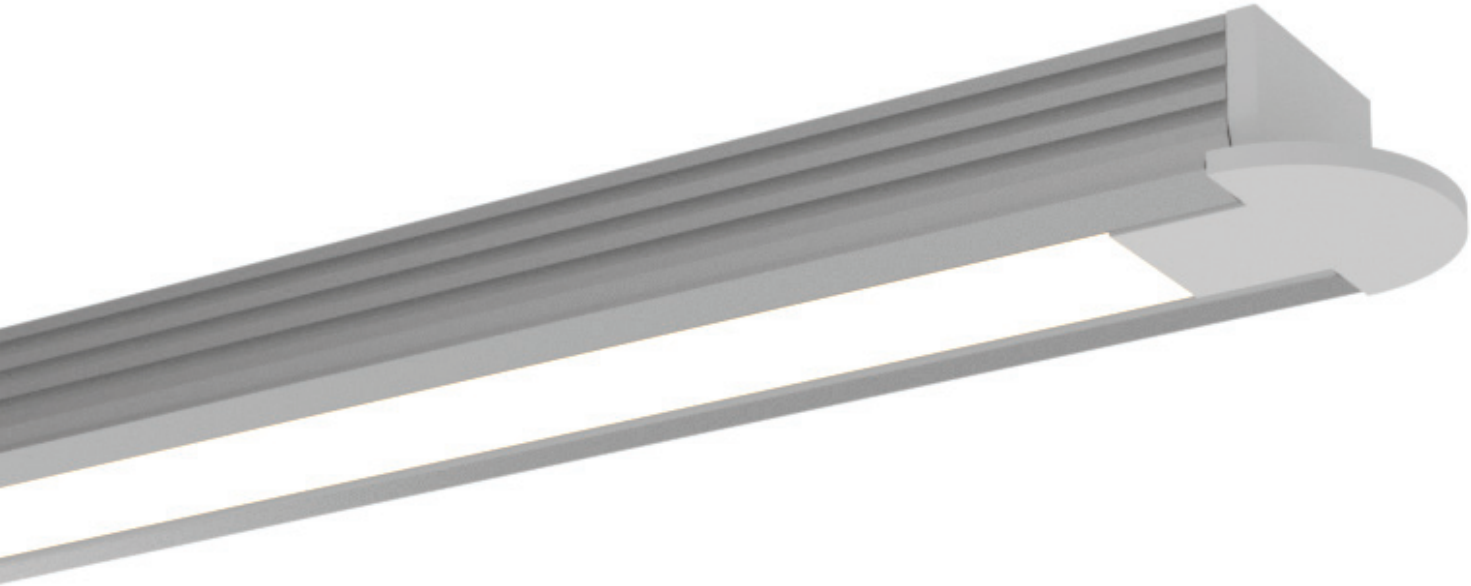

Profile & Dimensions

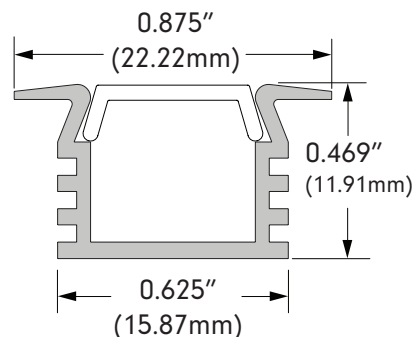


Available TivoTape Options - Indoor

DEFINE
LB
SB
HO

FUSE24
RGB

FUSE12
PiXEL RGB

Ordering Information



EDIN-CHAN-SLV-6.5
Silver Anodized Aluminum
Extrusion, 6.5' Lengths



EDIN-LNS-OP-6.5
Lens, Opal, 6.5' Lengths



EDIN-EC-01
Solid End Cap




EDIN-EC-02
Powerfeed End Cap




MTBK-03
Mounting Clip

Photometrics

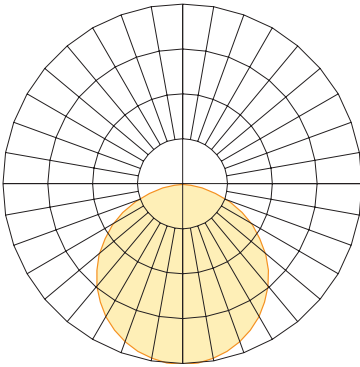

EDINGER WITH 3000K
Delivered Lumens per foot: 145
Watts per foot: 3.3
CRI : 97
Peak Candela: 55.5

Diode Visibility

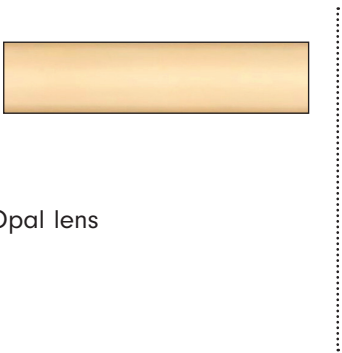

Opal lens

