

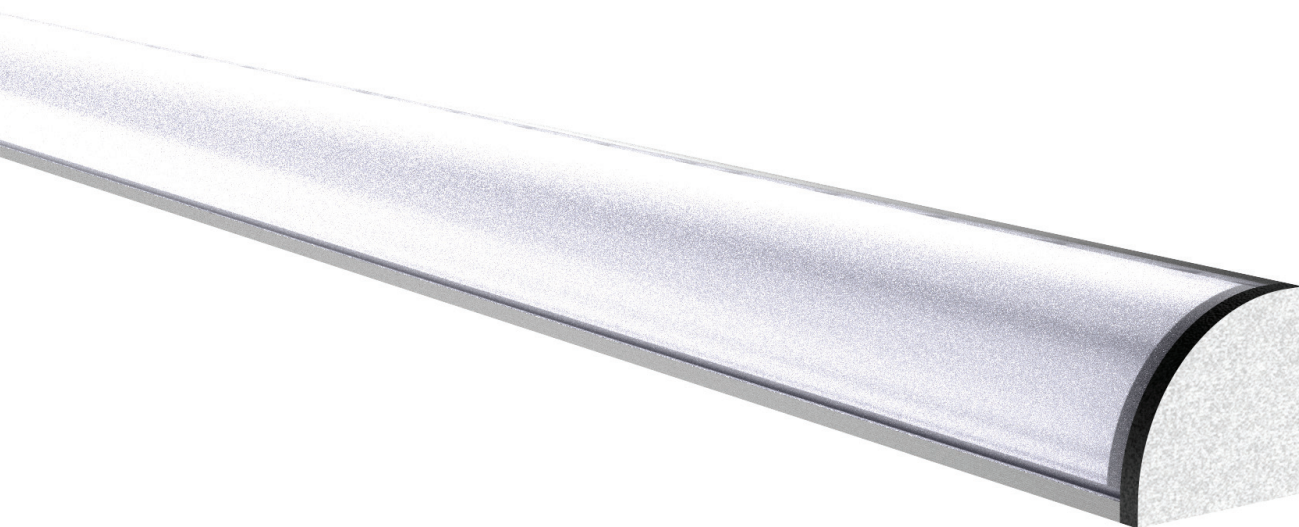


MARSALA

Design Guide

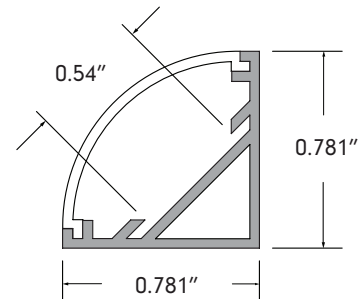

Profile & Dimensions

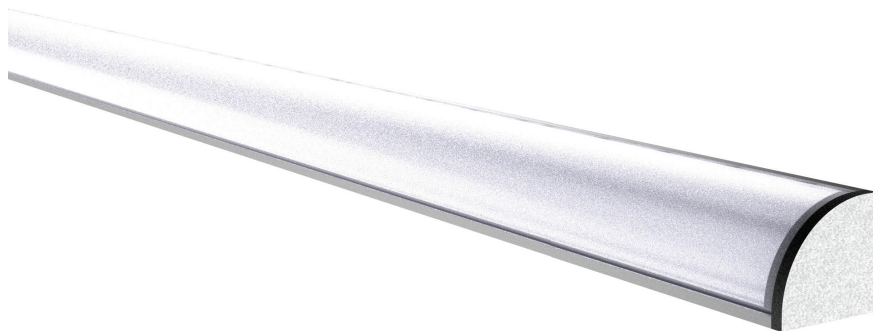

Available TivoTape Options - Indoor

DEFINE
LB
SB
HO


ELITE
SB
HO
VHO

ELITE+
Standard
Pro
Vision
Flow

FUSE24
RGB
RGBW

FUSE12
PiXEL RGB

Ordering Information



MRSL-CHAN-SLV-6.5
Silver Anodized Aluminum
Extrusion, 6.5' Lengths



MRSL-LNS-XXX-6.5
XXX = OPL (Opal), CLR,
(Clear), DIF (Diffused)
lens, length 6.5'



MRSL-EC-01
Solid End Cap




MRSL-EC-02
Powerfeed End Cap




MRSL-CLP-SLV
Clip, Silver

Photometrics

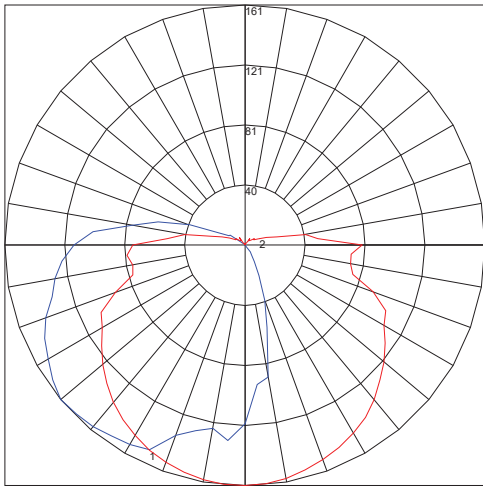

MARSALA WITH CLEAR LENS
Lumens per foot: 435.52
Watts per foot: 4
CRI : 95.1
Peak Candela: 119.82

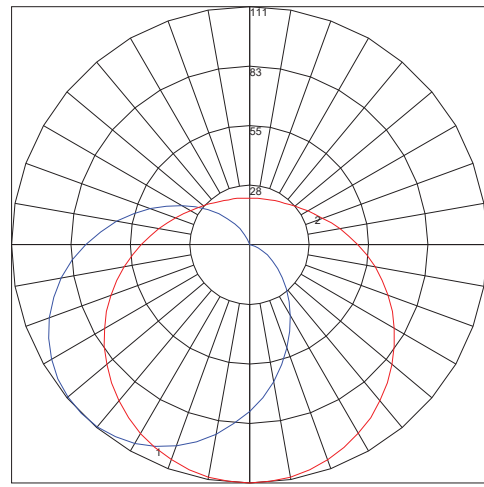

MARSALA WITH DIFFUSED LENS
Lumens per foot: 359.48
Watts per foot: 4
CRI : 95.7
Peak Candela: 110.98

